
RWY ORIENTATION

Eff 26 Oct

HOW TO CHOOSE THE CHARTS

1. Check the RUNWAY IN USE for the mission (runway number / heading in the Mission Editor).
2. Find its sector on the rose below: the runway HEADING decides N, E, S or W (not the wind).
3. Use the SID and STAR of that letter: "SQD FOX 3 - SID <letter>" and "SQD FOX 3 - STAR <letter>".

Example: runway 25 (250°) = sector W > SID W + STAR W. Runway 07 (070°) = E. Runway 36 = N. Runway 18 = S.

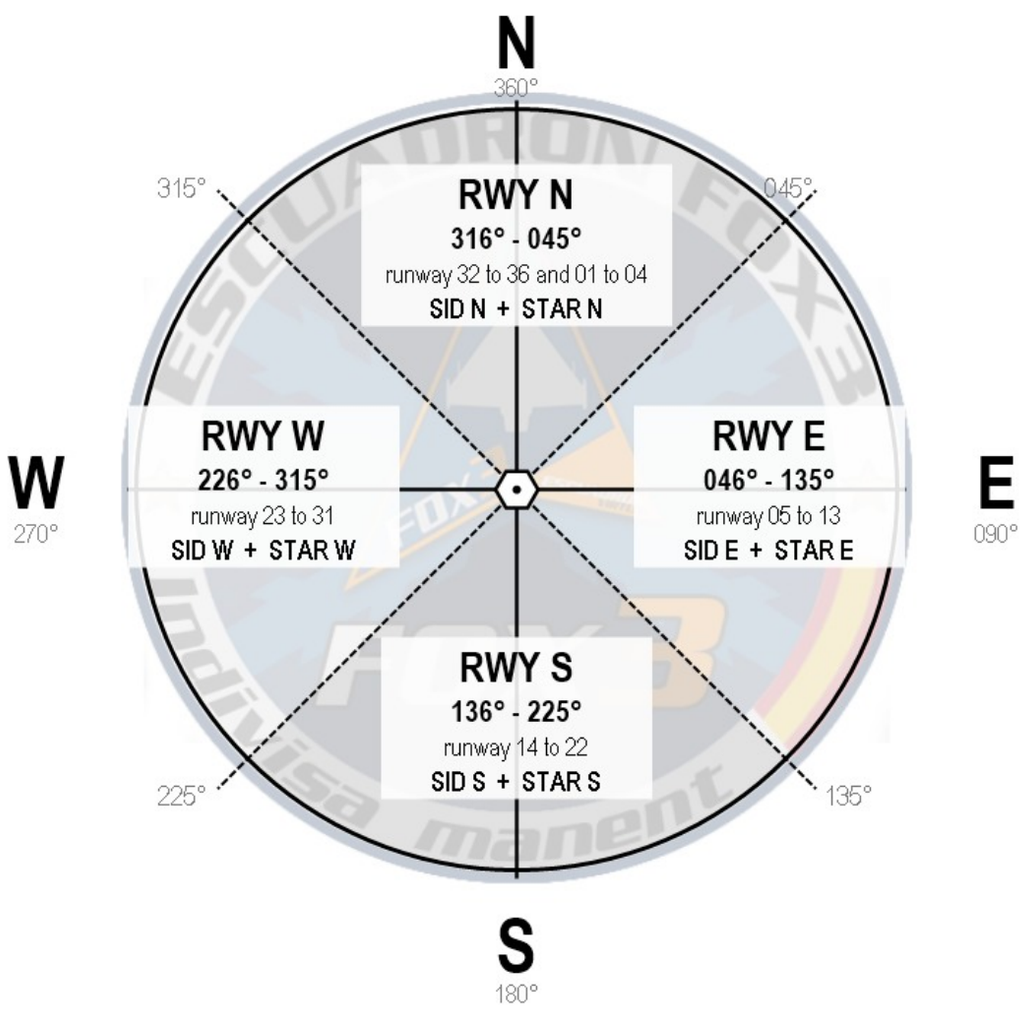

SECTOR	RUNWAY HEADING	RUNWAY NUMBER	CHARTS TO USE
N (North)	316° - 045°	32, 33, 34, 35, 36, 01, 02, 03, 04	**SID N / STAR N**
E (East)	046° - 135°	05, 06, 07, 08, 09, 10, 11, 12, 13	**SID E / STAR E**
S (South)	136° - 225°	14, 15, 16, 17, 18, 19, 20, 21, 22	**SID S / STAR S**
W (West)	226° - 315°	23, 24, 25, 26, 27, 28, 29, 30, 31	**SID W / STAR W**

NOTES

The runway number is its heading divided by 10 (runway 25 = 250°). Between two sectors (exactly 045°, 135°, 225°, 315°) use the sector of the runway number list above.

All charts use the SQD TACAN 111X beacon placed at the airfield (see TACAN template). Both ends of a runway use different letters: e.g. runway 07 = E, runway 25 = W.

© FOX 3

RUNWAY ORIENTATION

N

RWY N - NORTH

Runway heading 316° - 045°

runway 32, 33, 34, 35, 36, 01, 02, 03, 04

The following charts are for runway N (north):

SID N - STAR N - APP N

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	119.750	252.950	251.000	SQD 111X


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL



NOVEMBER 2D, ECHO 2D, SIERRA 2D, WHISKY 2D DEPARTURES

(RWY N)

SPEED: MAX 250 KT BELOW 10000' AGL

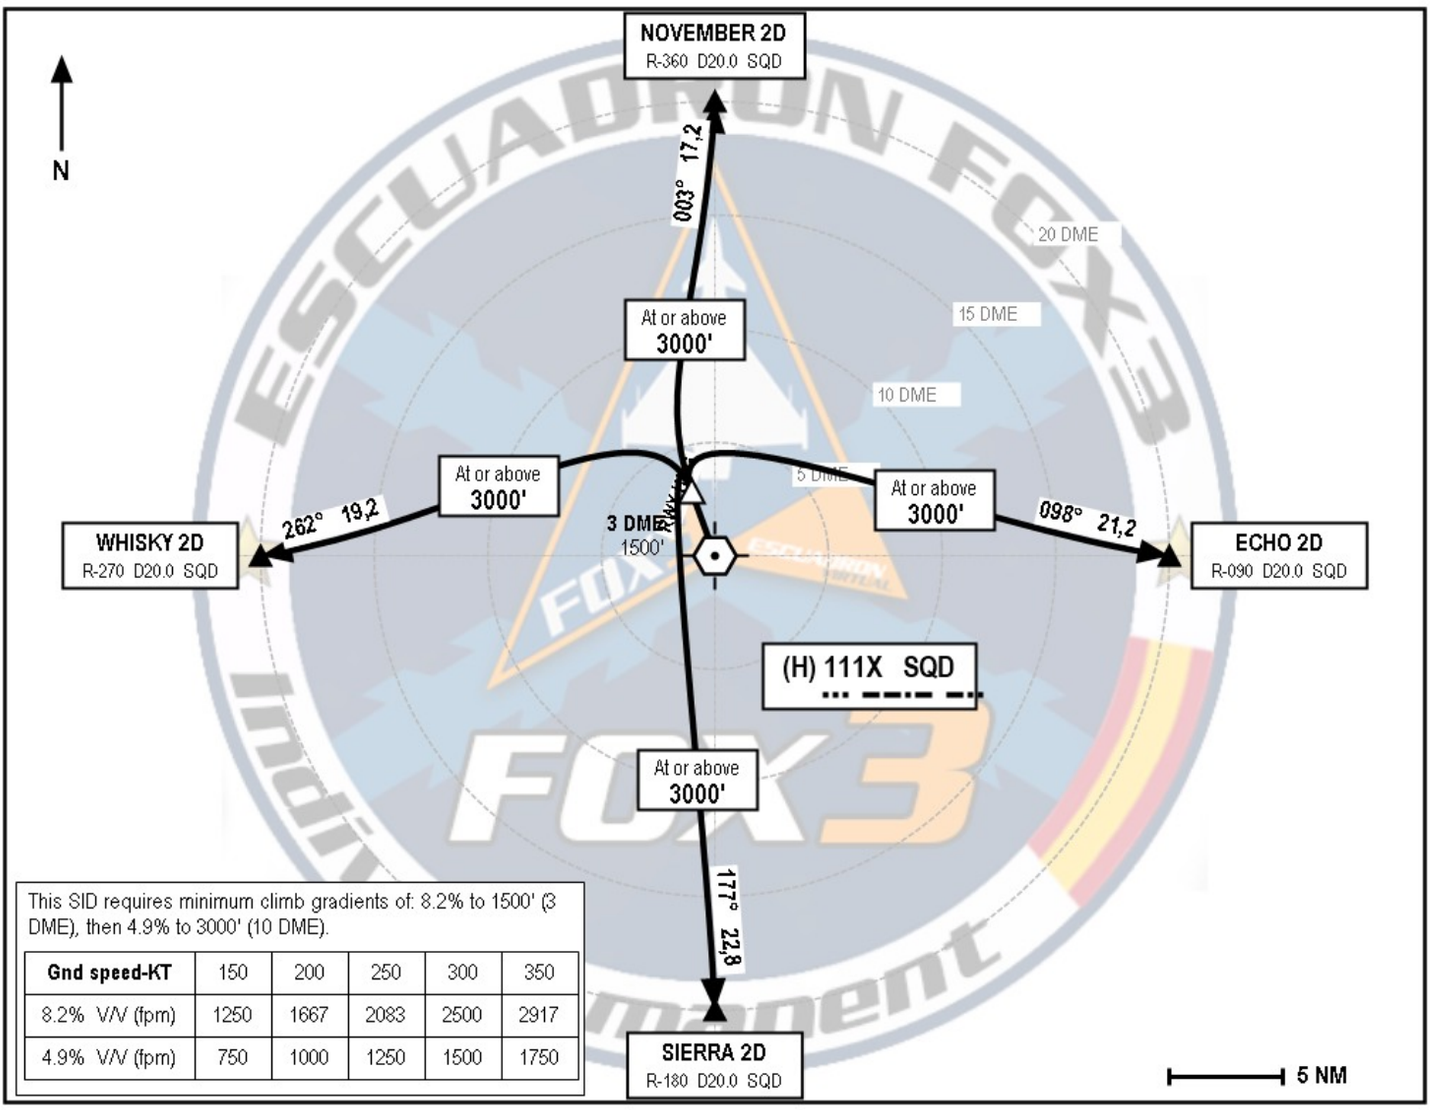

This SID requires minimum climb gradients of: 8.2% to 1500' (3 DME), then 4.9% to 3000' (10 DME).

Gnd speed-KT	150	200	250	300	350
8.2% V/V (fpm)	1250	1667	2083	2500	2917
4.9% V/V (fpm)	750	1000	1250	1500	1750

INITIAL CLIMB

Climb on runway heading to 3 DME / 1500', then continue on the assigned SID. Min climb gradient 8.2% to 1500', then 4.9% to 3000' by 10 DME. Two aircraft: 30 s between takeoffs, same point.

ROUTING

NOVEMBER 2D	Climb on runway heading to 3 DME / 1500', then direct NOVEMBER (R-360 / D20.0 SQD), track 003°. Cross 10 DME at or above 3000'. Continue as assigned.
ECHO 2D	Climb on runway heading to 3 DME / 1500', then direct ECHO (R-090 / D20.0 SQD), track 098°. Cross 10 DME at or above 3000'. Continue as assigned.
SIERRA 2D	Climb on runway heading to 3 DME / 1500', then direct SIERRA (R-180 / D20.0 SQD), track 177°. Cross 10 DME at or above 3000'. Continue as assigned.
WHISKY 2D	Climb on runway heading to 3 DME / 1500', then direct WHISKY (R-270 / D20.0 SQD), track 262°. Cross 10 DME at or above 3000'. Continue as assigned.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	119.750	252.950	251.000	SQD 111X


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL



NOVEMBER 1A, ECHO 1A, SIERRA 1A, WHISKY 1A ARRIVALS

(RWY N)

SPEED: MAX 250 KT BELOW 10000' AGL

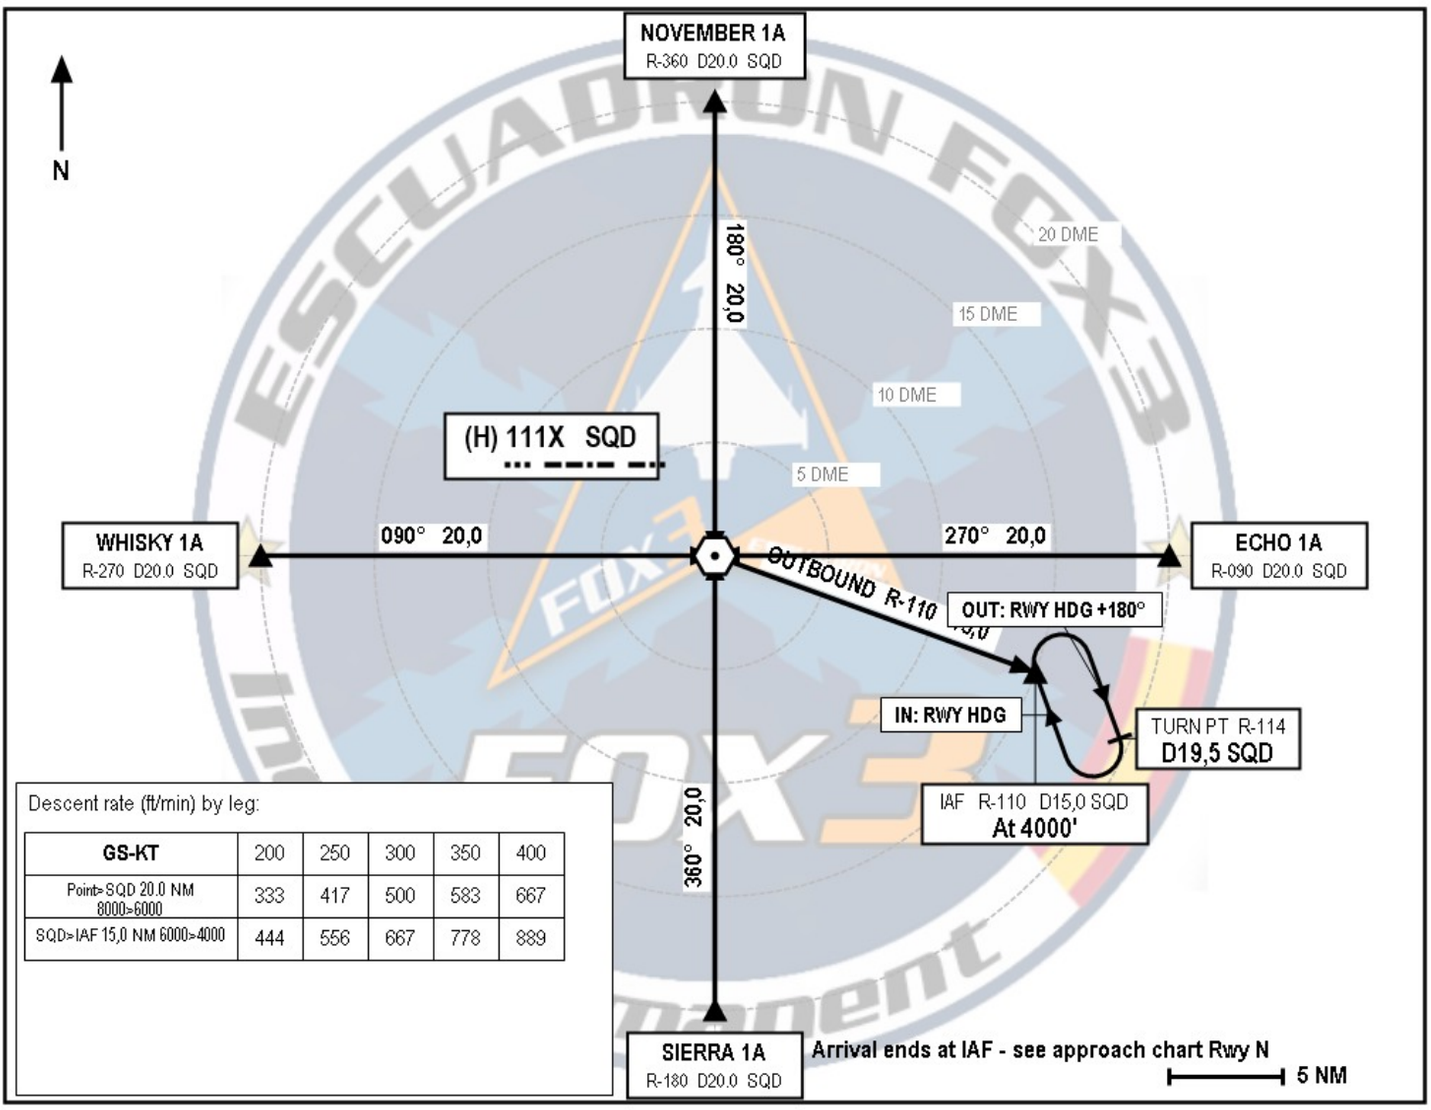

Descent rate (ft/min) by leg:

GS-KT	200	250	300	350	400
Point>SQD 20.0 NM 8000>6000	333	417	500	583	667
SQD>IAF 15,0 NM 6000>4000	444	556	667	778	889

ARRIVAL DESCRIPTION

RWY N	All arrivals route via the SQD TACAN (overhead), then OUTBOUND on R-110 to the IAF, D15,0 SQD (start of the DME arc approach RWY N), at 4000' / 250 kt. Fully IFR: no dead reckoning. Max 250 KT below 10000' AGL. Hold at the IAF (right turns, inbound RWY HDG, TP D19,5 SQD) if traffic. Arrival ends at the IAF.

ROUTING

NOVEMBER 1A	From NOVEMBER (R-360 / D20.0 SQD) at 8000', direct SQD (overhead, track 180°, 20.0 NM, 6000'), then outbound R-110 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
ECHO 1A	From ECHO (R-090 / D20.0 SQD) at 8000', direct SQD (overhead, track 270°, 20.0 NM, 6000'), then outbound R-110 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
SIERRA 1A	From SIERRA (R-180 / D20.0 SQD) at 8000', direct SQD (overhead, track 360°, 20.0 NM, 6000'), then outbound R-110 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
WHISKY 1A	From WHISKY (R-270 / D20.0 SQD) at 8000', direct SQD (overhead, track 090°, 20.0 NM, 6000'), then outbound R-110 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	119.750	252.950	251.000	SQD 111X


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL




TACAN DME ARC APPROACH

(RWY N)

SPEED: MAX 250 KT ARC - MAX 160 KT FINAL

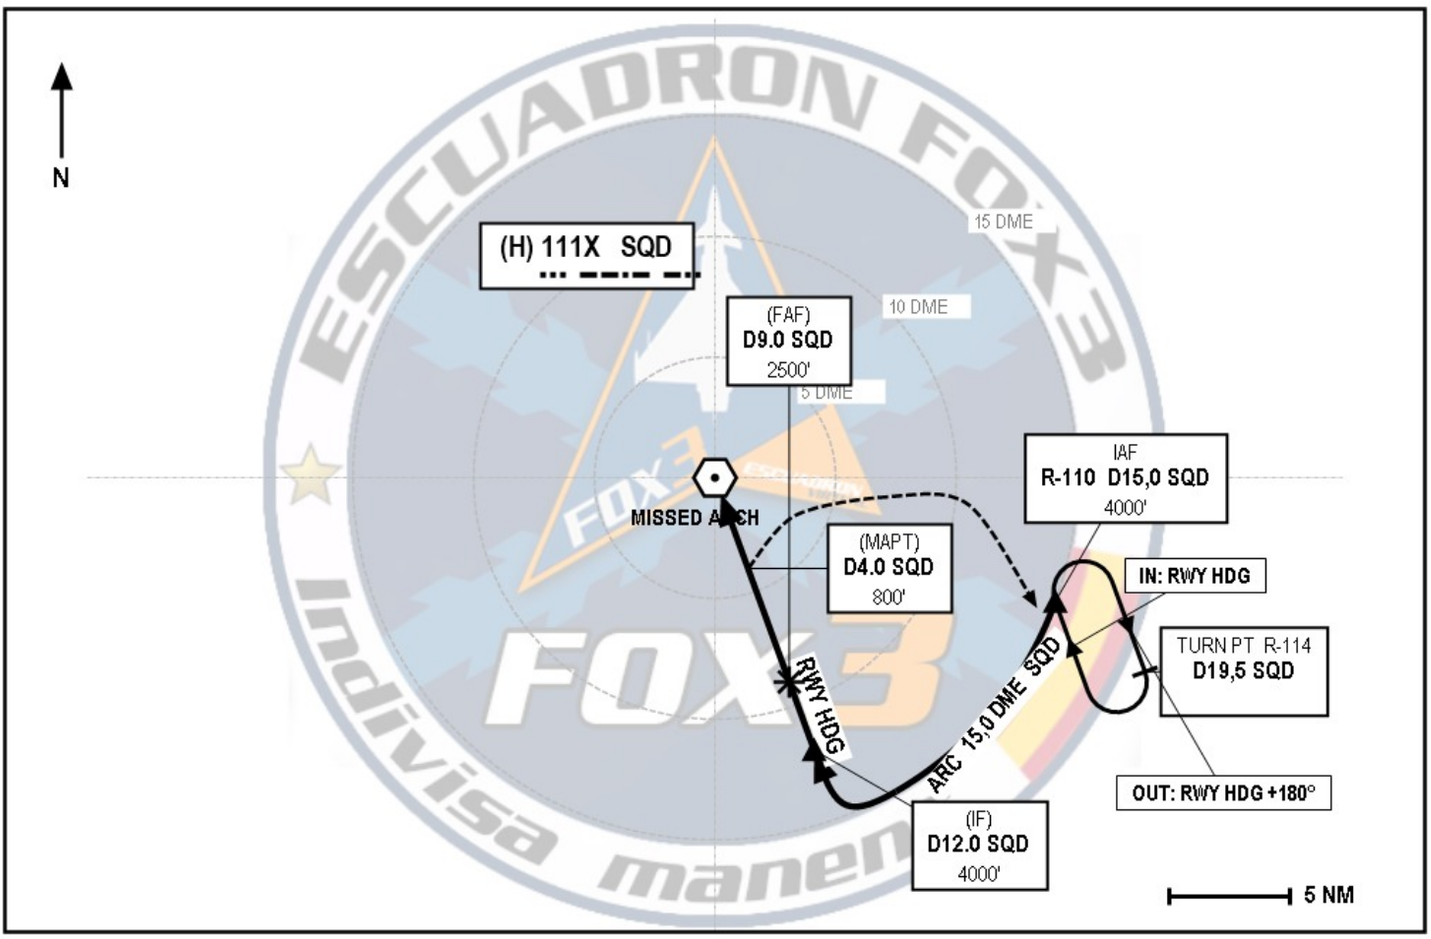

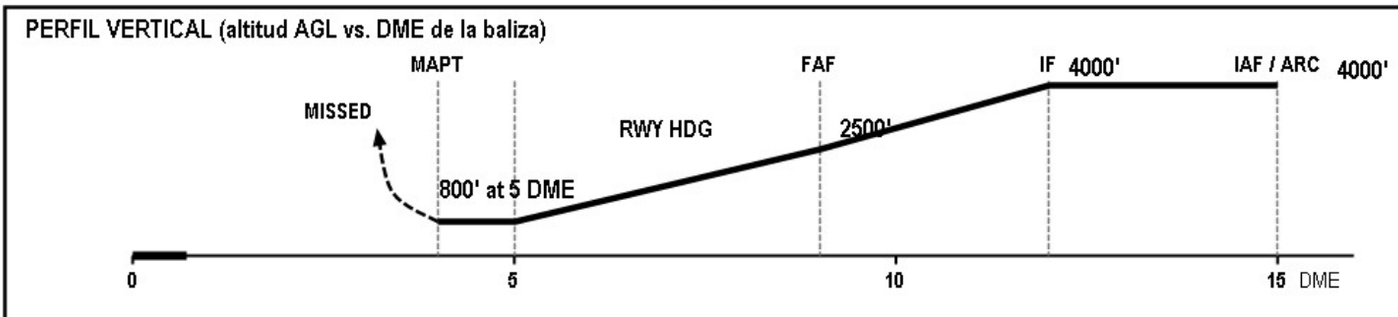

Gnd speed-KT	80	100	120	140	160	180
FAF-MAPT 5 NM (min:s)	3:45	3:00	2:30	2:09	1:52	1:40
ROD 7.0% (ft/min)	567	708	850	992	1133	1275

ALT/HGT DME (SQD) - ft AGL									
13	**12**	**11**	**10**	**9**	**8**	**7**	**6**	**5**	**4**
4000	4000	3500	3000	2500	2075	1650	1225	800	800

MISSED APCH: At the MAPT (D4.0 SQD, 800') turn right, climb and go direct IAF (D15.0 SQD, R-110) climbing to 4000' and hold (right turns, inbound RWY HDG, turn point D19,5 SQD).

NOTES: 1. TACAN SQD 111X required. 2. IAF D15.0 on R-110: fly the 15 DME arc clockwise; leave the arc 10° of radial before R-160 and turn right to intercept RWY HDG inbound; IF D12.0. 3. Two aircraft: 30 s between.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

RUNWAY ORIENTATION

S

RWY S - SOUTH

Runway heading 136° - 225°

runway 14, 15, 16, 17, 18, 19, 20, 21, 22

The following charts are for runway S (south):

SID S - STAR S - APP S

© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	119.750	252.950	251.000	SQD 111X


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL



NOVEMBER 2D, ECHO 2D, SIERRA 2D, WHISKY 2D DEPARTURES

(RWY S)

SPEED: MAX 250 KT BELOW 10000' AGL

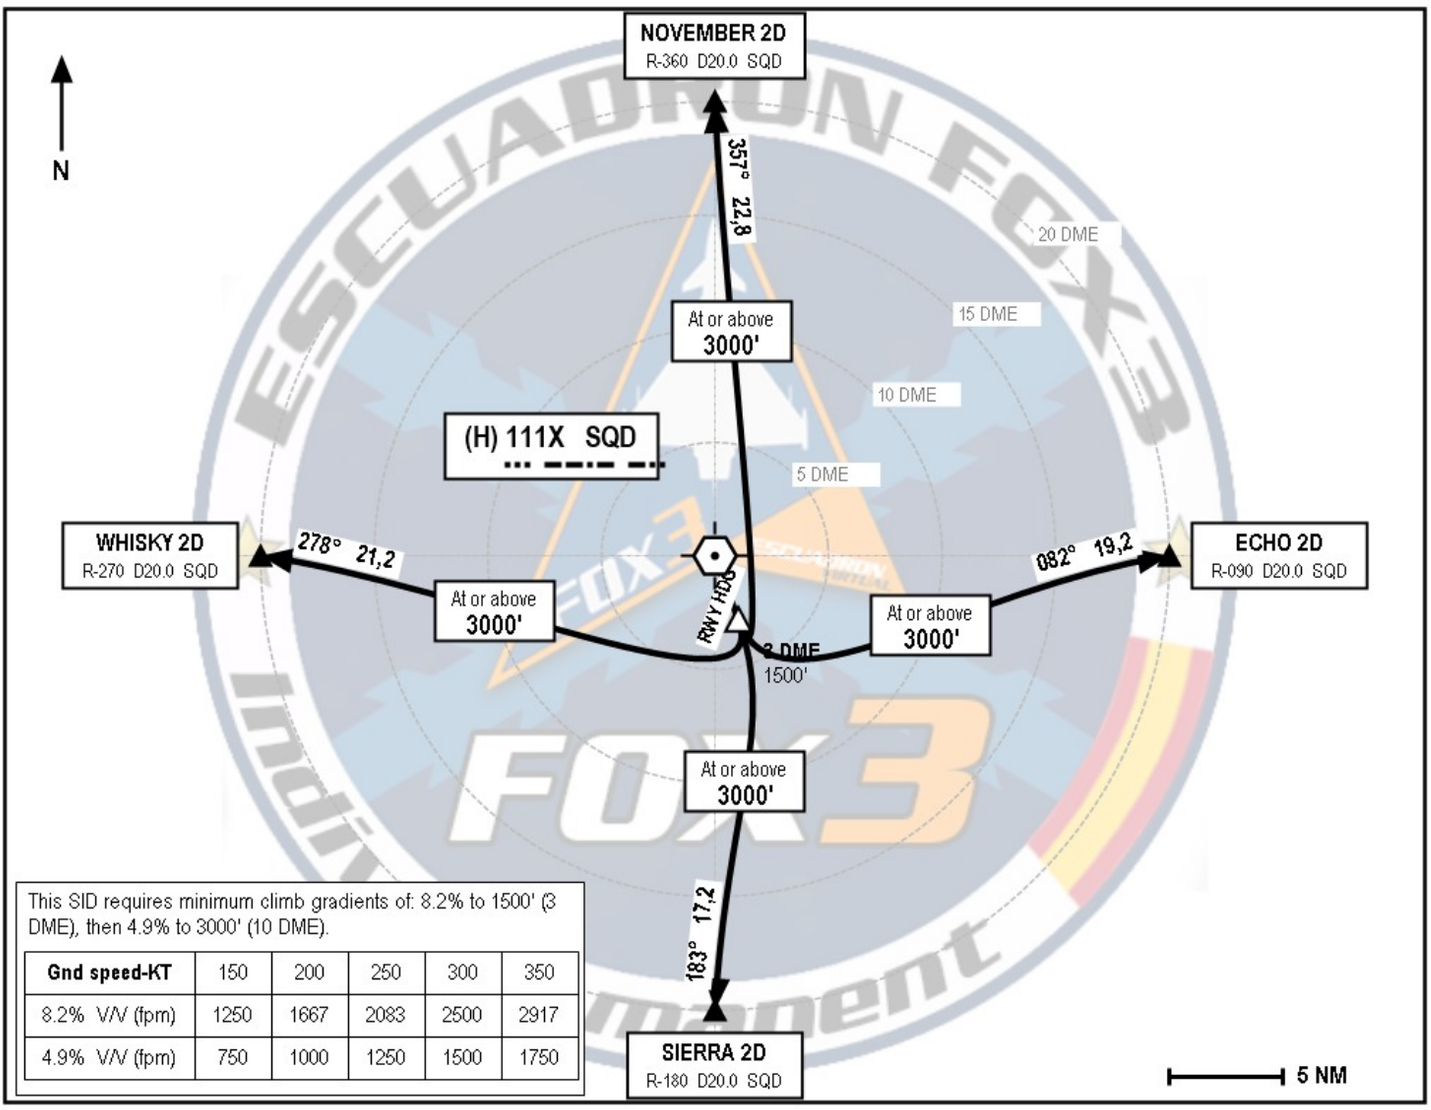

This SID requires minimum climb gradients of: 8.2% to 1500' (3 DME), then 4.9% to 3000' (10 DME).

Gnd speed-KT	150	200	250	300	350
8.2% V/V (fpm)	1250	1667	2083	2500	2917
4.9% V/V (fpm)	750	1000	1250	1500	1750

INITIAL CLIMB

Climb on runway heading to 3 DME / 1500', then continue on the assigned SID. Min climb gradient 8.2% to 1500', then 4.9% to 3000' by 10 DME. Two aircraft: 30 s between takeoffs, same point.

ROUTING

NOVEMBER 2D	Climb on runway heading to 3 DME / 1500', then direct NOVEMBER (R-360 / D20.0 SQD), track 357°. Cross 10 DME at or above 3000'. Continue as assigned.
ECHO 2D	Climb on runway heading to 3 DME / 1500', then direct ECHO (R-090 / D20.0 SQD), track 082°. Cross 10 DME at or above 3000'. Continue as assigned.
SIERRA 2D	Climb on runway heading to 3 DME / 1500', then direct SIERRA (R-180 / D20.0 SQD), track 183°. Cross 10 DME at or above 3000'. Continue as assigned.
WHISKY 2D	Climb on runway heading to 3 DME / 1500', then direct WHISKY (R-270 / D20.0 SQD), track 278°. Cross 10 DME at or above 3000'. Continue as assigned.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	119.750	252.950	251.000	SQD 111X


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL



NOVEMBER 1A, ECHO 1A, SIERRA 1A, WHISKY 1A ARRIVALS

(RWY S)

SPEED: MAX 250 KT BELOW 10000' AGL

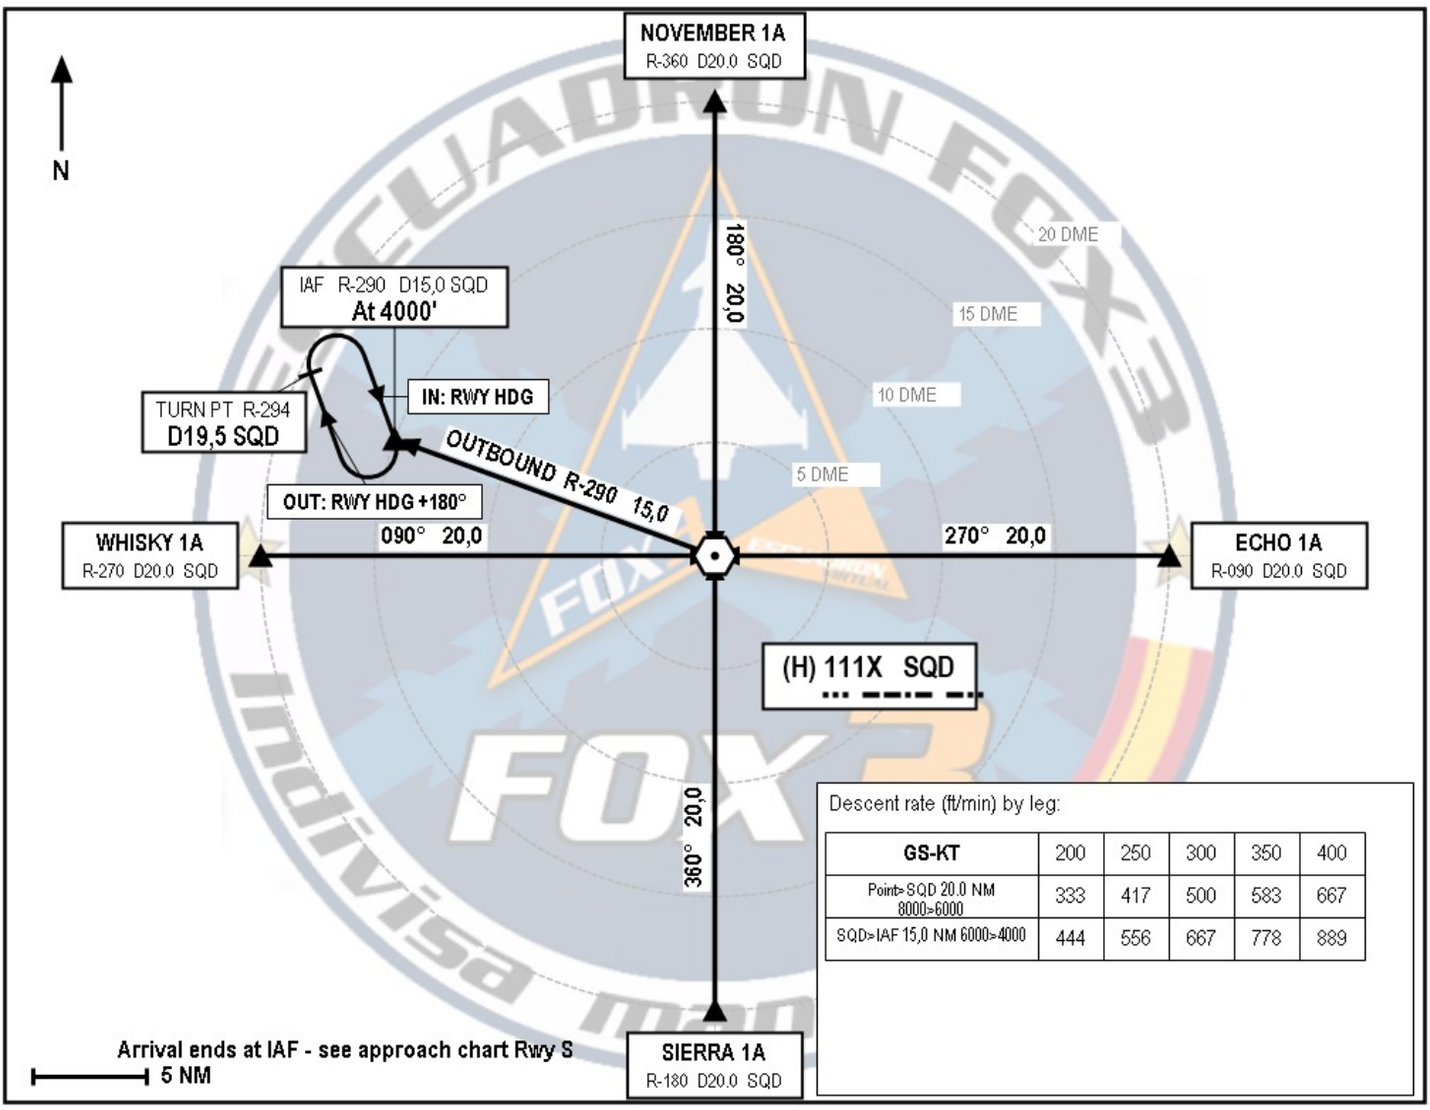

ARRIVAL DESCRIPTION

RWY S	All arrivals route via the SQD TACAN (overhead), then OUTBOUND on R-290 to the IAF, D15,0 SQD (start of the DME arc approach RWY S), at 4000' / 250 kt. Fully IFR: no dead reckoning. Max 250 KT below 10000' AGL. Hold at the IAF (right turns, inbound RWY HDG, TP D19,5 SQD) if traffic. Arrival ends at the IAF.

ROUTING

NOVEMBER 1A	From NOVEMBER (R-360 / D20.0 SQD) at 8000', direct SQD (overhead, track 180°, 20.0 NM, 6000'), then outbound R-290 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
ECHO 1A	From ECHO (R-090 / D20.0 SQD) at 8000', direct SQD (overhead, track 270°, 20.0 NM, 6000'), then outbound R-290 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
SIERRA 1A	From SIERRA (R-180 / D20.0 SQD) at 8000', direct SQD (overhead, track 360°, 20.0 NM, 6000'), then outbound R-290 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
WHISKY 1A	From WHISKY (R-270 / D20.0 SQD) at 8000', direct SQD (overhead, track 090°, 20.0 NM, 6000'), then outbound R-290 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	119.750	252.950	251.000	SQD 111X


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL




TACAN DME ARC APPROACH

(RWY S)

SPEED: MAX 250 KT ARC - MAX 160 KT FINAL

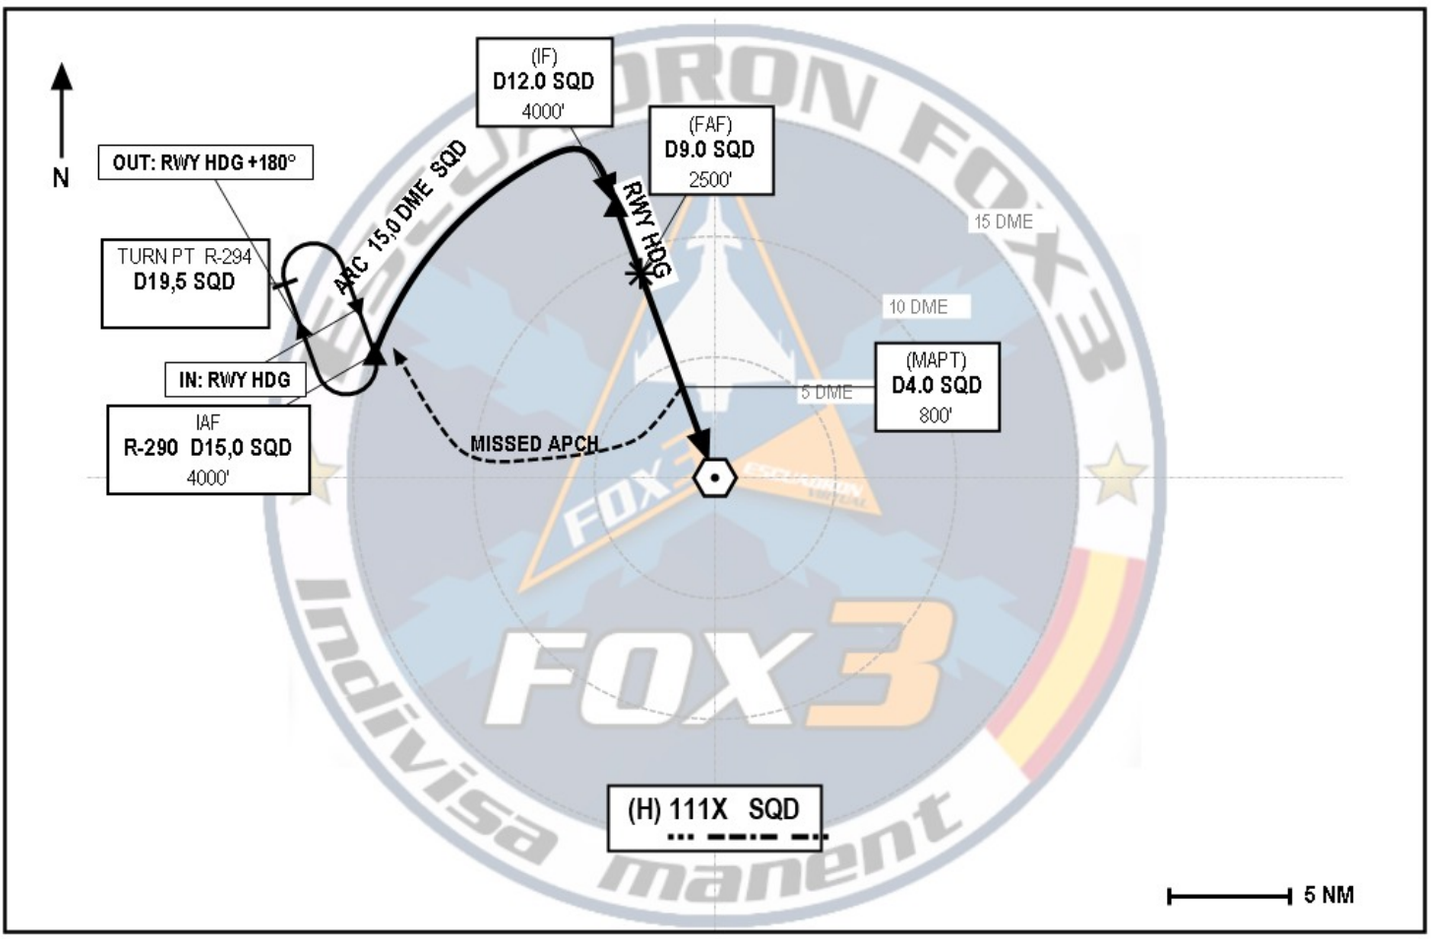

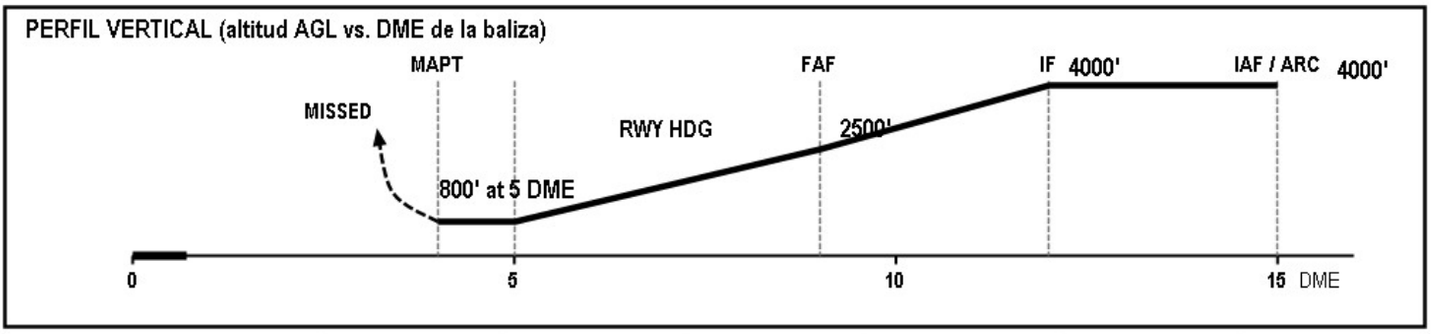

Gnd speed-KT	80	100	120	140	160	180
FAF-MAPT 5 NM (min:s)	3:45	3:00	2:30	2:09	1:52	1:40
ROD 7.0% (ft/min)	567	708	850	992	1133	1275

ALT/HGT DME (SQD) - ft AGL									
13	**12**	**11**	**10**	**9**	**8**	**7**	**6**	**5**	**4**
4000	4000	3500	3000	2500	2075	1650	1225	800	800

MISSED APCH: At the MAPT (D4.0 SQD, 800') turn right, climb and go direct IAF (D15.0 SQD, R-290) climbing to 4000' and hold (right turns, inbound RWY HDG, turn point D19,5 SQD).

NOTES: 1. TACAN SQD 111X required. 2. IAF D15.0 on R-290: fly the 15 DME arc clockwise; leave the arc 10° of radial before R-340 and turn right to intercept RWY HDG inbound; IF D12.0. 3. Two aircraft: 30 s between.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

RUNWAY ORIENTATION

E

RWY E - EAST

Runway heading 046° - 135°

runway 05, 06, 07, 08, 09, 10, 11, 12, 13

The following charts are for runway E (east):

SID E - STAR E - APP E

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	119.750	252.950	251.000	SQD 111X


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL



NOVEMBER 2D, ECHO 2D, SIERRA 2D, WHISKY 2D DEPARTURES

(RWY E)

SPEED: MAX 250 KT BELOW 10000' AGL

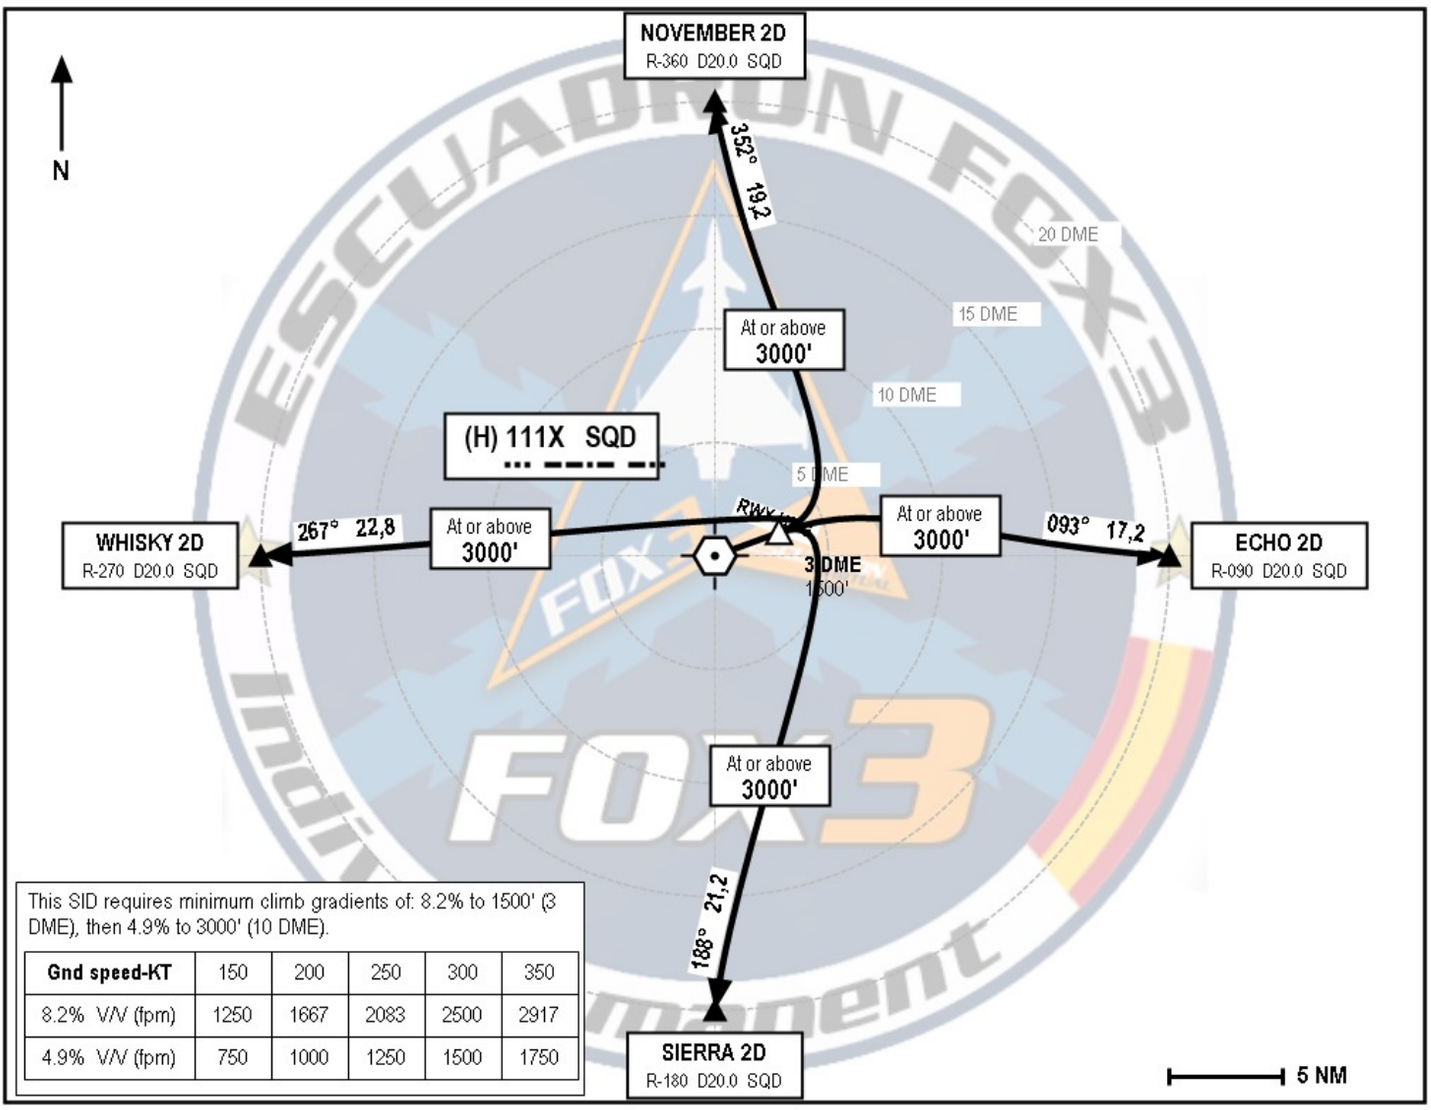

This SID requires minimum climb gradients of: 8.2% to 1500' (3 DME), then 4.9% to 3000' (10 DME).

Gnd speed-KT	150	200	250	300	350
8.2% V/V (fpm)	1250	1667	2083	2500	2917
4.9% V/V (fpm)	750	1000	1250	1500	1750

INITIAL CLIMB

Climb on runway heading to 3 DME / 1500', then continue on the assigned SID. Min climb gradient 8.2% to 1500', then 4.9% to 3000' by 10 DME. Two aircraft: 30 s between takeoffs, same point.

ROUTING

NOVEMBER 2D	Climb on runway heading to 3 DME / 1500', then direct NOVEMBER (R-360 / D20.0 SQD), track 352°. Cross 10 DME at or above 3000'. Continue as assigned.
ECHO 2D	Climb on runway heading to 3 DME / 1500', then direct ECHO (R-090 / D20.0 SQD), track 093°. Cross 10 DME at or above 3000'. Continue as assigned.
SIERRA 2D	Climb on runway heading to 3 DME / 1500', then direct SIERRA (R-180 / D20.0 SQD), track 188°. Cross 10 DME at or above 3000'. Continue as assigned.
WHISKY 2D	Climb on runway heading to 3 DME / 1500', then direct WHISKY (R-270 / D20.0 SQD), track 267°. Cross 10 DME at or above 3000'. Continue as assigned.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	119.750	252.950	251.000	SQD 111X


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL



NOVEMBER 1A, ECHO 1A, SIERRA 1A, WHISKY 1A ARRIVALS

(RWY E)

SPEED: MAX 250 KT BELOW 10000' AGL

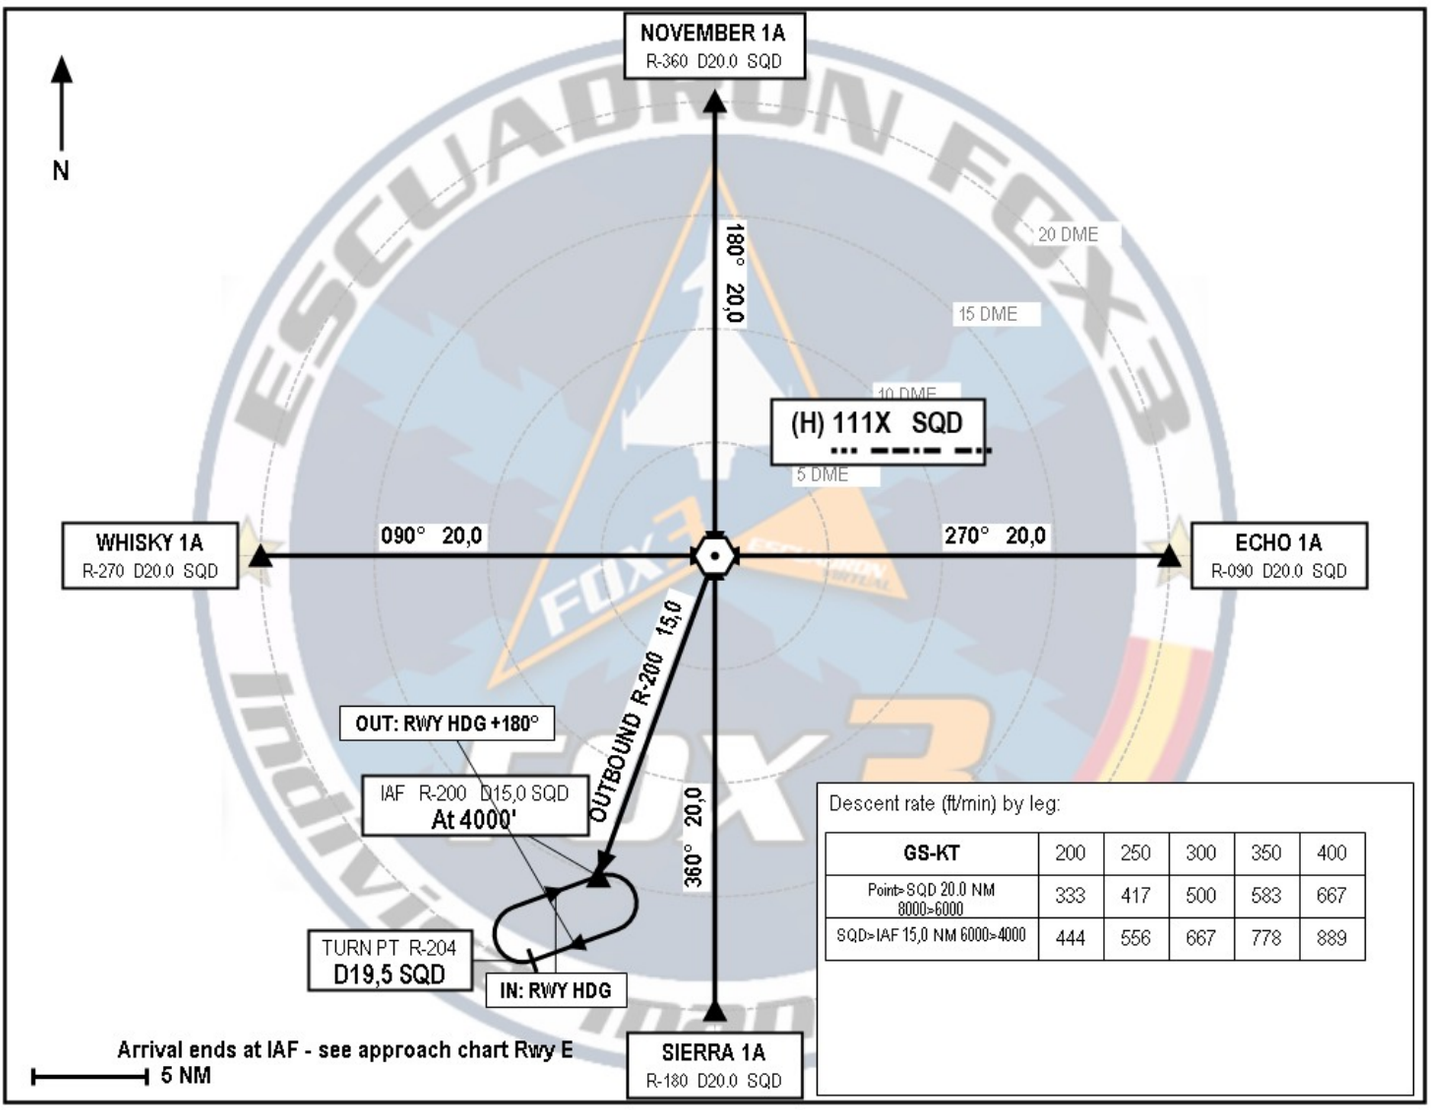

Descent rate (ft/min) by leg:

GS-KT	200	250	300	350	400
Point> SQD 20.0 NM 8000>6000	333	417	500	583	667
SQD>IAF 15,0 NM 6000>4000	444	556	667	778	889

ARRIVAL DESCRIPTION

RWY E	All arrivals route via the SQD TACAN (overhead), then OUTBOUND on R-200 to the IAF, D15,0 SQD (start of the DME arc approach RWY E), at 4000' / 250 kt. Fully IFR: no dead reckoning. Max 250 KT below 10000' AGL. Hold at the IAF (right turns, inbound RWY HDG, TP D19,5 SQD) if traffic. Arrival ends at the IAF.

ROUTING

NOVEMBER 1A	From NOVEMBER (R-360 / D20.0 SQD) at 8000', direct SQD (overhead, track 180°, 20.0 NM, 6000'), then outbound R-200 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
ECHO 1A	From ECHO (R-090 / D20.0 SQD) at 8000', direct SQD (overhead, track 270°, 20.0 NM, 6000'), then outbound R-200 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
SIERRA 1A	From SIERRA (R-180 / D20.0 SQD) at 8000', direct SQD (overhead, track 360°, 20.0 NM, 6000'), then outbound R-200 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
WHISKY 1A	From WHISKY (R-270 / D20.0 SQD) at 8000', direct SQD (overhead, track 090°, 20.0 NM, 6000'), then outbound R-200 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	119.750	252.950	251.000	SQD 111X


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL




TACAN DME ARC APPROACH

(RWY E)

SPEED: MAX 250 KT ARC - MAX 160 KT FINAL

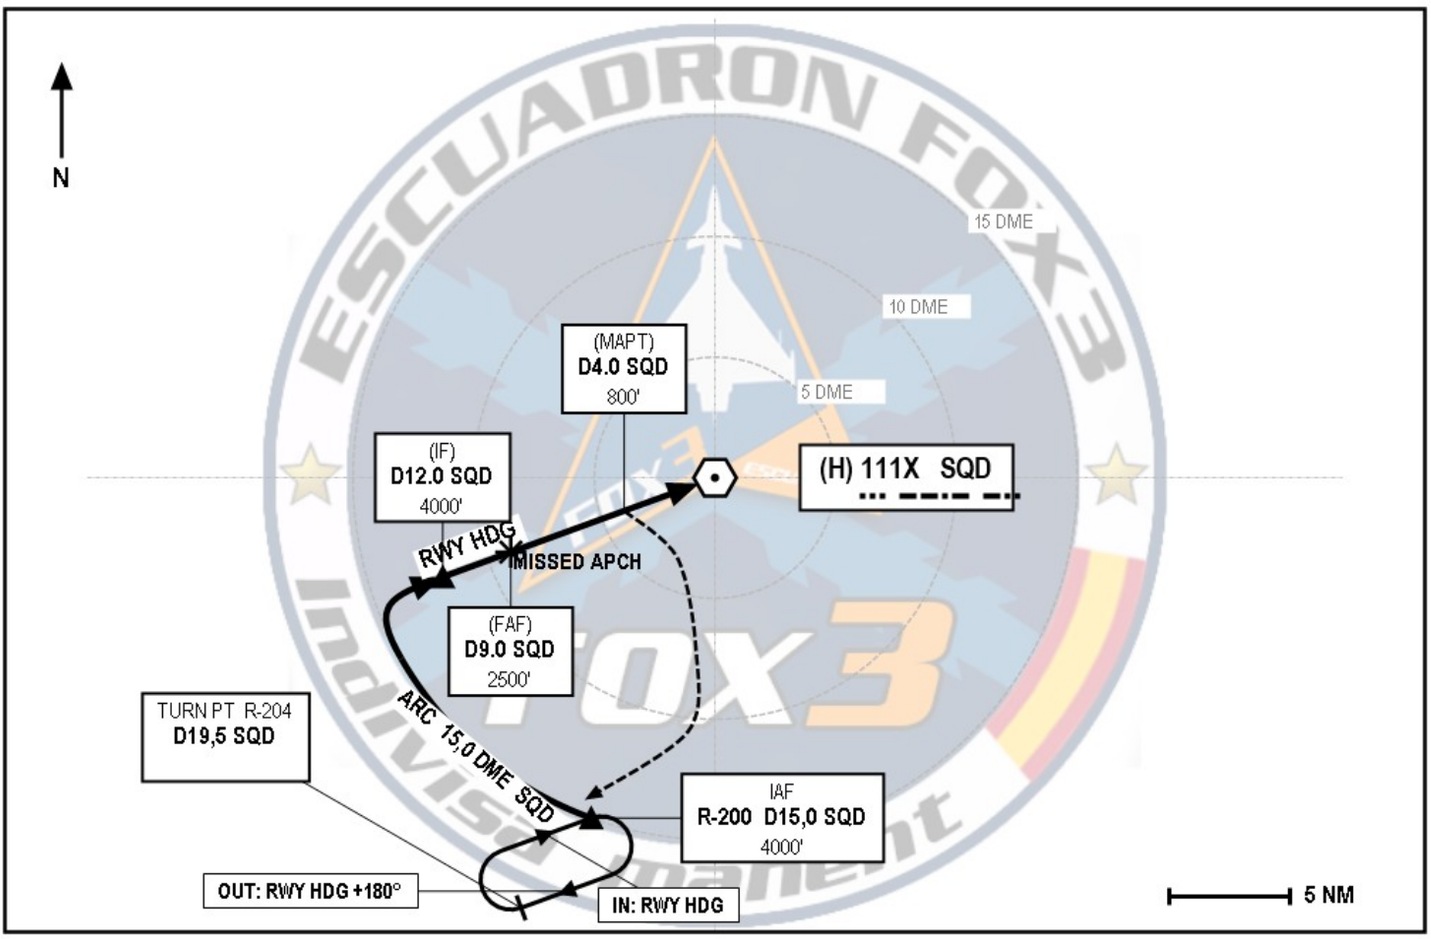

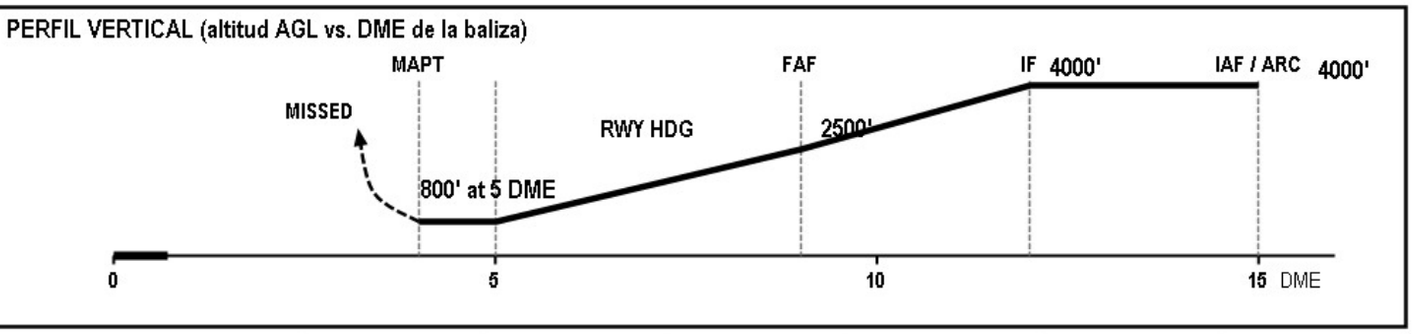

Gnd speed-KT	80	100	120	140	160	180
FAF-MAPT 5 NM (min:s)	3:45	3:00	2:30	2:09	1:52	1:40
ROD 7.0% (ft/min)	567	708	850	992	1133	1275

ALT/HGT DME (SQD) - ft AGL									
13	**12**	**11**	**10**	**9**	**8**	**7**	**6**	**5**	**4**
4000	4000	3500	3000	2500	2075	1650	1225	800	800

MISSED APCH: At the MAPT (D4.0 SQD, 800') turn right, climb and go direct IAF (D15.0 SQD, R-200) climbing to 4000' and hold (right turns, inbound RWY HDG, turn point D19,5 SQD).

NOTES: 1. TACAN SQD 111X required. 2. IAF D15.0 on R-200: fly the 15 DME arc clockwise; leave the arc 10° of radial before R-250 and turn right to intercept RWY HDG inbound; IF D12.0. 3. Two aircraft: 30 s between.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

RUNWAY ORIENTATION

W

RWY W - WEST

Runway heading 226° - 315°

runway 23, 24, 25, 26, 27, 28, 29, 30, 31

The following charts are for runway W (west):

SID W - STAR W - APP W

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	119.750	252.950	251.000	SQD 111X


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL



NOVEMBER 2D, ECHO 2D, SIERRA 2D, WHISKY 2D DEPARTURES

(RWY W)

SPEED: MAX 250 KT BELOW 10000' AGL

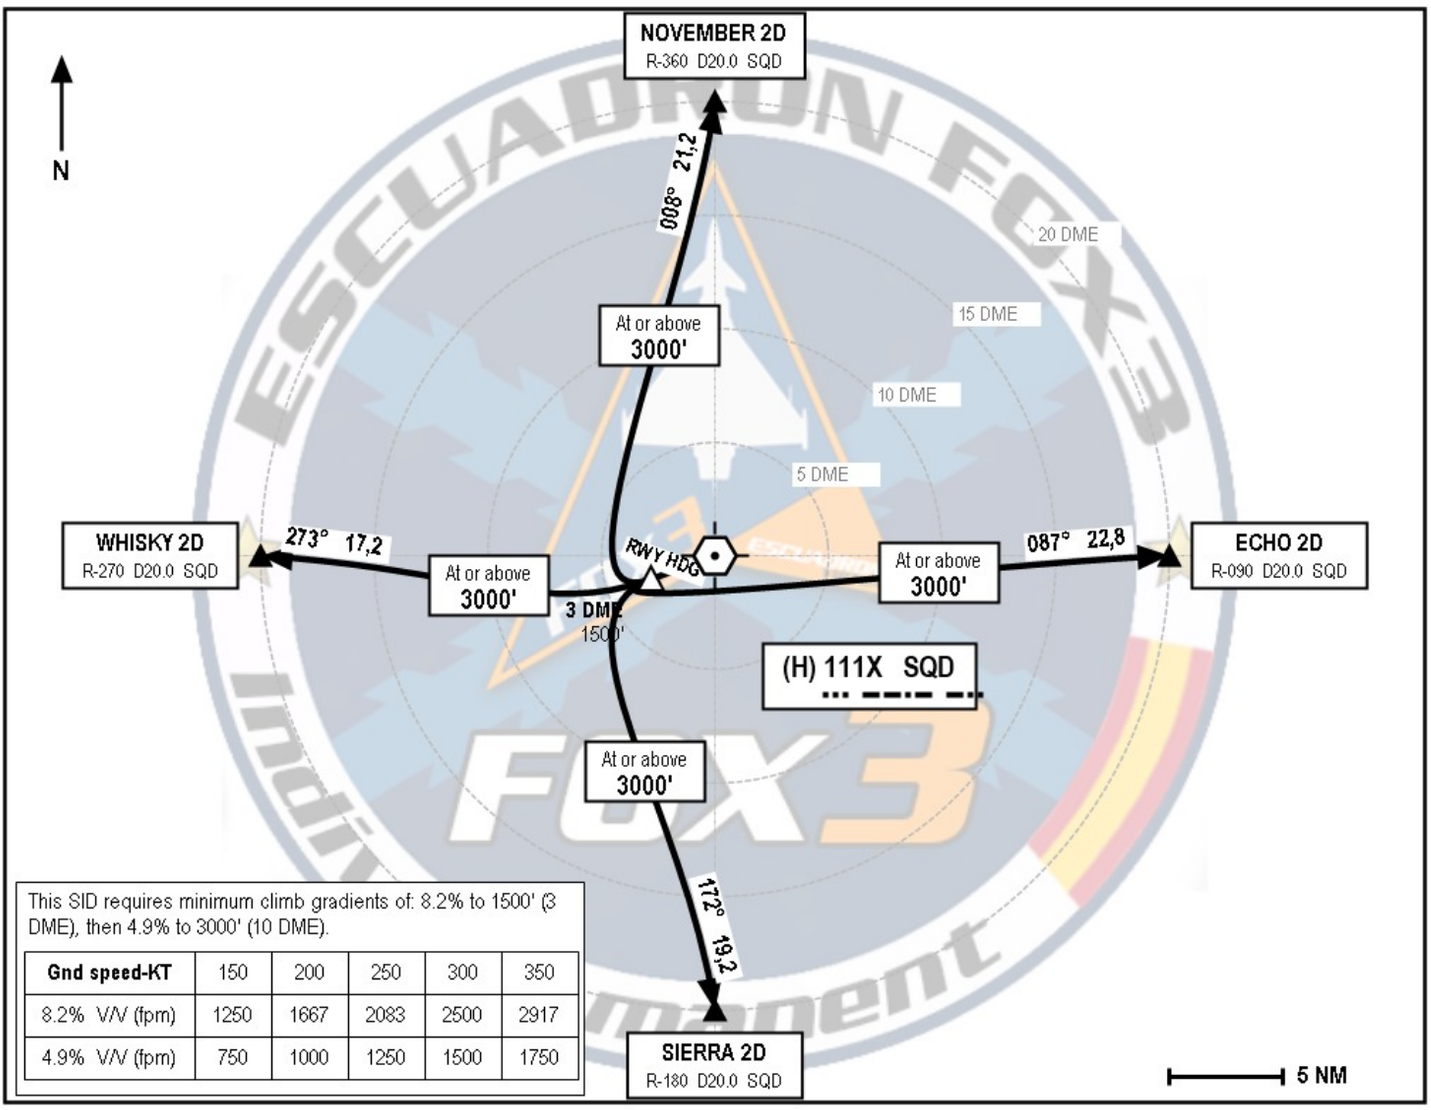

This SID requires minimum climb gradients of: 8.2% to 1500' (3 DME), then 4.9% to 3000' (10 DME).

Gnd speed-KT	150	200	250	300	350
8.2% V/V (fpm)	1250	1667	2083	2500	2917
4.9% V/V (fpm)	750	1000	1250	1500	1750

INITIAL CLIMB

Climb on runway heading to 3 DME / 1500', then continue on the assigned SID. Min climb gradient 8.2% to 1500', then 4.9% to 3000' by 10 DME. Two aircraft: 30 s between takeoffs, same point.

ROUTING

NOVEMBER 2D	Climb on runway heading to 3 DME / 1500', then direct NOVEMBER (R-360 / D20.0 SQD), track 008°. Cross 10 DME at or above 3000'. Continue as assigned.
ECHO 2D	Climb on runway heading to 3 DME / 1500', then direct ECHO (R-090 / D20.0 SQD), track 087°. Cross 10 DME at or above 3000'. Continue as assigned.
SIERRA 2D	Climb on runway heading to 3 DME / 1500', then direct SIERRA (R-180 / D20.0 SQD), track 172°. Cross 10 DME at or above 3000'. Continue as assigned.
WHISKY 2D	Climb on runway heading to 3 DME / 1500', then direct WHISKY (R-270 / D20.0 SQD), track 273°. Cross 10 DME at or above 3000'. Continue as assigned.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.
© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	119.750	252.950	251.000	SQD 111X


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL



NOVEMBER 1A, ECHO 1A, SIERRA 1A, WHISKY 1A ARRIVALS

(RWY W)

SPEED: MAX 250 KT BELOW 10000' AGL

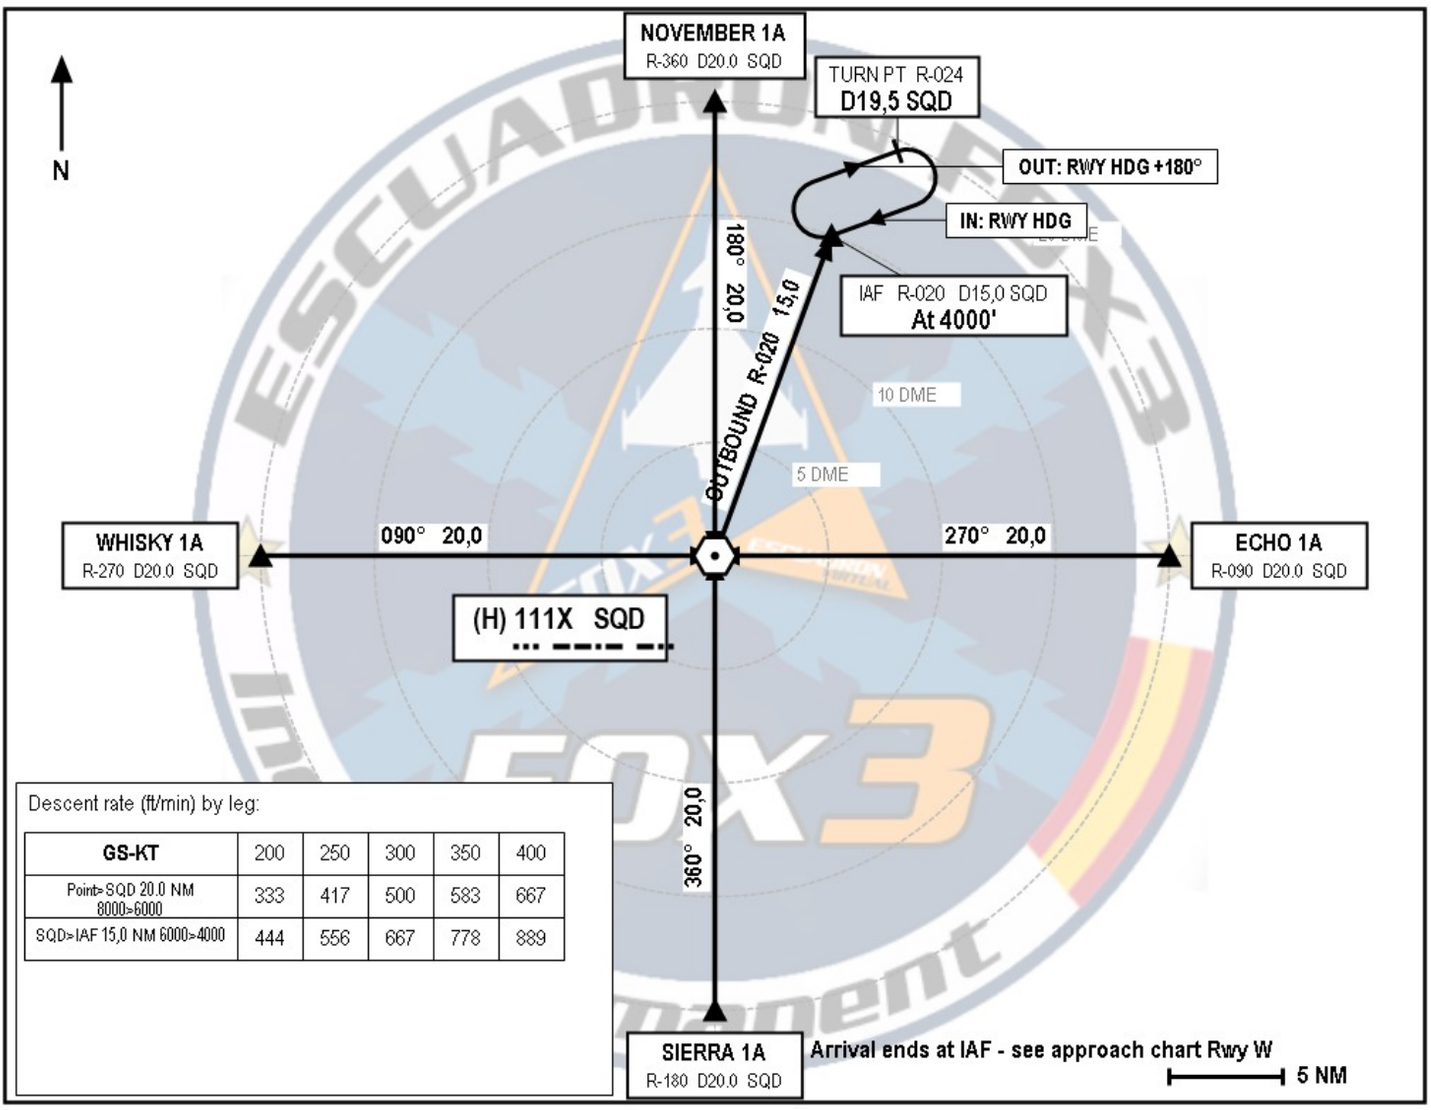

Descent rate (ft/min) by leg:

GS-KT	200	250	300	350	400
Point>SQD 20.0 NM 8000>6000	333	417	500	583	667
SQD>IAF 15,0 NM 6000>4000	444	556	667	778	889

ARRIVAL DESCRIPTION

RWY W	All arrivals route via the SQD TACAN (overhead), then OUTBOUND on R-020 to the IAF, D15,0 SQD (start of the DME arc approach RWY W), at 4000' / 250 kt. Fully IFR: no dead reckoning. Max 250 KT below 10000' AGL. Hold at the IAF (right turns, inbound RWY HDG, TP D19,5 SQD) if traffic. Arrival ends at the IAF.

ROUTING

NOVEMBER 1A	From NOVEMBER (R-360 / D20.0 SQD) at 8000', direct SQD (overhead, track 180°, 20.0 NM, 6000'), then outbound R-020 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
ECHO 1A	From ECHO (R-090 / D20.0 SQD) at 8000', direct SQD (overhead, track 270°, 20.0 NM, 6000'), then outbound R-020 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
SIERRA 1A	From SIERRA (R-180 / D20.0 SQD) at 8000', direct SQD (overhead, track 360°, 20.0 NM, 6000'), then outbound R-020 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.
WHISKY 1A	From WHISKY (R-270 / D20.0 SQD) at 8000', direct SQD (overhead, track 090°, 20.0 NM, 6000'), then outbound R-020 to IAF (D15,0 SQD), 4000'. Hold right turns, inbound RWY HDG, TP D19,5 SQD, or continue with approach chart.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3

Apt Elev	TWR VHF	TWR UHF	AWACS Overlord	TACAN
---	**119.750**	**252.950**	**251.000**	**SQD 111X**


Trans level: By ATC Trans alt: 18000' Alt set: QNH Altitudes ft AGL




TACAN DME ARC APPROACH

(RWY W)

SPEED: MAX 250 KT ARC - MAX 160 KT FINAL

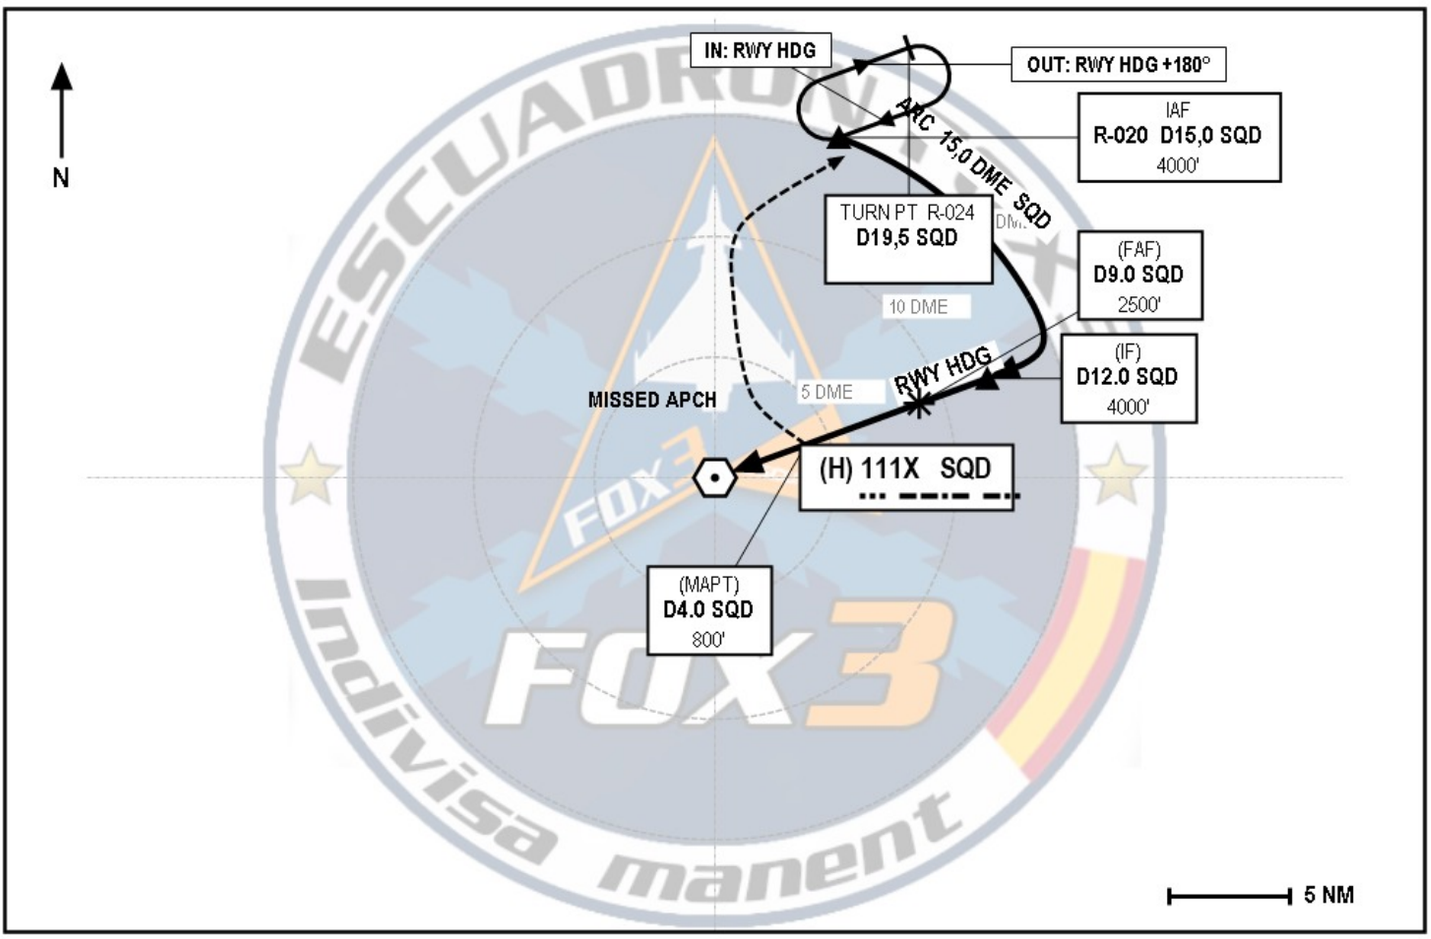

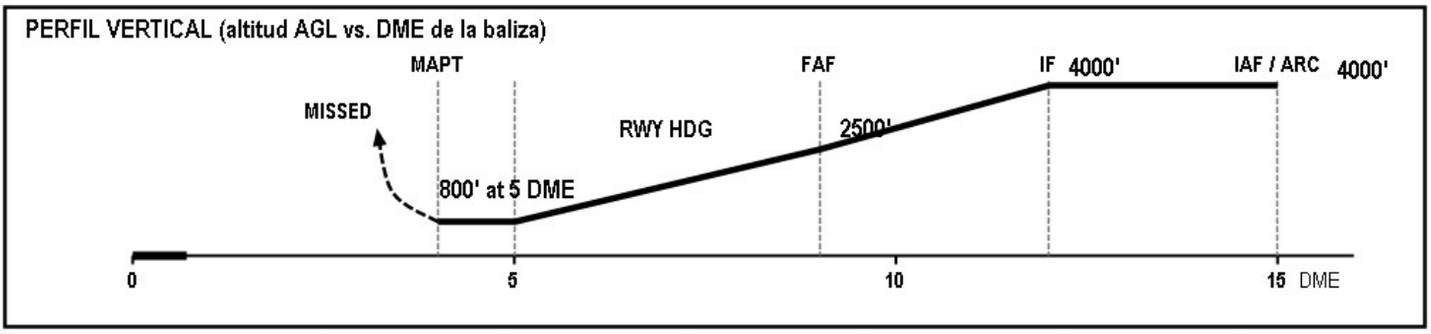

Gnd speed-KT	80	100	120	140	160	180
FAF-MAPT 5 NM (min:s)	3:45	3:00	2:30	2:09	1:52	1:40
ROD 7.0% (ft/min)	567	708	850	992	1133	1275

ALT/HGT DME (SQD) - ft AGL									
13	**12**	**11**	**10**	**9**	**8**	**7**	**6**	**5**	**4**
4000	4000	3500	3000	2500	2075	1650	1225	800	800

MISSED APCH: At the MAPT (D4.0 SQD, 800') turn right, climb and go direct IAF (D15.0 SQD, R-020) climbing to 4000' and hold (right turns, inbound RWY HDG, turn point D19,5 SQD).

NOTES: 1. TACAN SQD 111X required. 2. IAF D15.0 on R-020: fly the 15 DME arc clockwise; leave the arc 10° of radial before R-070 and turn right to intercept RWY HDG inbound; IF D12.0. 3. Two aircraft: 30 s between.

Plantilla estandar del escuadron. Solo para DCS - no usar para navegacion real.

© FOX 3