

The implementation of Bifrostconnect Front-end
scope, re-design and development with the
relevant back-end support develop.

Fei Gu

January 3, 2024

Abstract

Contents

1	Introduction	4
1.1	The project type	4
1.2	About the company	4
1.3	About the project	4
2	Problem Statement	5
2.1	Statement	5
2.2	Situation	5
2.3	Potential Solution	5
3	Requirement Analysis	7
3.1	Stakeholders	7
3.2	Bussines Domain	8
3.3	Scope	8
3.4	Goals	9
4	Software Design	10
4.1	Software Development Methods	10
4.1.1	Agile Software Development	10
4.1.2	Feature Driven Development	10
4.1.3	Develop an overall model	11
4.1.4	Feature list	11
4.2	Technology selection	11
4.2.1	Front-end	11
4.2.2	Back-end	12
4.2.3	Database	12
4.2.4	Data communication	13
4.2.5	DevOps	13
4.3	Architecture design	14
4.3.1	Front-end	14
4.3.2	Back-end	16
4.3.3	Data communication and storage	17
4.4	Domain model	19
4.5	DevOps CI/CD process design	19
4.5.1	Continuous Integration	19
4.5.2	Continuous Delivery	19
4.5.3	Continuous Deployment	19
5	Software Development	20
5.1	Front-end	20
5.2	Back-end	20
5.3	Database	20
5.4	WebRTC	20
5.5	MQTT	20

5.6	RESTful API	20
5.7	Authentication	20
6	Conclusion	21
6.1	Result	21
6.2	Discussion	21
6.3	Future Work	21

1 Introduction

1.1 The project type

This project marks the culmination of the EASV Computer Science program. Its primary objective is to showcase the breadth and depth of knowledge and skills that the student has amassed over two and a half years of rigorous study, and to apply these competencies in a practical setting.

In the scope of this project, the student will collaborate with a company to tackle a specific problem they are encountering. The student will leverage the knowledge and skills gleaned from their education to devise a solution.

This implies that the project will be directly relevant to the company's business domain, and will employ both software engineering and software development methodologies to identify, analyze, and ultimately resolve the problem.

1.2 About the company

in providing solutions for remote system access under stringent security conditions. The company's primary focus is on scenarios where the client's system lacks or is not permitted to have internet connectivity. Instead of relying on third-party services, BifrostConnect uses a relay device to facilitate remote access.

BifrostConnect, a startup founded in 2018, is a dedicated team of 10 to 12 professionals based in Copenhagen, Denmark.

Over the past five years, the company has developed a unique solution for remote system access. This solution is specifically designed for systems that operate under strict security conditions and are not permitted to have internet connectivity.

BifrostConnect's main offering is a hardware device coupled with a network application. This combination enables secure, remote access to client systems. In addition to this, the company provides related services and comprehensive solutions to cater to a wide range of client needs.

1.3 About the project

This project entails a thorough redesign and redevelopment of the existing front-end software, leveraging the foundation provided by the company's original software. Additionally, it involves enhancing the back-end to provide the necessary support for the new front-end.

2 Problem Statement

2.1 Statement

In the scope of this project, the integration of the Remote Access Interface and Tunnel Interface into the Device Manager Application is a primary objective. The goal is to create a single-page application that fully encapsulates the functionality of both the Remote Access and Tunnel Connection capabilities.

2.2 Situation

The existing BifrostConnect front-end application is divided into two distinct user interfaces: the Device Manager (DM) and the Remote Access Interface (RAI). This division requires users to manage their devices and users in one application, while operating their devices to use the Bifrost product in another web application. Moreover, the RAI is further split into two different user interfaces, known as the Classic RAI and Tunnel RAI. These interfaces direct users to different web applications depending on the type of access solution they wish to create.

This situation arose because the development of the Bifrost product was primarily focused on the device, with the application part not receiving as much attention. As a result, the application part was developed by different developers, each with their own design logic. This led to a lack of thorough planning for the application functionality during the development process. Consequently, the design logic of the product is not scalable, which has resulted in a diminished user experience and an exponential increase in code complexity, making it increasingly difficult to maintain and improve. Furthermore, the product design style lacks scalability due to a lack of modularity and code consistency, and the operation logic is unclear.

2.3 Potential Solution

To address those issue, there is a need to redesign and remake the front-end with a focus on implementing a modular unified front-end management system that encompasses all the necessary functionality.

The goal is to provide users with seamless control, monitoring, and access to their devices from anywhere, enhancing their overall user experience and productivity while keeping code complexity as low as possible.

For the implementation to be successful, we also need to have a back-end service, including an API and Database. The back-end server will contain the necessary service for the front-end to reach the purpose. Such as the RESTful API service, authentication service, MQTT service, Tunnel service and Database.

This project will follow the software design process. Therefore, it will also include the Software Development method and DevOps on all process as well.

This project is covered by NDA due to security and confidentiality reasons. Thus, the project will initially not be publicly deployed, however, I will described

the deployment in my report as well.

In order to address the issues identified, a comprehensive overhaul of the front-end is necessary. This involves a complete redesign and redevelopment of the existing system, with a particular emphasis on creating a modular, unified front-end management system. This new system will incorporate all the necessary functionalities, thereby eliminating the need for multiple interfaces and improving the overall user experience.

The primary goal of this redesign is to provide users with seamless control, monitoring, and access to their devices, regardless of their location. By streamlining the user interface and integrating all necessary functionalities into a single, unified system, we aim to enhance the overall user experience and increase productivity. Furthermore, by focusing on modularity in the design, we aim to keep code complexity as low as possible, thereby improving maintainability and scalability of the system.

Successful implementation of this redesign requires a robust back-end service, which includes an API and a Database. The back-end server will house the necessary services for the front-end to fulfill its purpose. These services include the RESTful API service, which will handle requests and responses between the front-end and the server; an authentication service, which will ensure secure access to the system; an MQTT service, which will handle messaging between devices; a Tunnel service, which will manage the creation and maintenance of secure tunnels for remote access; and a Database, which will store and manage all necessary data.

This project will adhere to the software design process, incorporating best practices from Software Development methodologies and DevOps principles throughout all stages. This includes requirements gathering, system design, implementation, testing, deployment, and maintenance. By following this process, we aim to ensure the delivery of a high-quality, reliable, and scalable system.

Due to security and confidentiality reasons, this project is covered by a Non-Disclosure Agreement (NDA). As such, the project will not initially be publicly deployed. However, the deployment process, including the strategies used for continuous integration and continuous deployment, as well as the measures taken to ensure security and reliability, will be described in detail in the final report.

3 Requirement Analysis

The requirement analysis in this project is based on the problem statement. After analyzing the problem statement, we will explore the perspectives of various stakeholders to understand their specific needs. This will help us gain a comprehensive understanding of the project requirements.

To ensure a focused approach, we will define the project's limitations and constraints. This will help us set realistic expectations and avoid scope creep.

Finally, we will establish clear and measurable goals for this project. These goals will serve as benchmarks to evaluate the success of the project and guide our development process.

3.1 Stakeholders

The stakeholders are the individuals or groups who are relevant to the issues of this project. There are three main stakeholders in this project:

- User
- Developer
- Project Owner

User The user is the person who will use the system. In this project, the user refers to the customer who will utilize the web application to manage their devices, users, and create the RAI and Tunnel.

The user's requirements for the web application include ease of operation, intuitive recognition of features, and clear usability.

Project Owner The project owner is the individual or organization responsible for managing the project. In this case, the project owner is the company that owns the product.

The project owner has several requirements for the project:

- Timely completion of the project.
- Compatibility with the hardware developed by the company.
- Easy maintenance, updates, migration, and handover to other developers.

Developer The developer is responsible for developing, modifying, scaling, and fixing the system in any situation.

To facilitate these tasks, the system should have clear and concise comments, a well-organized structure that is easy to modify, reusable components for easy scalability, and effective bug identification for efficient issue resolution.

3.2 Bussines Domain

Following the identified stakeholders, we can now analyze the business domain model. Based on the project requirements, the following entities can be identified in the business domain model:

Organization The organization has all the users and devices and can group them together. The organization has the following attributes:

- name: The name of the organization.
- users: A list of users.
- devices: A list of devices.
- groups: A list of groups.

User The user can be a technician or an operator who uses the device to connect to remote equipment. The user is the starting and ending point of all processes. The user has the following attributes:

- username: The identifier of the user.

Device The device is the hardware that connects to remote equipment, allowing the user to control it. The device has the following attributes:

- name: The identifier of the device.

Group The group is a collection of users and devices created by the organization. Only users and devices belonging to the same group can interact with each other. Users can create tunnels between devices in the same group. The group has the following attributes:

- name: The identifier of the group.
- users: A list of users.
- devices: A list of devices.

3.3 Scope

The scope of this project is to develop a web application that manages devices and users, and creates the RAI and Tunnel.

Since the device manager already exists, the main focus will be on implementing the RAI and Tunnel into the device manager.

Therefore, there is no need to develop the device manager or add new features to the RAI and Tunnel interface.

Due to the redundant and coupled nature of the entire system, we need to redesign the system components and establish their relationships.

As the Device Manager is built using the React framework, we will also use the same framework to develop the RAI and Tunnel interface.

The main focus of this project is to migrate the RAI and Tunnel interface, and re-design the UI, components, and the relevant methodologies.

3.4 Goals

The goal of this project is to develop a RAI and Tunnel interface in the Device Manager that can create, modify, delete, and view access connections. Additionally, it should have the capability to remotely control the device and target equipment.

4 Software Design

4.1 Software Development Methods

Project methodology refers to a systematic set of methods and principles adopted during project management and implementation. It includes specific steps and approaches for planning, organizing, implementing, monitoring, and closing different phases of the project.

Project methodology helps project teams effectively manage and control projects, ensuring timely, high-quality, and cost-effective completion, and achieving the desired goals and benefits.

Common project methodologies include Agile development, Waterfall model, and Iterative development.

Choosing the appropriate project methodology is crucial for project success.

4.1.1 Agile Software Development

The Agile software development is a set of software development methods to aim to provide a sustainable, iterative and incremental software development process.

The Agile promotes adaptive planning, evolutionary development, early delivery, and continuous improvement, and it encourages rapid and flexible response to change.

Since this project is a single person project, the Agile software development method is not suitable for this project. However, the Agile software development method is still a good reference for the project management.

Therefore, in this project will try to use part of the scrum method to manage the project daily tasks.

The fully period of this project from 10/15/2023 to 1/15/2024, which will cost three months. The project will be divided into six sprints, each sprint will be contain two weeks. The first sprint will be started from 10/15/2023 to 10/29/2023, and the last sprint will be started from 12/31/2023 to 1/15/2024.

4.1.2 Feature Driven Development

Feature Driven Development (FDD) is an iterative and incremental software development process.

The FDD is a model-driven short-iteration process that consists of five basic activities:

1. Develop an overall model
2. Build a feature list
3. Plan by feature
4. Design by feature
5. Build by feature

4.1.3 Develop an overall model

The first step of the FDD is to develop an overall model. The overall model is a domain model that preposed to let the application can have a basic structure and can be run for no feature. After the overall model is developed, the feature list can be created for adding the features to the application.

In this project, because the main focus of this project is to migrate the interfaces into the exist application, the overall model will be only fouce on the UI, state management, and constructure of interface in the Device Manager.

4.1.4 Feature list

The feature list is a list of the features that the application will have. It will following the use-case that be indentify in the user story. And connect the all front-end, back-end and database together. Therefore, the each feature will produce the sequence start from the front-end to the back-end and then to the database, and return the result to the front-end to display to the user.

4.2 Technology selection

As per the project requirements, we are tasked with constructing a comprehensive full-stack Browser/Server (B/S) system. This system will incorporate a robust database and integrate various essential services to ensure optimal functionality and performance.

4.2.1 Front-end

JAVASCRIPT JavaScript is the most popular language for the front-end development.

React is a JavaScript library for building user interfaces. It is maintained by Facebook and a community of individual developers and companies. React can be used as a base in the development of single-page or mobile applications. However, React is only concerned with state management and rendering that state to the DOM, so creating React applications usually requires the use of additional libraries for routing, as well as certain client-side functionality. React Router is an example of such a library.

React-Router is a routing library for React. It abstracts away the details of server and client and allows developers to focus on building apps. It offers a simple, declarative API to let you build URL (Uniform Resource Locator) routing with ease. It supports server-side rendering and comes with routers for browsers and Node.js.

Redux is a predictable state container for JavaScript apps. It helps you write applications that behave consistently, run in different environments (client, server, and native), and are easy to test. On top of that, it provides a great developer experience, such as live code editing combined with a time traveling debugger.

RTK is a powerful, opinionated Redux toolset for writing better reducers, organizing and accessing state in components, and managing side effects. It was originally created to help address three common concerns about Redux:

RTKQ is a powerful data fetching and caching tool. It is designed to simplify common cases for loading data in a web application, eliminating the need to hand-write data fetching & caching logic yourself.

TailwindCSS is a utility-first CSS framework for rapidly building custom user interfaces. It is a highly customizable, low-level CSS framework that gives you all of the building blocks you need to build bespoke designs without any annoying opinionated styles you have to fight to override.

Semantic UI is a development framework that helps create beautiful, responsive layouts using human-friendly HTML. Semantic UI treats words and classes as exchangeable concepts. Classes use syntax from natural languages like noun/modifier relationships, word order, and plurality to link concepts intuitively.

Jest is a JavaScript testing framework maintained by Facebook, Inc. designed and built by Christoph Nakazawa with a focus on simplicity and support for large web applications. It works with projects using Babel, TypeScript, Node.js, React, Angular, Vue.js and Svelte. Jest does not require a browser to run tests, and it runs tests in parallel - this makes Jest fast. Jest is well-documented, requires little configuration and can be extended to match your requirements.

4.2.2 Back-end

CSharp is a general-purpose, multi-paradigm programming language.

ASP.NET Core is a cross-platform, high-performance, open-source framework for building modern, cloud-based, Internet-connected applications.

Entity Framework is an open-source ORM framework for .NET applications supported by Microsoft.

4.2.3 Database

SQLite is a C-language library that implements a small, fast, self-contained, high-reliability, full-featured, SQL database engine.

4.2.4 Data communication

HTTP is an application-layer protocol for transmitting hypermedia documents, such as HTML. It was designed for communication between web browsers and web servers, but it can also be used for other purposes. HTTP follows a classical client-server model, with a client opening a connection to make a request, then waiting until it receives a response. HTTP is a stateless protocol, meaning that the server does not keep any data (state) between two requests. Though often based on a TCP/IP layer, it can be used on any reliable transport layer; that is, a protocol that doesn't lose messages silently, such as UDP.

Flatbuffers is an efficient cross platform serialization library for C++, C#, C, Go, Java, JavaScript, Lobster, Lua, TypeScript, PHP, Python, and Rust. It was originally created at Google for game development and other performance-critical applications.

MQTT is a machine-to-machine (M2M)/"Internet of Things" connectivity protocol. It was designed as an extremely lightweight publish/subscribe messaging transport. It is useful for connections with remote locations where a small code footprint is required and/or network bandwidth is at a premium.

webrtc is a free, open-source project that provides web browsers and mobile applications with real-time communication (RTC) via simple application programming interfaces (APIs). It allows audio and video communication to work inside web pages by allowing direct peer-to-peer communication, eliminating the need to install plugins or download native apps.

4.2.5 DevOps

Git is a distributed version-control system for tracking changes in source code during software development. It is designed for coordinating work among programmers, but it can be used to track changes in any set of files. Its goals include speed, data integrity, and support for distributed, non-linear workflows.

GitHub is a provider of Internet hosting for software development and version control using Git. It offers the distributed version control and source code management (SCM) functionality of Git, plus its own features. It provides access control and several collaboration features such as bug tracking, feature requests, task management, and wikis for every project.

GitHub Actions is an API for cause and effect on GitHub: orchestrate any workflow, based on any event, while GitHub manages the execution, provides rich feedback, and secures every step along the way. With GitHub Actions, workflows and steps are just code in a repository, so you can create, share, reuse, and fork your software development practices.

Docker is a set of platform as a service (PaaS) products that use OS-level virtualization to deliver software in packages called containers. Containers are isolated from one another and bundle their own software, libraries and configuration files; they can communicate with each other through well-defined channels. All containers are run by a single operating system kernel and are thus more lightweight than virtual machines. Containers are created from images that specify their precise contents. Images are often created by combining and modifying standard images downloaded from public repositories.

4.3 Architecture design

The overall architecture design outlines the comprehensive structure of the system. The primary objective of this design is to ensure the system's functionality, reliability, scalability, and maintainability.

In this project, the architecture design is based on the Client/Server (C/S) model, with an additional module incorporated for facilitating remote communication.

The client-side of the application is a web browser, serving as the primary interface for user interaction. User operations include data requests, information display, data modification, device configuration, and the creation and management of classic remote access and tunnels.

The server-side of the application is responsible for processing client requests, executing database operations (such as Create, Read, Update, and Delete operations) based on the request content, and returning the results to the client.

The additional module in the back-end for remote communication is designed to implement the functionality of remote communication, ensuring its reliability, scalability, and maintainability. In this context, the MQTT protocol is employed, with the open-source Mosquitto serving as the MQTT server and the open-source Paho as the MQTT client. WebRTC, an open-source technology, is utilized for remote communication.

The system utilizes a Relational Database Management System (RDBMS), specifically SQLite, for data management.

In the C/S architecture, the RESTful API serves as the interface definition, JSON is used as the data transmission format, and HTTP is used as the data transmission protocol. Between the front-end with the MQTT broker and webRTC server, the FlatBuffers protocol will be implemented into this data transmission.

And there are an end point which is the device will also create a connection together with the Front-end and Back-end.

4.3.1 Front-end

In the architecture design of the front-end, the goal is to meet the user's usage requirements, which includes intuitive operations for data manipulation (create, read, update, delete) and simple creation of data channels, as well as managing and visualizing data channels.

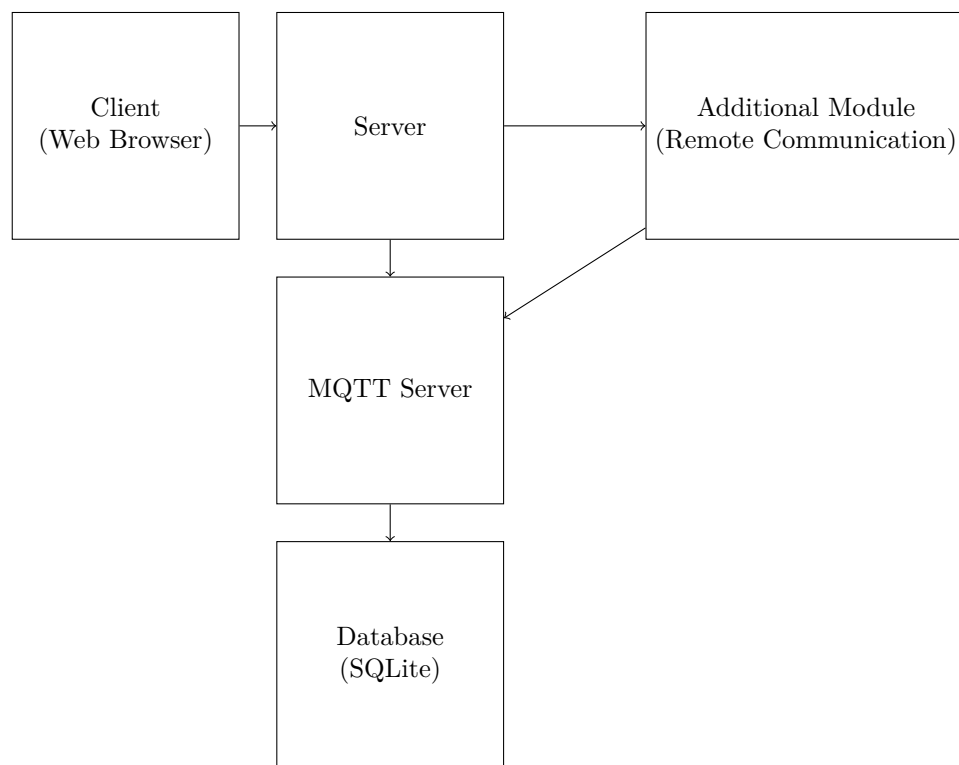



Figure 1: System Architecture Diagram

Therefore, the front-end utilizes the React framework based on view design and the Redux framework based on state and data flow.

The structure of the React framework divides the web page into multiple components based on modularity. Each component has its own state and properties. Components are categorized into container components, presentational components, and functional components.

Container components manage data and state, presentational components display data and state, and functional components implement specific functionalities.

In this project, following the structure of the React framework and adopting a component-based approach, the entire project is divided into the following components:

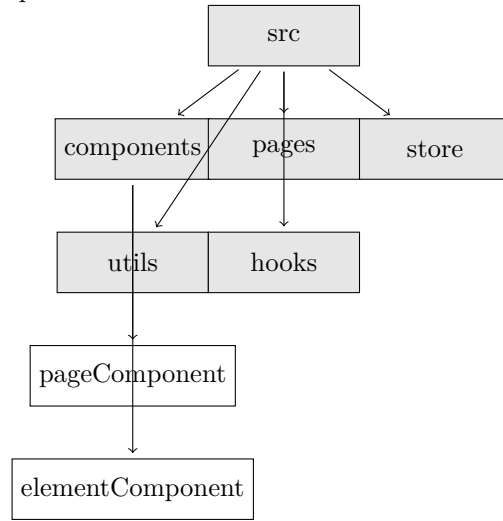

4.3.2 Back-end

The backend uses the dotNet framework. In the dotNet framework, development is done using the C# language. The Onion Architecture is adopted, The Onion Architecture is a typical layered architecture, where each layer depends on the inner layer and provides interfaces to the outer layer. The outer layer provides services to the outermost layer and other modules in the same layer based on the interfaces of the inner layer.

From inner to outer, the layers are: Domain, Application, Infrastructure, Presentation. The Domain layer is the core layer and the innermost layer, used to define domain models, which are the business models. It includes domain models and domain service interfaces. Domain models are used to define the business models, which are the entities in the entity-relationship model and their attributes. Domain service interfaces are used to define the business services, which are the relationships between entities in the entity-relationship model.


The Application layer is the application layer, used to define application ser-

vices, which are the business logic. It includes domain service implementations and application service interfaces. Domain service implementations implement the methods of the inner layer's domain service interfaces and implement the business logic of the domain models. Application service interfaces are used to define application services, which are the business logic. It includes but is not limited to database interfaces, testing interfaces, HTTP API interfaces, MQTT interfaces, etc.

The Infrastructure layer is the infrastructure layer, used to define infrastructure. It includes database implementations, testing implementations, HTTP API implementations, MQTT implementations, etc. Database implementations implement the database interfaces and provide CRUD services for the database. Testing implementations implement the testing interfaces and provide services for unit testing and integration testing. HTTP API implementations implement the HTTP API interfaces and provide CRUD operations for HTTP APIs. MQTT implementations implement the MQTT interfaces and provide CRUD operations for MQTT.

The Presentation layer is the presentation layer, used to define presentation logic, such as interfaces and pages. Since this is a backend project, data presentation and control are handled by the frontend, so this layer is not needed.

Presentation Layer

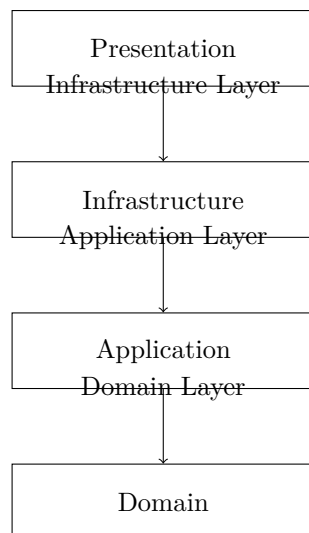

4.3.3 Data communication and storage

Design of data communication: 1. Selection of communication protocols There are three types of data transmitted from the front-end to the back-end: - Requests for basic CRUD operations, which have low requirements for timeliness but require accuracy, integrity, order, and security. For this type of data trans-

mission, the HTTP protocol and RESTful API design are used to effectively meet the above requirements. - Creation of data channels and transmission of streaming media data, which require high timeliness and security. For this type of data transmission, the WebRTC protocol and MQTT protocol are used, along with the fast-decoding flatbuffers protocol, to effectively meet the above requirements. - Transmission of device status information and operation information, which require high integrity, order, and security. For this type of data transmission, the MQTT protocol is used along with the flatbuffers protocol.


2. Communication architecture and flow of data communication The data communication architecture of this project is based on a front-end and back-end separation architecture, with React framework used for the front-end and dotnet framework used for the back-end. When the front-end needs to send data to the back-end, it sends an HTTP request to the back-end. Upon receiving the HTTP request, the back-end selects different data processing methods based on the data type of the request. For basic CRUD requests, the back-end performs CRUD operations on the data based on the RESTful API design. For the creation of data channels and transmission of streaming media data, the back-end creates data channels based on the WebRTC protocol and helps establish data channels between the front-end and devices. Once the data channel is established, the front-end and devices use the flatbuffer data format for streaming media data transmission. For the transmission of device status information and operation information, the front-end directly sends MQTT requests to the MQTT broker. The devices listen to the relevant MQTT requests in their firmware and return the corresponding data.

3. Data formats for data communication There are three data formats for data communication in this project: - HTTP protocol: Data is transmitted using the JSON format. - WebRTC protocol: Data is transmitted using the flatbuffers format. - MQTT protocol: Data is transmitted using the flatbuffers format.

Design of data storage: 1. Selection of database for data storage For data storage in this project, a lightweight database SQLite is used. SQLite is an in-process library that implements a self-contained, serverless, zero-configuration, transactional SQL database engine. This choice is made because the purpose of the entire project is to achieve data communication between the front-end and devices. There is no high requirement for database operations such as CRUD, the data volume is small, and the transactional requirement for database data is not high. Therefore, SQLite database is chosen.

2. Design of data structures for the front-end and back-end of the project In this project, the front-end uses the React framework, so the design of data structures for the front-end adopts a state-based approach. Each component or data set contains a state object, and the properties of this state object represent the various states of the component. The use of state objects facilitates state management. By using the object-property form, it is easy to distinguish between similar states of different components. Since cross-component states are managed by Redux, this design of state objects enables easier state updates and transfers. The back-end uses the dotnet framework, so the design of

data structures for the back-end adopts a class-based approach. Object-oriented programming principles are used to encapsulate data, making data transmission more secure, ordered, and complete.

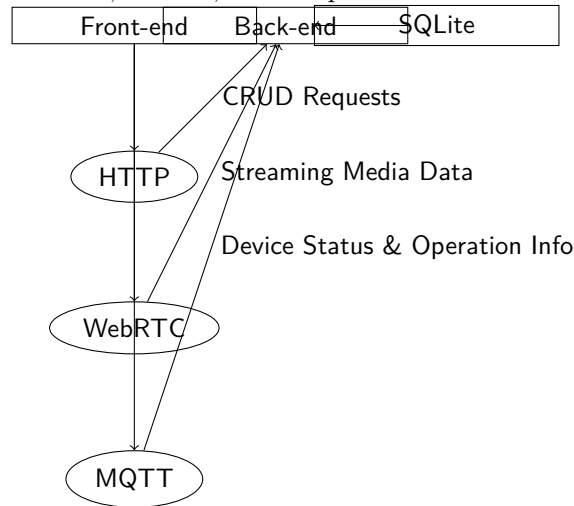

4.4 Domain model

From the business domain model, the entities and relation can be abstracted to the object domain model.

4.5 DevOps CI/CD process design

- 1.
- 2.
- 3.
- 4.
- 5.

4.5.1 Continuous Integration

4.5.2 Continuous Delivery

4.5.3 Continuous Deployment

5 Software Development

5.1 Front-end

5.2 Back-end

5.3 Database

5.4 WebRTC

5.5 MQTT

5.6 RESTful API

5.7 Authentication

6 Conclusion

6.1 Result

6.2 Discussion

6.3 Future Work