

# Bi-fold Doors








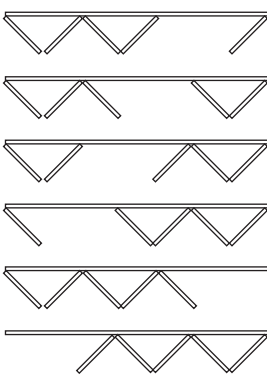
Region B:

N2	Wind Classification
400Pa	Serviceability
1000Pa	Ultimate Strength
150Pa	Water Penetration


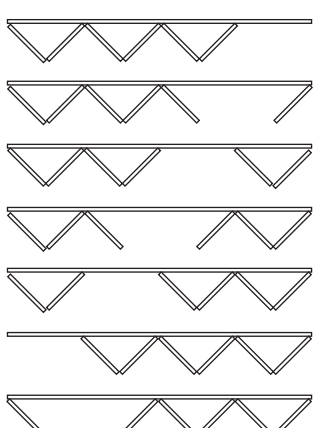
## SIZES

Availability of sizes subject to wind load and water penetration requirements

Region C: Design wind pressure is calculated to 'AS/NZS 1170.2 Structural design actions – Wind action'

FRAME SIZE		1600mm	2400mm	3200mm	4000mm
		2 LITE	3 LITE	4 LITE	5 LITE
2130mm	2100mm				
2430mm	2400mm				
		220	321	440	541
		202	312	431	532
			330	422	523
			303	413	514
				404	550
					505

FRAME SIZE		4800mm
		6 LITE
2130mm	2100mm	
2430mm	2400mm	
		660
		651
		642
		633
		624
		606
		615

### Bi-Fold Numbering

eg: **321** (View from left to right)

3	2	1
Total panels	No of panels opening to left	No of panels opening to right

**Note:** Bi-fold Doors may be subject to local variation or regulatory requirements