


C-View's

sliding doors



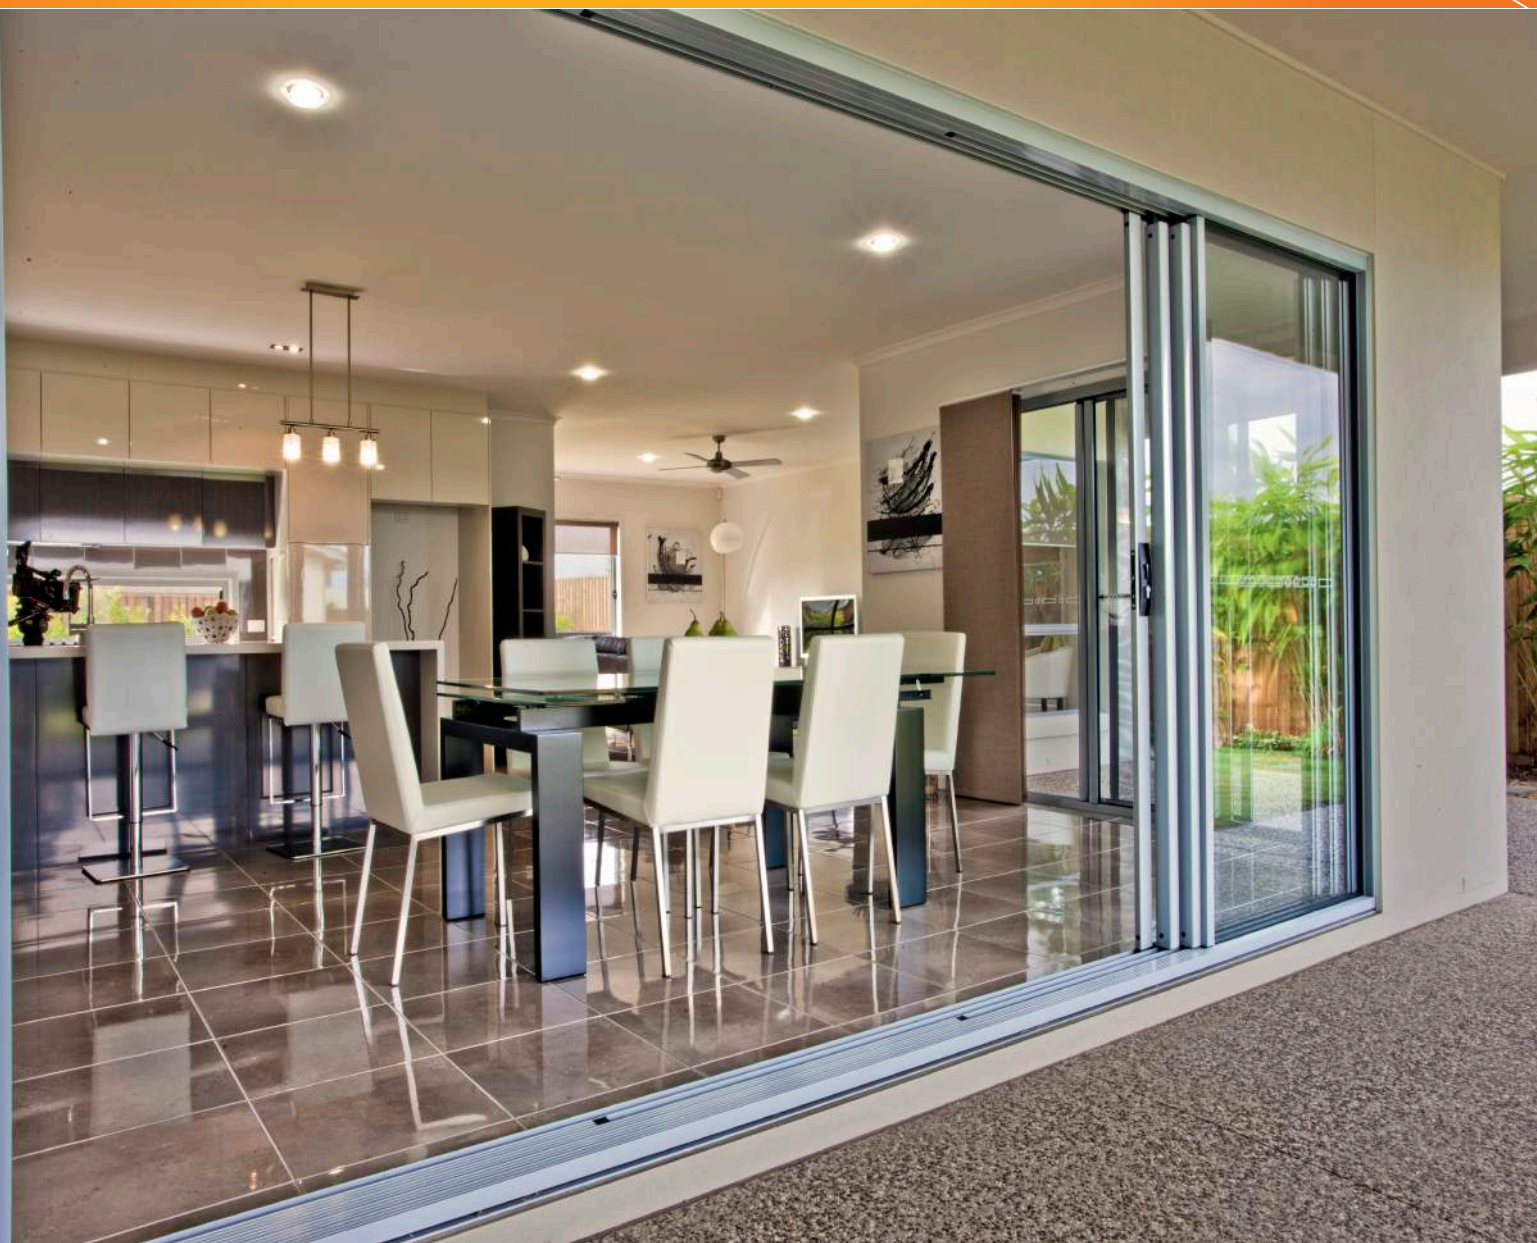

Residential range

Features and Benefits

- Functional and easy living design
- Clean finish and appearance thanks to concealed fixings
- Stylish handles are fitted with mortice locks for superior security
- Conveniently located key cylinders for easier operation
- High performance roller system ensures smooth sliding action
- Rounded and capped sections reduce the likelihood of curtains being torn by sharp edges
- Integrated insect, safety and security screen options
- Low profile sill option for minimal hindrance to wheeled or foot traffic

Performance Parameters

Frame sizes	80mm / 140mm
Maximum door height	2450mm
Maximum door width	6246mm
Maximum panel width	1350mm
Maximum panel weight	50kgs
Maximum water rating	300pa
Maximum wind rating	3300Pa ULS
Maximum glass thickness	6.76mm
Maximum acoustic rating	Rw30
Maximum bushfire rating	BAL 40

Note: Features, benefits and performance parameters are subject to local variations, climate requirements and confirmation of structural performance



Residential range

Features and Benefits

- Modern design suited for architecturally creative projects
- Refreshing lifestyle options like corner and cavity configurations available
- Clean finish and appearance thanks to concealed fixings
- Stylish handles are fitted with mortice locks for superior security
- High performance roller system ensures smooth sliding action
- Rounded and capped sections reduce the likelihood of curtains being torn by sharp edges
- Integrated insect, safety and security screen options
- Low profile sill option for minimal hindrance to wheeled or foot traffic^
- Santoprene seals for improved UV stability resulting in better weather resistance

Performance Parameters

Frame sizes	100mm / 166mm
Maximum door height	2700mm^
Maximum door width	6246mm^
Maximum panel width	1350mm^
Maximum panel weight	100kgs
Maximum water rating	600pa*
Maximum wind rating	4500Pa ULS
Maximum glass thickness	12.76mm (single glazed) 20mm (IGUs)
Maximum acoustic rating	Rw44
Maximum bushfire rating	BAL 40

^ Not applicable to cavity configurations

* Does not apply to 166mm frame



Prestige range

Features and Benefits

- Modern design suited for architecturally creative projects
- Multi-track systems enable solutions to almost any high-end application
- Refreshing lifestyle options like corner and cavity configurations available
- Clean finish and appearance thanks to concealed fixings
- Stylish handles are fitted with mortice locks for superior security
- High performance roller system ensures smooth sliding action
- Integrated insect, safety and security screen options
- Low profile sill option for minimal hindrance to wheeled or foot traffic^

Performance Parameters

Frame sizes	100mm / 150mm 200mm / 250mm
Maximum door height	3100mm^
Maximum door width	12000mm^
Maximum panel width	1800mm^
Maximum panel weight	160kgs
Maximum water rating	650pa
Maximum wind rating	6000Pa ULS
Maximum glass thickness	10.76mm (single glazed) 28mm (IGUs)
Maximum acoustic rating	Rw34
Maximum bushfire rating	BAL 40

^ Not applicable to cavity configurations