

# Batman BM101 mmWave EVM kit



## mmWAVE SENSOR EVALUATION SOLUTION

### mmWAVE SENSOR EVALUATION SOLUTION

Joybien Batman BM101 mmWave EVM kit is a compact, low power, high accuracy, and simple-to-use Millimeter-Wave (mmWave) Sensor Hardware & Software integrated evaluation kit suitable for various applications including: Education, Engineering, Science, Automotive, Industrial, Medical, and Business & Consumer applications.

#### Batman BM101 EVM Kit package includes

- A Small & Compact application dedicated mmWave Sensor Module based on Texas Instruments (TI) IWR1642 76GHz~81GHz mmWave ASIC , with pin-connection for UART communication.
- A Raspberry Pi-Hat Board with optional JBT24M Bluetooth Module; and that this Hat Board can also work independently for connecting the mmWave Sensor Module to other MCU based Hardware Board such as an Arduino Board, etc.
- An iOS mmWave Demo App available for download on Apple App Store.(Not including Short Range Radar)
- A Python SDK on GitHub available for developing software on Raspberry Pi and other computers, which is a perfect companion for AI + IoT Integration Implementation
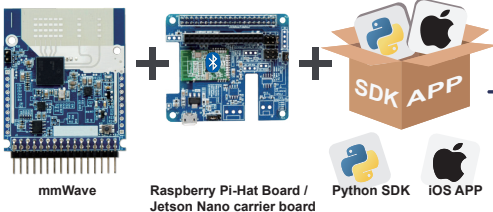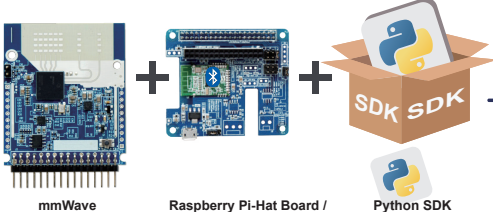
| Batman BM101 EVM Kit includes      |                                                                                                                                                                                                                        |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (VSD)<br>Vital Signs Detection     |  <p>mmWave + Raspberry Pi-Hat Board / Jetson Nano carrier board + SDK APP</p> <p>Python SDK iOS APP</p> <p>For VSD,PMB and HAM</p> |
| (HAM)<br>High Accuracy Measurement |                                                                                                                                                                                                                        |
| (PMB)<br>People Movement Behavior  |                                                                                                                                                                                                                        |
| (SRR)<br>Short Range Radar         |  <p>mmWave + Raspberry Pi-Hat Board / Jetson Nano carrier board + SDK SDK</p> <p>Python SDK</p> <p>For SRR and ZOD</p>             |
| (ZOD)<br>Zone Occupancy Detection  |                                                                                                                                                                                                                        |

#### Batman BM101 EVM Kit is for

- Technologically inclined engineering professors & students, scientists, electronics hardware & software engineers, automotive engineers and technologists, electronics hobbyists, etc.
- For a Novice, the user may follow the included sample Apps via Bluetooth wireless connectivity to iPhone/iPad to gain mmWave Radar's practical experience.
- For an Intermediate User, the user may apply Batman Kit for the Target Application by configuring Hardware I/O Port, and designing Software based on the included SDK
- For an Advanced User, the user may utilize Batman Kit as an IoT Sensor End Device for AI+IoT application with Deep Learning

# Batman BM101 mmWave EVM kit

## mmWAVE SENSOR EVALUATION SOLUTION

### mmWAVE SENSOR EVALUATION SOLUTION

#### Specification


|                                    |                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (VSD)<br>Vital Signs Detection     | For a contactless and wearableless human Vital Signs Detection (VSD) with real-time Heartbeat Rate & Respiration Rate data, for range of 30cm ~ 90cm (about 1~3 feet); along with Status Indicator for sensing the presence of a person, as well as the measurement stability, and whether the person is present but without Vital Signs.      |
| (HAM)<br>High Accuracy Measurement | For a wireless High Accuracy Measurement (HAM) of an object distance with range of 30cm ~ 3 meters (about 1~10 feet), having millimeter measurement resolution.                                                                                                                                                                                |
| (PMB)<br>People Movement Behavior  | For a wireless People Movement Behavior (PMB) detection in 4 x 4 meter or 16 meter square area (or about 172 square feet); and with software that could set virtual geo-fence(s) to trigger alert or action when People are moving into the geo-fence(s).                                                                                      |
| (SRR)<br>Short Range Radar         | For Short Range Radar (SRR) detection of human in 1 meter ~ 20 meters (about 3 ~ 66 feet), or detection of vehicle in 1 meter ~ 50 meters (about 3 ~ 164 feet), along with viewing angle of 120 degrees; along with Doppler Data to distinguish for whether the objects are moving-towards or moving-away from the mmWave sensor.              |
| (ZOD)<br>Zone Occupancy Detection  | For plotting a Range-Azimuth-Heatmap with a 64 x48 Grid Matrix covering: Range of 3meter/64row (approx. 0.047meter per row) x Azimuth of 120degree/48column (approx. 2.5degree/column). Subsequently a programmer may write a program to group the Grid(s) into Zone(s) for detecting whether the particular Zone(s) is occupied by Target(s). |

# Batman BM101 mmWave EVM kit



mmWAVE SENSOR EVALUATION SOLUTION

## mmWAVE SENSOR EVALUATION SOLUTION

- Make sure you are using the correct power supply of 5 V, >2.0 A with a Micro USB

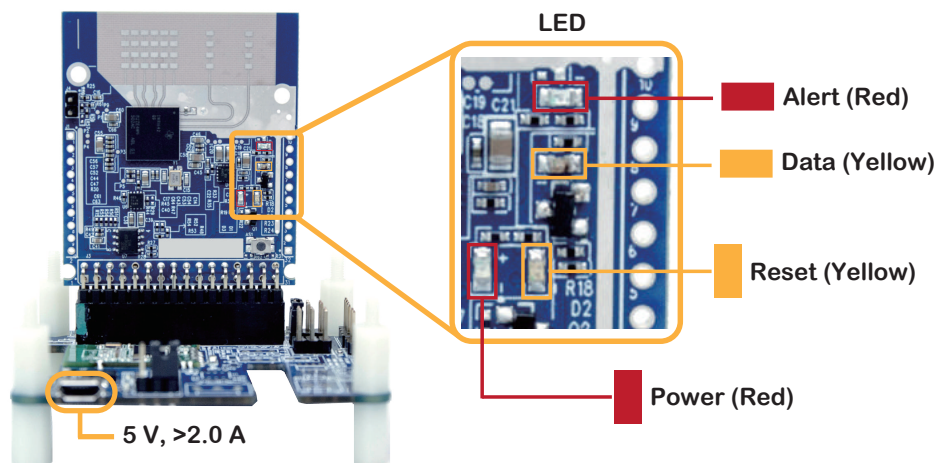

## Develop SDK: Python SDK

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (VSD)<br>Vital Signs Detection     | <ul style="list-style-type: none"> <li>● Available on GitHub</li> <li><b>Note: Please refer to README.md file first for proper configuration</b></li> </ul> <div>  <div> <h1>GitHub</h1> <p><a href="https://github.com/bigheadG/mmWave">https://github.com/bigheadG/mmWave</a></p> </div>  </div> |
| (HAM)<br>High Accuracy Measurement |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| (PMB)<br>People Movement Behavior  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| (SRR)<br>Short Range Radar         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| (ZOD)<br>Zone Occupancy Detection  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

# Batman BM101 mmWave EVM kit

mmWAVE SENSOR EVALUATION SOLUTION

## mmWAVE SENSOR EVALUATION SOLUTION

### APP Demos: VSD, HAM and PMB

- Available on Apple App Store for Vital Signs Detection, High Accuracy Measurement and People Movement Behavior.
- (Not including Short Range Radar and Zone Occupancy Detection)

mmWaveApi


Free APP Download




iOS mmWave  
Demo App




Vital Signs  
Detection (VSD)

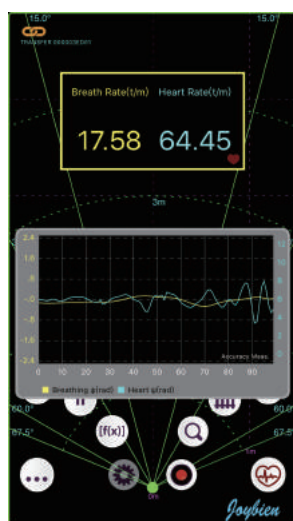

High Accuracy  
Measurement (HAM)

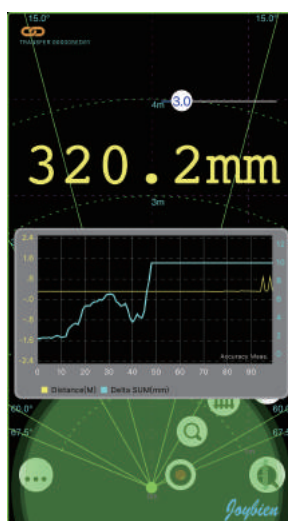

People Movement  
Behavior (PMB)

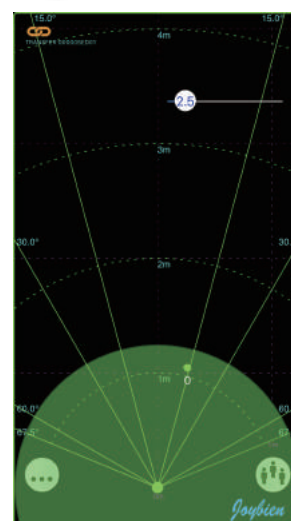


# Batman BM101 mmWave EVM kit

mmWAVE SENSOR EVALUATION SOLUTION

## mmWAVE SENSOR EVALUATION SOLUTION

### Selection : Key Data Mode or Raw Data Mode Application

#### (A) Raw Data Mode

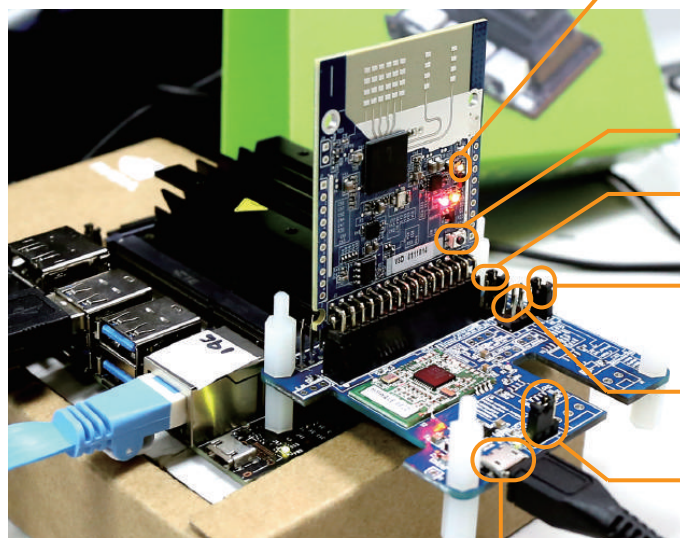

**DATA LED (Yellow):**

After Pressing the RESET Button, the Yellow LED will be flashing to indicate normal operation

**RESET**

**JUMPER J1** at 1,2 position for Raspberry Pi / Jetson Nano selection

**JUMPER J12** at 1,2 position for Raspberry Pi / Jetson Nano Interrupt Jumper

**JUMPER J4** at 5,6 position for RX0

**JUMPER J9** at 1,2 position for Raw Data Mode (921600/8/n/1)


INPUT DC POWER: 5VDC, >= 2A

#### (B) Key Data Mode

This is for Bluetooth Data Transfer usage, NOT USED if using Raspberry Pi 4 / NVIDIA Jetson Nano / External Microprocessor

**DATA LED (Yellow):**

After Pressing the RESET Button, the Yellow LED will be flashing to indicate normal operation

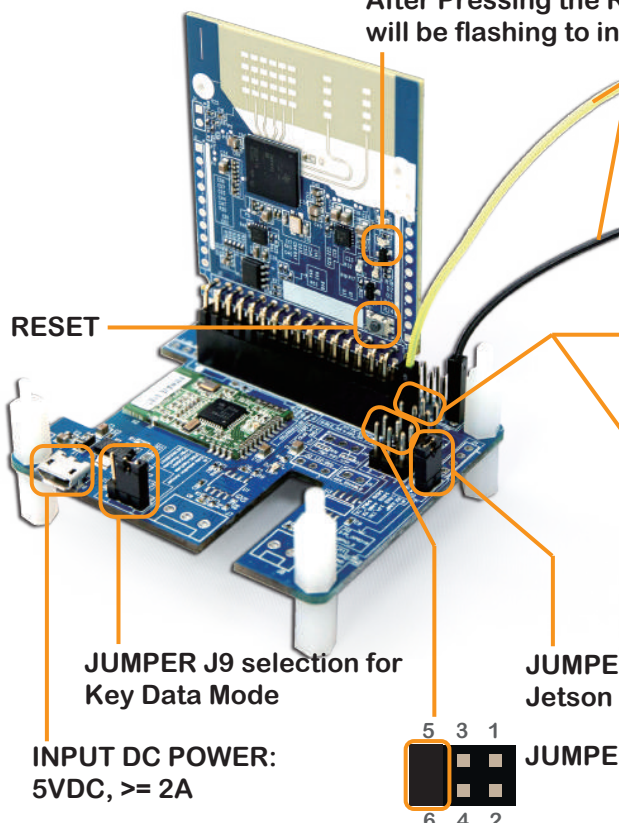

Wire connections for external microprocessor access on the HAT-Board, and where:

J1 PIN3 Yellow Wire location is for UART TX1 at 115200/8/n/1;

J3 PIN39 Black Wire location is for GND

Note: The UART Voltage Level is 3.3VDC (NOT 5VDC). Please handle with care.

**JUMPER J1** at 1,2 position for Raspberry Pi / Jetson Nano selection

**JUMPER J1** at 5,6 position for Bluetooth selection  
Vital Signs Detection,  
High Accuracy Measurement and  
People Movement Behavior.  
(Not including Short Range Radar)

**JUMPER J12** at 1,2 position for Raspberry Pi / Jetson Nano Interrupt Jumper

**JUMPER J4** at 5,6 position for RX0

INPUT DC POWER:  
5VDC, >= 2A




# Batman BM101 mmWave EVM kit

mmWAVE SENSOR EVALUATION SOLUTION

## mmWAVE SENSOR EVALUATION SOLUTION

### Batman BM101 Module J3 Pin Assignment Note

PINHEADER J3 PIN12\_GPIO\_0 High: Raw Data Baud Rate 921600/8/n/1 selection for PIN23\_TX1  
 PINHEADER J3 PIN12\_GPIO\_0 Low : Key Data Baud Rate 115200/8/n/1 selection for PIN23\_TX1

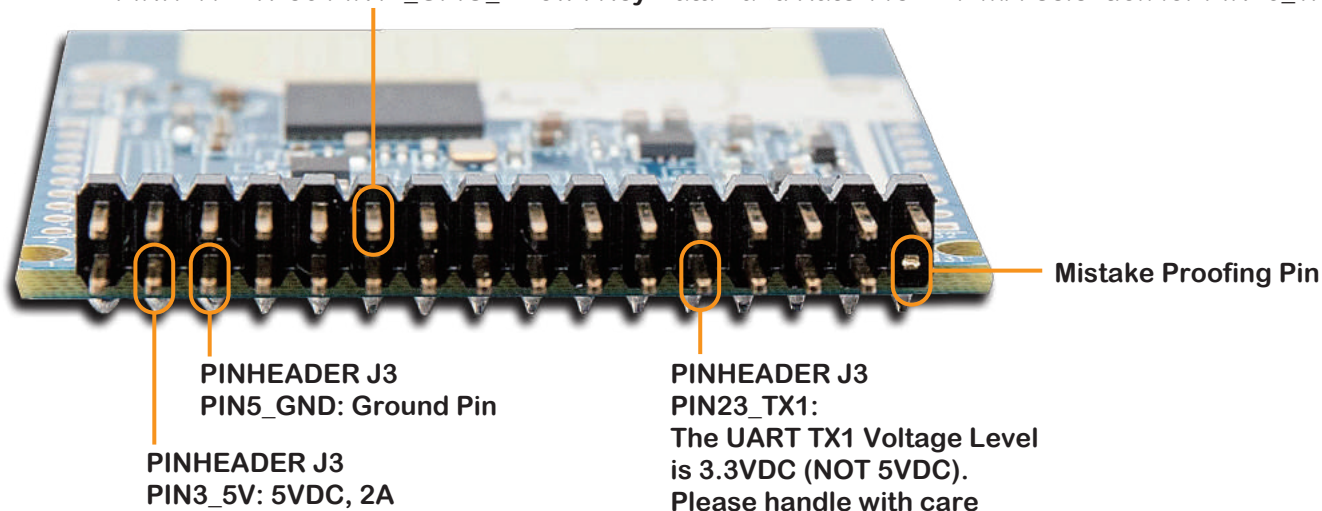


Alert : All GPIO Pins base on 3.3V System. Pin23\_TX1 is DC 3.3V system.

### Batman BM101 EVM Kit + External Microprocessor

Wire connections for external microprocessor access on the HAT-Board

J3 PIN39 Black Wire location is for GND

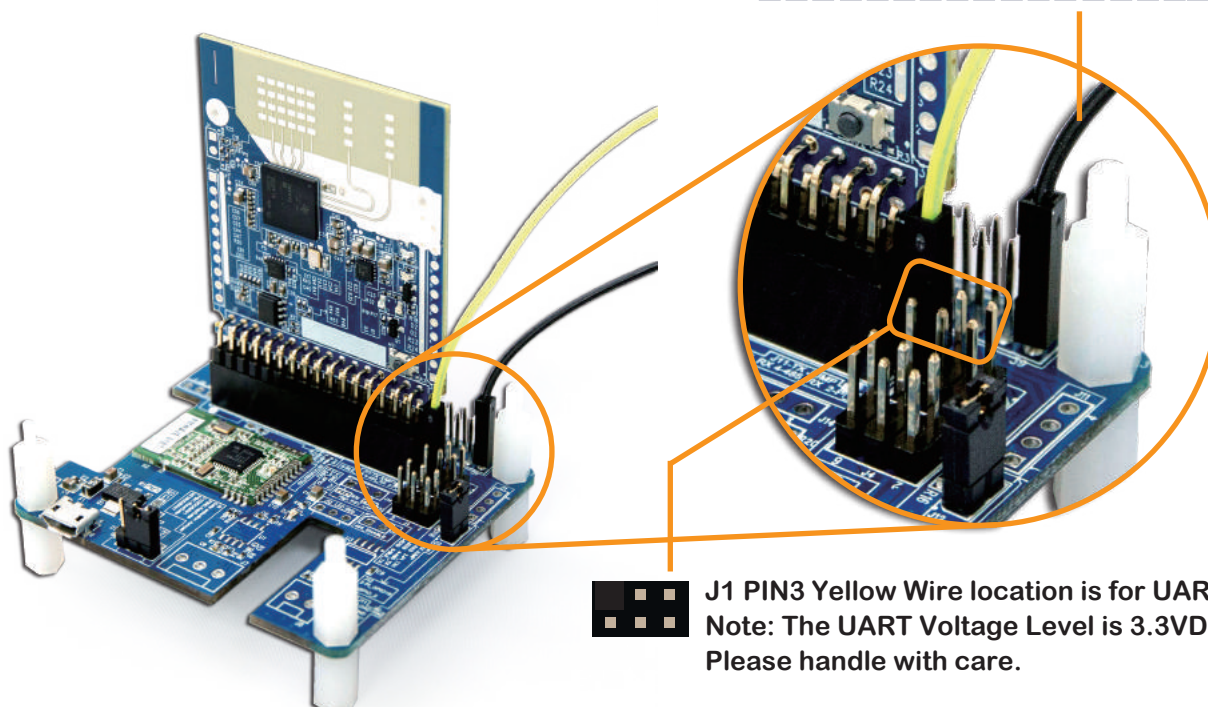

# Batman BM101 mmWave EVM kit

mmWAVE SENSOR EVALUATION SOLUTION

## mmWAVE SENSOR EVALUATION SOLUTION


Batman Kit + NVIDIA Jetson Nano / Batman Kit + Raspberry Pi

Please make sure that the JUMPER SETTING is for Raw Data Mode

### Batman BM101 EVM Kit + NVIDIA Jetson Nano




### Batman BM101 EVM Kit + Raspberry Pi

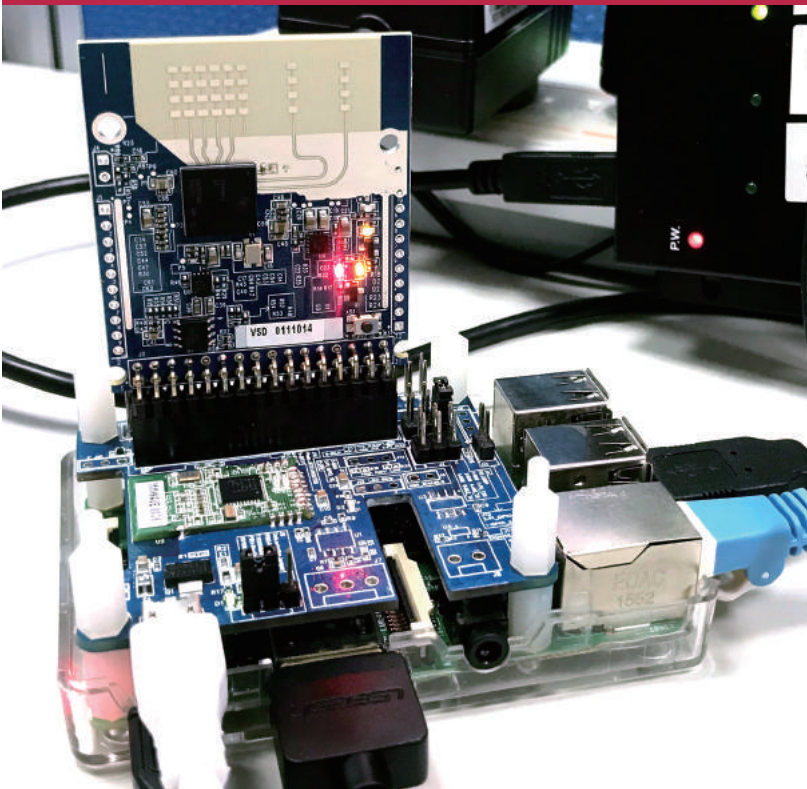

# Batman BM101 mmWave EVM kit

## mmWAVE SENSOR EVALUATION SOLUTION

### mmWAVE SENSOR EVALUATION SOLUTION

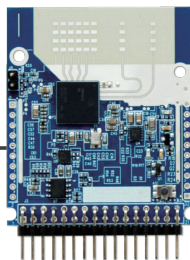

## Specifications

### mmWave Sensor Evaluation Module

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FMCW Transceiver                                | <ul style="list-style-type: none"> <li>● Integrated PLL, Transmitter, Receiver, Baseband, and A2D</li> <li>● 76- to 81-GHz Coverage With 4-GHz</li> <li>● Continuous Bandwidth</li> <li>● Four Receive Channels</li> <li>● Two Transmit Channels</li> <li>● Ultra-Accurate Chirp (Timing) Engine Based on Fractional-N PLL</li> <li>● TX Power: 12.5 dBm</li> <li>● RX Noise Figure:               <ul style="list-style-type: none"> <li>14 dB (76 to 77 GHz)</li> <li>15 dB (77 to 81 GHz)</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Built-in Calibration and Self-Test (Monitoring) | <ul style="list-style-type: none"> <li>● ARM® Cortex® -R4F-Based Radio Control System</li> <li>● Built-in Firmware (ROM)</li> <li>● Self-calibrating System Across Frequency and Temperature</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| DSP                                             | <ul style="list-style-type: none"> <li>● C674x DSP for FMCW Signal Processing</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| MCU                                             | <ul style="list-style-type: none"> <li>● ARM Cortex-R4F Microcontroller for Application Control</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| I/O                                             | <ul style="list-style-type: none"> <li>● SPI / CAN x 1</li> <li>● Up to 2 UARTs</li> <li>● I2C x 1</li> <li>● GPIO: 0 ~ 2</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Antenna                                         | <ul style="list-style-type: none"> <li>● Tx Antenna x 2 on Board</li> <li>● Rx Antenna x 4 on Board</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Pre-Programmed Firmware “Flavor”                | <ul style="list-style-type: none"> <li>● Vital Signs Detection (VSD) Firmware; for 30cm ~ 90cm wireless &amp; contactless detection of Heartbeat &amp; Respiration Rate</li> <li>● High Accuracy Measurement (HAM) Firmware; for 30cm ~ 300cm distance measurement with millimeter resolution</li> <li>● People Movement Behavior (PMB) Firmware; for detecting People Movement in 4m x 4m or 16 meter-square region for setting geo-fence(s) trigger action</li> <li>● Short Range Radar (SRR) Firmware; for detecting objects’ distance with the range of 20meters ~ 50meters (about 66 ~ 164 feet) and with viewing angle of 120 degrees, along with Doppler Data to distinguish for whether the objects are moving-towards or moving-away from the mmWave sensor.</li> <li>● Zone Occupancy Detection (ZOD) Firmware; for plotting a Range-Azimuth-Heat-map with a 64 x48 Grid Matrix covering: Range of 3meter/64row (approx. 0.047meter per row) x Azimuth of 120degree/48column (approx. 2.5degree/column). Subsequently a programmer may write a program to group the Grid(s) into Zone(s) for detecting whether the particular Zone(s) is occupied by Target(s).</li> </ul> <p>Note: ONLY one of VSD, HAM, or PMB Firmware is pre-programmed within a single mmWave Module</p> |




# Batman BM101 mmWave EVM kit

## mmWAVE SENSOR EVALUATION SOLUTION

### mmWAVE SENSOR EVALUATION SOLUTION

|                                             |                                                                                                                 |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Operating Temperature<br>Operating Humidity | <ul style="list-style-type: none"> <li>● 0° to 40° degree Celsius</li> <li>● 10 ~ 85% Non-Condensing</li> </ul> |
| Dimensions & Weight                         | <ul style="list-style-type: none"> <li>● 54.1mm x 45.7mm; 13.7 grams net</li> </ul>                             |

### mmWave Raspberry Pi Hat

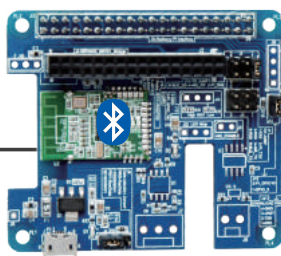

|                                             |                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connector                                   | <ul style="list-style-type: none"> <li>● Matching mmWave Module Female Connector</li> <li>● Matching Raspberry Pi GPIO Female Connector</li> <li>● Micro USB Power Connector</li> <li>● Jumpers for Bluetooth Tx/Rx or Raspberry Pi Tx/Rx Selection</li> <li>● Jumper for mmWave Raw Data or Key Data Selection</li> </ul> |
| Bluetooth (optional)                        | <ul style="list-style-type: none"> <li>● Joybien JBT24M Bluetooth Low Energy Module</li> </ul>                                                                                                                                                                                                                             |
| Micro USB Input Power                       | <ul style="list-style-type: none"> <li>● 5VDC, 2Amp.</li> </ul> (Note: Power Adapter and Micro USB Cable NOT included)                                                                                                                                                                                                     |
| Operating Temperature<br>Operating Humidity | <ul style="list-style-type: none"> <li>● 0° to 40° degree Celsius</li> <li>● 10 ~ 85% Non-Condensing</li> </ul>                                                                                                                                                                                                            |
| Dimensions & Weight                         | <ul style="list-style-type: none"> <li>● 65.3mm x 56.3mm</li> <li>30 grams with JBT24M Bluetooth</li> </ul>                                                                                                                                                                                                                |

# Batman BM101 mmWave EVM kit


mmWAVE SENSOR EVALUATION SOLUTION

mmWAVE SENSOR EVALUATION SOLUTION

## mmWave Pin Assignment

### J1 J1 Pin Assignment

| Pin# | Name     |
|------|----------|
| 01   | GND      |
| 03   | ANATEST1 |
| 05   | ANATEST2 |
| 07   | DP0      |
| 09   | DP1      |
| 11   | DP2      |
| 13   | DP3      |
| 15   | DP4      |
| 17   | DP5      |
| 19   | DP6      |

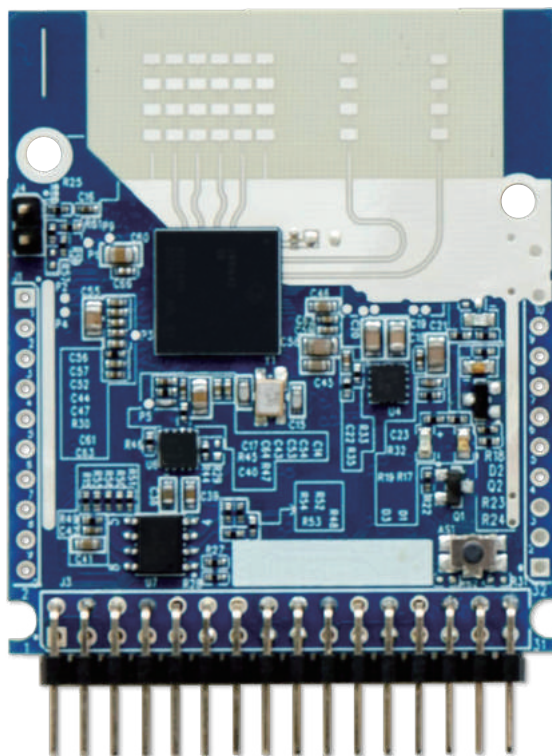


### J2 J2 Pin Assignment

| Name       | Pin# |
|------------|------|
| GND        | 10   |
| ANAMUX     | 09   |
| OSC CLKOUT | 08   |
| VSENSE     | 07   |
| DP8        | 06   |
| DMM CLK    | 05   |
| DMM SYNC   | 04   |
| HOSTINTR1  | 03   |
| MCUCLKOUT  | 02   |
| DP7        | 01   |

### J3 J3 Pin Assignment

| Pin# | Name             | Name          | Pin# |
|------|------------------|---------------|------|
| 01   | USBD5V           | 3V3           | 02   |
| 03   | USBD5V           | PI SDA        | 04   |
| 05   | GND              | PI SCL        | 06   |
| 07   | RS232 RX         | SYNC IN JBRX1 | 08   |
| 09   | RS232 TX         | GND           | 10   |
| 11   | nRST             | GPIO 0        | 12   |
| 13   | GND              | GPIO 1        | 14   |
| 15   | JBCANRX DP13     | CS1           | 16   |
| 17   | JBCANTX DP12     | 3V3           | 18   |
| 19   | GND              | MOSI 1        | 20   |
| 21   | BSS LOGGER       | MISO 1        | 22   |
| 23   | MSS LOGGER JBTX1 | SPICLK 1      | 24   |
| 25   | PMIC CLKOUT SOP2 | GND           | 26   |
| 27   | SYNC OUT SOP1    | nERRIN        | 28   |
| 29   | GND              | nERR OUT      | 30   |
| 31   | WARMRST          | GPIO 2        | 32   |

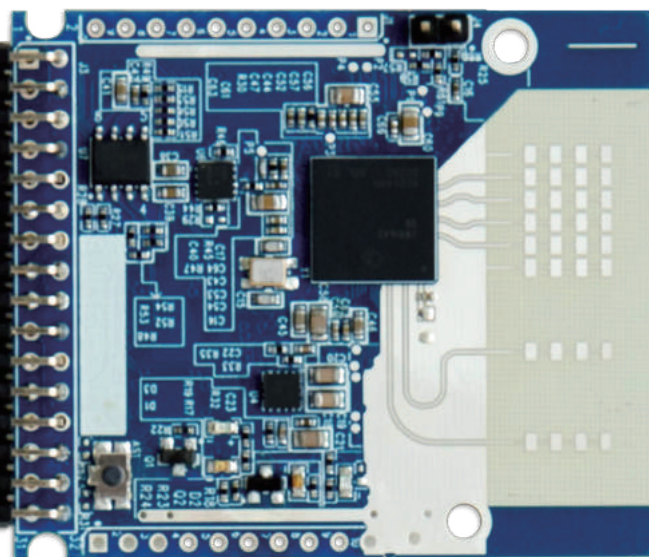

# Batman BM101 mmWave EVM kit

## mmWAVE SENSOR EVALUATION SOLUTION

### mmWAVE SENSOR EVALUATION SOLUTION

## mmWave Pin Assignment

### J1 Pin Assignment

| Pin No | Name     | Pin Type | Function Description |
|--------|----------|----------|----------------------|
| 01     | GND      | GROUND   | Digital ground       |
| 02     | ANATEST1 | O        | ADC Channel 1        |
| 03     | ANATEST2 | O        | ADC Channel 2        |
| 04     | DP0      | IO       | General-purpose I/O  |
| 05     | DP1      | IO       | General-purpose I/O  |
| 06     | DP2      | IO       | General-purpose I/O  |
| 07     | DP3      | IO       | General-purpose I/O  |
| 08     | DP4      | IO       | General-purpose I/O  |
| 09     | DP5      | IO       | General-purpose I/O  |
| 10     | DP6      | IO       | General-purpose I/O  |

### J2 Pin Assignment

| Pin No | Name       | Pin Type | Function Description                                                                          |
|--------|------------|----------|-----------------------------------------------------------------------------------------------|
| 01     | DP7        | IO       | General-purpose I/O                                                                           |
| 02     | MCUCLKOUT  | O        | Programmable clock given out to external MCU or the processor                                 |
| 03     | HOSTINTR1  | O        | Out of Band Interrupt to an external host communicating over SPI                              |
| 04     | DMM SYNC   | I        | Debug Interface(Hardware In Loop) - Sync                                                      |
| 05     | DMM CLK    | I        | Debug Interface(Hardware In Loop) - Clock                                                     |
| 06     | DP8        | IO       | General-purpose I/O                                                                           |
| 07     | VSENSE     | IO       | ADC Channel 6                                                                                 |
| 08     | OSC CLKOUT | O        | Reference clock output from clocking sub system after cleanup PLL(1.8V output voltage swing). |
| 09     | ANAMUX     | IO       | ADC Channel 5                                                                                 |
| 10     | GND        | GROUND   | Digital ground                                                                                |

# Batman BM101 mmWave EVM kit

## mmWAVE SENSOR EVALUATION SOLUTION

### mmWAVE SENSOR EVALUATION SOLUTION

#### J3 Pin Assignment

| Pin No | Name             | Pin Type | Function Description                                                                                                                                                                           |
|--------|------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 01     | USBD5V           | I        | USB POWER DC 5V Input                                                                                                                                                                          |
| 02     | 3V3              | O        | For measurement only                                                                                                                                                                           |
| 03     | USBD5V           | I        | USB POWER DC 5V Input                                                                                                                                                                          |
| 04     | SDA              | IO       | I2C Pin                                                                                                                                                                                        |
| 05     | GND              | GROUND   | Digital ground                                                                                                                                                                                 |
| 06     | SCL              | IO       | I2C Pin                                                                                                                                                                                        |
| 07     | RS232 RX0        | I        | UART A Receive                                                                                                                                                                                 |
| 08     | SYNC IN JBRX1    | I        | Low frequency Synchronization signal input, UART B Receive                                                                                                                                     |
| 09     | RS232 TX0        | O        | UART A Transmit                                                                                                                                                                                |
| 10     | GND              | GROUND   | Digital ground                                                                                                                                                                                 |
| 11     | nRST             | I        | Power on reset for chip. Active low                                                                                                                                                            |
| 12     | GOIO 0           | IO       | Select KeyData or RawData                                                                                                                                                                      |
| 13     | GND              | GROUND   | Digital ground                                                                                                                                                                                 |
| 14     | GPIO 1           | I        | Reserved                                                                                                                                                                                       |
| 15     | JBCANRX DP13     | I        | CanRx                                                                                                                                                                                          |
| 16     | CS1              | IO       | SPI Channel A - chip Select                                                                                                                                                                    |
| 17     | JBCANTX DP12     | O        | CanTx                                                                                                                                                                                          |
| 18     | 3V3              | O        | For measurement only                                                                                                                                                                           |
| 19     | GND              | GROUND   | Digital ground                                                                                                                                                                                 |
| 20     | MOSI 1           | IO       | SPI Channel A - Master Out Slave In                                                                                                                                                            |
| 21     | BSS LOGGER       | IO       | BSS LOGGER                                                                                                                                                                                     |
| 22     | MISO 1           | IO       | SPI Channel A - Master In Slave Out                                                                                                                                                            |
| 23     | MSS LOGGER JBTX1 | O        | UART B Transmit                                                                                                                                                                                |
| 24     | SPICLK 1         | IO       | SPI Channel A - Clock                                                                                                                                                                          |
| 25     | SOP2             | I        | SOP2                                                                                                                                                                                           |
| 26     | GND              | GROUND   | Digital ground                                                                                                                                                                                 |
| 27     | SOP1             | I        | SOP1                                                                                                                                                                                           |
| 28     | nERRIN           | I        | Failsafe input to the device. Nerror output from any other device can be concentrated in the error signaling monitor module inside the device and appropriate action can be taken by Firmware. |
| 29     | GND              | GROUND   | Digital ground                                                                                                                                                                                 |
| 30     | nERR OUT         | O        | Open drain fail safe output signal. Connected to PMIC/ Processor/MCU to indicate that some severe criticality fault has happened. Recovery would be through reset.                             |
| 31     | WARMRST          | IO       | Mistake Proofing Pin                                                                                                                                                                           |
| 32     | GPIO2            | O        | LED Indicator                                                                                                                                                                                  |




# Batman BM101 mmWave EVM kit

mmWAVE SENSOR EVALUATION SOLUTION

mmWAVE SENSOR EVALUATION SOLUTION

## mmWave Raspberry Pi Hat Pin Assignment

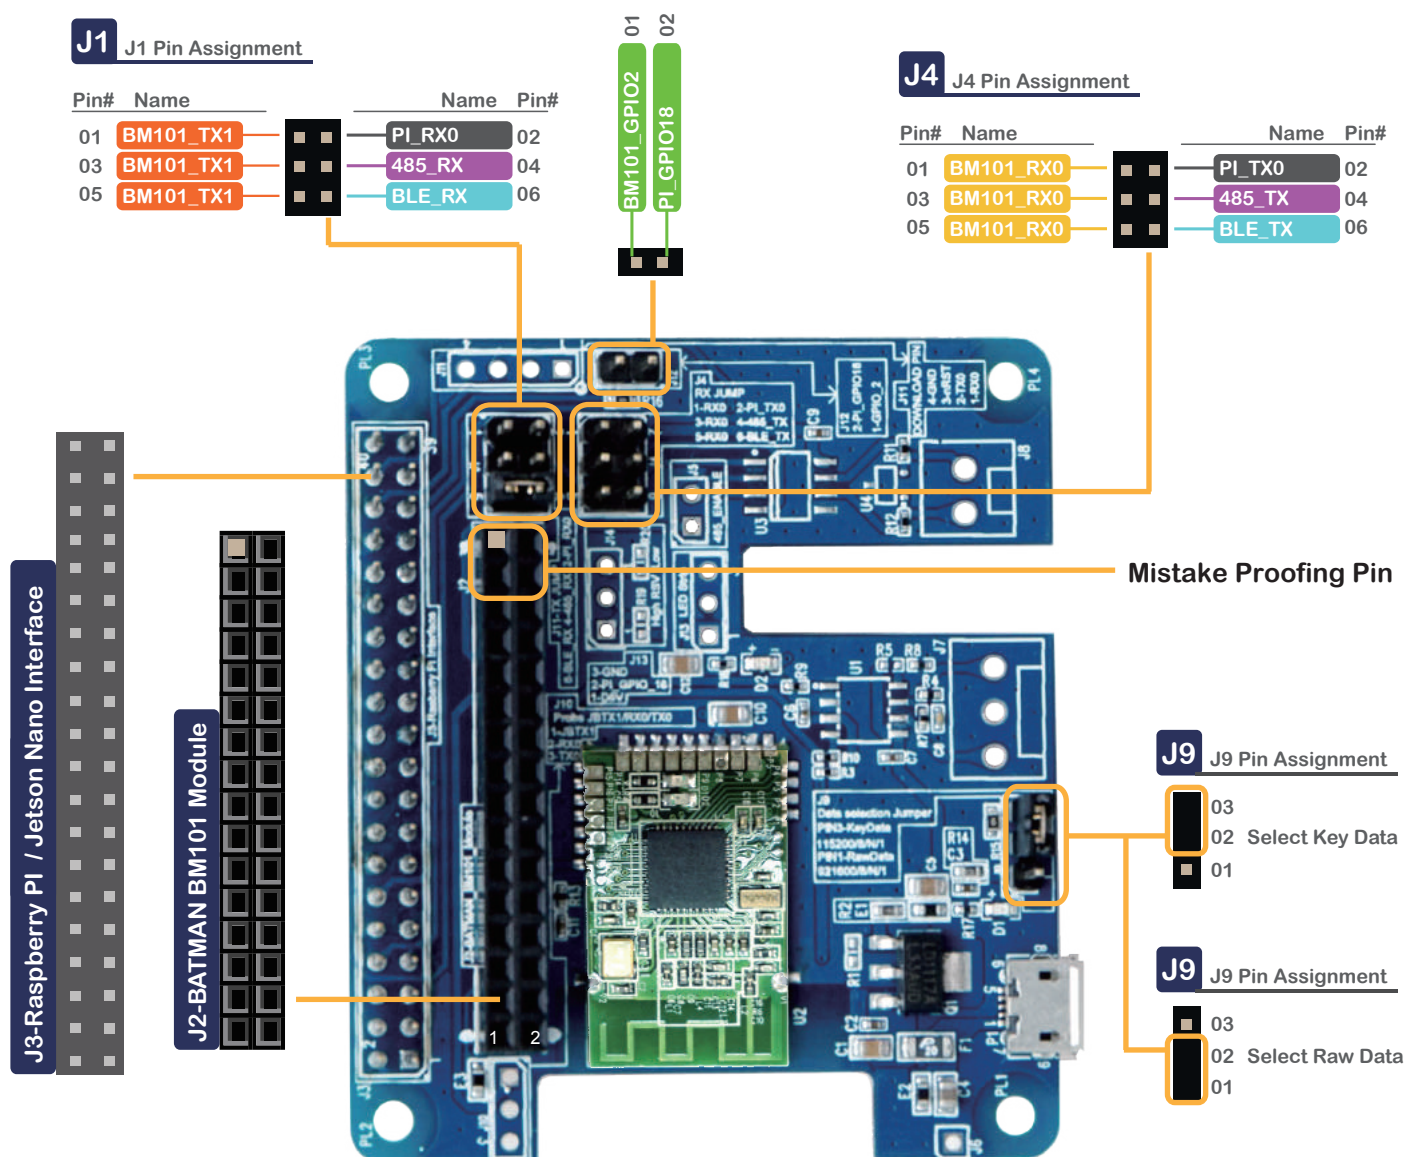


# Batman BM101 mmWave EVM kit

mmWAVE SENSOR EVALUATION SOLUTION

## mmWAVE SENSOR EVALUATION SOLUTION

### Product Dimensions

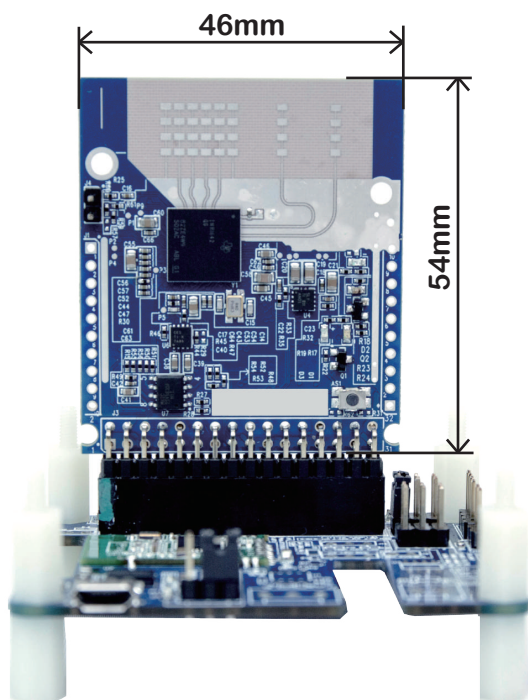

Copyright ©2020 , Joybien Technologies Co., Ltd.

Joybien reserves the right to make changes without further notice to and products herein. Joybien makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Joybien assume any liability arising out of the application or use of any product or circuit. Joybien's products are not to be used in life support devices or systems, if a failure of an Joybien's product can reasonably be expected to cause the failure of that life support device or system, or to affect the safety or effectiveness of that device or system.

For the latest version of this document, visit our website:

[www.joybien.com](http://www.joybien.com)



**Note:**

NVIDIA logo, and Jetson Nano are trademarks and/or registered trademarks of NVIDIA Corporation.

Raspberry Pi logo and Raspberry Pi 4 are trademarks and/or registered trademarks of Raspberry Pi Foundation.


Apple logo, iPhone, iPad, and iOS are trademarks and/or registered trademarks of Apple Inc.

"Python" is a registered trademark of the PSF.

This EVM Kit does not include Apple iPhone/iPad, Raspberry Pi computer, nor NVIDIA Jetson Nano computer.

## Appendix : Joybien mmWave EVM Kit Application Solution Selection

|                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p><b>(BM101-VSD)</b><br/>Vital Signs Detection</p>      | <p>For a contactless and wearableless human Vital Signs Detection (VSD) with real-time Heartbeat Rate &amp; Respiration Rate data, for range of 30cm ~ 90cm (about 1~3 feet); along with Status Indicator for sensing the presence of a person, as well as the measurement stability, and whether the person is present but without Vital Signs.</p>  |
|  <p><b>(BM101-HAM)</b><br/>High Accuracy Measurement</p>  | <p>For a wireless High Accuracy Measurement (HAM) of an object distance with range of 30cm ~ 3 meters (about 1~10 feet), having millimeter measurement resolution.</p>                                                                                                                                                                                |
|  <p><b>(BM101-PMB)</b><br/>People Movement Behavior</p>  | <p>For a wireless People Movement Behavior (PMB) detection in 4 x 4 meter or 16 meter square area (or about 172 square feet); and with software that could set virtual geo-fence(s) to trigger alert or action when People are moving into the geo-fence(s).</p>                                                                                      |
|  <p><b>(BM101-SRR)</b><br/>Short Range Radar</p>        | <p>For Short Range Radar (SRR) detection of human in 1 meter ~ 20 meters (about 3 ~ 66 feet), or detection of vehicle in 1 meter ~ 50 meters (about 3 ~ 164 feet), along with viewing angle of 120 degrees; along with Doppler Data to distinguish for whether the objects are moving-towards or moving-away from the mmWave sensor.</p>              |
|  <p><b>(BM101-ZOD)</b><br/>Zone Occupancy Detection</p> | <p>For plotting a Range-Azimuth-Heatmap with a 64 x48 Grid Matrix covering: Range of 3meter/64row (approx. 0.047meter per row) x Azimuth of 120degree/48column (approx. 2.5degree/column). Subsequently a programmer may write a program to group the Grid(s) into Zone(s) for detecting whether the particular Zone(s) is occupied by Target(s).</p> |



**(BM201-LPD)**  
Long-Range People Detection

For a contactless and wearableless Long-Range People Detection (LPD) of 1 meter ~ 50 meters (about 3 ~ 164 feet), for various applications that require people sensing or counting without privacy invasion.



**(BM201-TMD)**  
Traffic Monitoring Detection

For detecting moving objects (such as vehicles) in 5m ~ 50m with FOV of approx. +/- 54 degrees with Position X&Y, Velocity X&Y info. And based on the detected data, a programmer may write a program to define virtual Zones, for mapping objects (vehicles) moving in and out of certain Zones for traffic monitoring applications.



**(BM201-VSD)**  
Vital Signs Detection

For a contactless and wearableless human Vital Signs Detection (VSD) with real-time Heartbeat Rate & Respiration Rate data, for range of 30cm ~ 90cm (about 1~3 feet); along with Status Indicator for sensing the presence of a person, as well as the measurement stability, and whether the person is present but without Vital Signs.



**(BM301-FDS)**  
Fall Detection Sensing

For the wireless detection of People in 3-Dimensional movement from -3 meter ~ +3 meter on one direction, and -3 meter ~ + 3 meter on the perpendicular/orthogonal direction, and +3 meter from ceiling to ground, all with the respect to the mmWave Sensor positioned in the center of the ceiling; and thus, the Sensor is capable to detect and track people movement along with standing, sitting, lying down positions