

Batman BM502

BATMAN BM502 mmWAVE SENSOR MODULE

BATMAN BM502 mmWAVE SENSOR MODULE

Joybien Batman BM502 mmWave Sensor Module is a Texas Instruments (TI) IWR6843AOP ASIC based millimeter-wave (mmWave) Module with Frequency-Modulated Continuous Wave (FMCW) radar technology capable of operation in the 60GHz to 64GHz band with up to 4 GHz continuous chirp, using 3 Transmission Antennas and 4 Receiving Antennas, for sensing target object's range, velocity, and angle parameters. Batman BM502 mmWave Sensor Module is an extremely light and compact mmWave Module with low-power, self-monitored, ultra-accurate, and lighting condition independent versatilities for various applications including: Education, Engineering, Science, Industrial, Medical, and Business & Consumer.

Applications

- Education's Practical Radar Introduction
- Engineering & Science's Motion Detection, Displacement, etc.
- Industrial sensor for Displacement & Safe Guard, Factory Automation, Robotics, etc.
- Building Automation sensor for Occupancy Detection, Proximity & Position sensing, People Counting, People Density, Security and Surveillance,
- Healthcare's Vital Signs Detection, People Fall Detection, etc.
- Business' Traffic Monitoring, Parking Space occupancy and Proximity Advertisement
- Consumer's Gesture Recognition, Obstacle Avoidance, etc.

Features

- Operating Frequency: 60GHz ~ 64GHz coverage
with 4GHz continuous bandwidth
- Antenna: 3 Tx and 4 Rx Antenna on Package (AOP), with:
TX Power: 15 dBm
RX Noise Figure: 9 dB
(Phase Noise at 1 MHz: -92 dBc/Hz)
- Processors: ARM R4F based MCU, and C674x DSP
for advanced signal processing
- On-Chip Memory: 1.75MB
- Internal Memories With ECC
- Integrated Peripherals
- Extremely light and compact Module design.
- Supplied Voltage: 5VDC & 1.5A


Batman BM502

BATMAN BM502 mmWAVE SENSOR MODULE

BATMAN BM502 mmWAVE SENSOR MODULE

Specifications

mmWave Sensor Evaluation Module

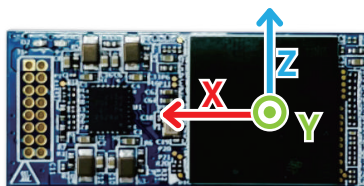

mmWave ASIC	TI IWR6843AOP Single Chip mmWave Sensor
FMCW Transceiver	<ul style="list-style-type: none"> ● Integrated PLL, Transmitter, Receiver, Baseband, and A2D ● 60GHz to 64GHz Coverage With 4GHz Continuous Bandwidth ● Four Receive Channels ● Three Transmit Channels ● Ultra-Accurate Chirp Engine Based on Fractional-N PLL ● TX Power: 15 dBm ● RX Noise Figure: 9 dB ● Phase Noise at 1 MHz: -92 dBc/Hz ● Antenna Type : Antenna On Package(AOP)
Built-in Calibration and Self-Test (Monitoring)	<ul style="list-style-type: none"> ● ARM® Cortex® -R4F-Based Radio Control System ● Built-in Firmware (ROM) ● Self-calibrating System Across Frequency and Temperature
DSP	<ul style="list-style-type: none"> ● C674x DSP for Advanced Signal Processing
On-Chip Memory	<ul style="list-style-type: none"> ● 1.75MB
MCU	<ul style="list-style-type: none"> ● ARM R4F Microcontroller for Object Detection, and Interface Control ● Joybien mmWave Protocol (Per configuration)
I/O	<ul style="list-style-type: none"> ● UART x 2 ● GPIO x 2(GPIO_31,GPIO_32)
Power Management	<ul style="list-style-type: none"> ● Built-in LDO Network for Enhanced PSRR ● I/Os Support Dual Voltage 3.3 V
Clock Source	40MHz
Antenna Orientation	4 receive(RX) 3 transmit (TX) antenna with 120° azimuth field of view (FoV) and 120° elevation FoV
Input Power	5VDC, 1.5A source
Operating Temperature & Humidity	0°C ~ 40°C 10% ~ 85% Non-Condensing
Dimensions & Weight	37.4mm x 16mm x 3.1mm ; 3 grams net


Batman BM502

BATMAN BM502 mmWAVE SENSOR MODULE


BATMAN BM502 mmWAVE SENSOR MODULE

mmWave Pin Assignment

J1 J1 Pin Assignment

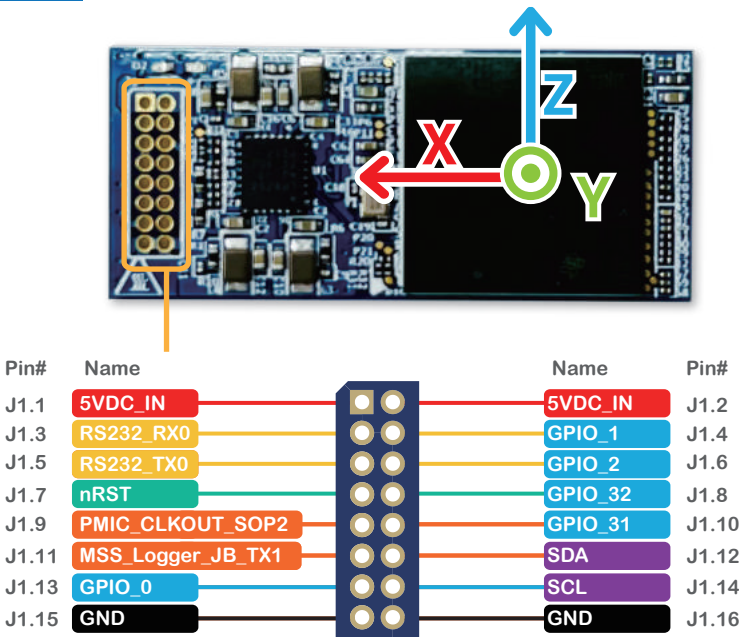

Product Dimensions

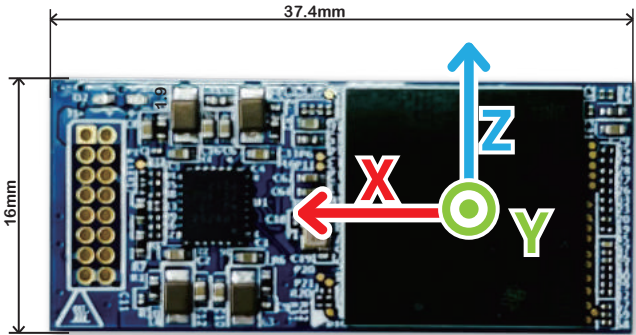

Batman BM502

BATMAN BM502 mmWAVE SENSOR MODULE

BATMAN BM502 mmWAVE SENSOR MODULE

J1 Pin Assignment

Pin No	Name	Pin Type	Function Description
J1.1	5VDC_IN	I	POWER 5VDC Input
J1.2	5VDC_IN	I	POWER 5VDC Input
J1.3	RS232 RX0	I	UART A Receive
J1.4	GPIO_1	I	Reserved
J1.5	RS232 TX0	O	UART A Transmit
J1.6	GPIO_2	O	LED Indicator
J1.7	nRST	I	Power on reset for chip. Active low
J1.8	GPIO_32	IO	GPIO Pin
J1.9	SOP2	I	SOP2
J1.10	GPIO_31	IO	GPIO Pin
J1.11	MSS_LOGGER_JB_TX1	O	UART B Transmit
J1.12	SDA	IO	GPIO Pin
J1.13	GPIO_0	I	Select KeyData or RawData
J1.14	SCL	IO	GPIO Pin
J1.15	GND	GROUND	Digital ground
J1.16	GND	GROUND	Digital ground

Copyright ©2023 , Joybien Technologies Co., Ltd.

Joybien reserves the right to make changes without further notice to and products herein. Joybien makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Joybien assume any liability arising out of the application or use of any product or circuit. Joybien's products are not to be used in life support devices or systems, if a failure of an Joybien's product can reasonably be expected to cause the failure of that life support device or system, or to affect the safety or effectiveness of that device or system.

For the latest version of this document, visit our website:
www.joybien.com



Note:

Please contact us at Joybien in advance for BM502 commercial application for mass production.