Batman BM501

BATMAN BM501 mmWAVE SENSOR MODULE

BATMAN BM501 mmWAVE SENSOR MODULE

Joybien Batman BM501 mmWave Sensor Module is a Texas Instruments (TI) IWR6843AOP ASIC based millimeter-wave (mmWave) Module with Frequency-Modulated Continuous Wave (FMCW) radar technology capable of operation in the 60GHz to 64GHz band with up to 4 GHz continuous chirp, using 3 Transmission Antennas and 4 Receiving Antennas, for sensing target object's range, velocity, and angle parameters.

Batman BM501 mmWave Sensor Module is an extremely light and compact mmWave Module with low-power, self-monitored, ultra-accurate, and lighting condition independent versatilities for various applications including: Education, Engineering, Science, Industrial, Medical, and Business & Consumer.

Applications

- Education's Practical Radar Introduction
- Engineering & Science's Motion Detection, Displacement, etc.
- Industrial sensor for Displacement & Safe Guard, Factory Automation, Robotics, etc.
- Building Automation sensor for Occupancy Detection, Proximity & Position sensing, People Counting, People Density, Security and Surveillance,
- Healthcare's Vital Signs Detection, People Fall Detection, etc.
- Business' Traffic Monitoring, Parking Space occupancy and Proximity Advertisement
- Consumer's Gesture Recognition, Obstacle Avoidance, etc.

Features

- Operating Frequency: 60GHz ~ 64GHz coverage
                                    with 4GHz continuous bandwidth
- Antenna: 3 Tx and 4 Rx Antenna on Package (AOP), with:
          TX Power: 15 dBm
          RX Noise Figure: 9 dB
- Processors: ARM R4F based MCU, and C674x DSP
               for FMCW signal processing
- On-Chip Memory: 1.75MB
- Internal Memories With ECC
- Integrated Peripherals
- Extremely light and compact Module design.
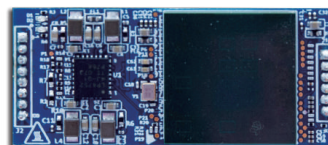- Supplied Voltage: 5VDC & 1.5A

Batman BM501

BATMAN BM501 mmWAVE SENSOR MODULE

mmWAVE SENSOR EVALUATION SOLUTION

Specifications

mmWave Sensor Evaluation Module

| mmWave ASIC	TI IWR6843AOP Single Chip mmWave Sensor
FMCW Transceiver	● Integrated PLL, Transmitter, Receiver, Baseband, and A2D ● 60GHz to 64GHz Coverage With 4GHz Continuous Bandwidth ● Four Receive Channels ● Three Transmit Channels ● Ultra-Accurate Chirp Engine Based on Fractional-N PLL ● TX Power: 15 dBm ● RX Noise Figure: 14 dB ● Phase Noise at 1 MHz: –92 dBc/Hz ● Antenna Type : Antenna On Package(AOP)
Built-in Calibration and Self-Test (Monitoring)	● ARM® Cortex® -R4F-Based Radio Control System ● Built-in Firmware (ROM) ● Self-calibrating System Across Frequency and Temperature
DSP	● C674x DSP for Advanced Signal Processing
On-Chip Memory	● 1.75MB
MCU	● ARM R4F Microcontroller for Object Detection, and Interface Control ● Joybien mmWave Protocol (Per configuration)
I/O	● UART x 2 ● GPIO x 2(GPIO_31,GPIO_32)
Power Management	● Built-in LDO Network for Enhanced PSRR ● I/Os Support Dual Voltage 3.3 V
Clock Source	40MHz
Antenna Orientation	4 receive(RX) 3 transmit (TX) antenna with 120° azimuth field of view (FoV) and 120° elevation FoV
Input Power	5VDC, 1.5A source
Operating Temperature & Humidity	0°C ~ 40°C 10% ~ 85% Non-Condensing
Dimensions & Weight	37mm x 16mm x 2.4mm ; 3 grams net

Batman BM501

BATMAN BM501 mmWAVE SENSOR MODULE

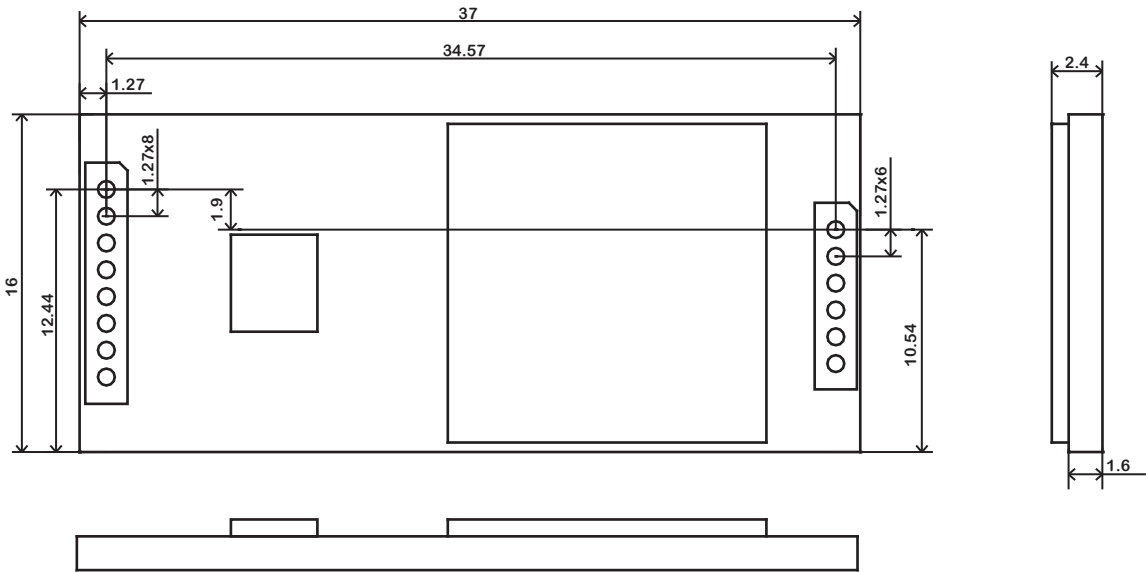BATMAN BM501 mmWAVE SENSOR MODULE

mmWave Pin Assignment

J2 J2 Pin Assignment

Pin#	Name
J2.1	5VDC_IN
J2.2	RS232_RX0
J2.3	RS232_TX0
J2.4	nRST
J2.5	SOP2
J2.6	MSS_Logger_JB_TX1
J2.7	GPIO_0
J2.8	GND
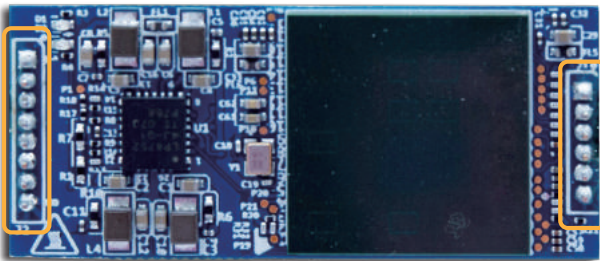
J1 J1 Pin Assignment

Name	Pin#
TBD,3V3DC_OUT	J1.1
GPIO_31	J1.2
GPIO_32	J1.3
GPIO_2	J1.4
GPIO_1	J1.5
GND	J1.6

Product Dimensions

Batman BM501

BATMAN BM501 mmWAVE SENSOR MODULE

J1 Pin Assignment

Pin No	Name	Pin Type	Function Description
J1.1	TBD,3V3DC_OUT	O	TBD
J1.2	GPIO_31	IO	GPIO Pin
J1.3	GPIO_32	IO	GPIO Pin
J1.4	GPIO_2	O	LED Indicator
J1.5	GPIO_1	I	Reserved
J1.6	GND	GROUND	Digital ground

J2 Pin Assignment

Pin No	Name	Pin Type	Function Description
J2.1	5VDC_IN	I	POWER 5VDC Input
J2.2	RS232 RX0	I	UART A Receive
J2.3	RS232 TX0	O	UART A Transmit
J2.4	nRST	I	Power on reset for chip. Active low
J2.5	SOP2	I	SOP2
J2.6	MSS_LOGGER_JB_TX1	O	UART B Transmit
J2.7	GPIO_0	I	Select KeyData or RawData
J2.8	GND	GROUND	Digital ground

Batman BM501

BATMAN BM501 mmWAVE SENSOR MODULE

Product Dimensions
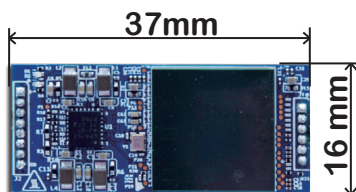
37mm

16 mm

For the latest version of this document, visit our website:
www.joybien.com

Note:
Please contact us at Joybien in advance for BM501 commercial application for mass production.