

**聚羧宝**

# 聚羧宝科技有限公司

**JSB Technology Co., Ltd.**



聚羧酸母液生产设备 · 混凝土外加剂 · 混凝土一站式解决方案  
PCE Production Equipment · Concrete Admixture · Concrete One-Stop Solution

## ▶ 公司简介

聚羧宝科技有限公司成立于2014年，隶属于钢都集团，公司致力于先进聚羧酸外加剂合成设备的研发、制造及外加剂的生产。通过与日本聚羧酸技术先进企业合作，开发了国内领先的聚羧酸减水剂常温合成技术。该技术采用全封闭式生产，实现三废零排放，符合当今社会倡导的环保、节能、绿色生产的理念；用低温催化剂取代传统技术中锅炉加热设备，常温即可反应，与以往的减水剂生产设备相比，性能更优越，投资、能耗、人力成本大大降低，受到国内外客户的青睐。

## ▶ Company Introduction

JSB Technology Co., Ltd. was established in 2014, which is a subsidiary of Gangdu Group, the company committed to advanced polycarboxylate based admixture synthesis equipment research, development and admixture production. Through cooperation with the Japanese polycarboxylate superplasticizer technology leader, developed domestic leading technology of PCE synthesis at room temperature. The technology adopt full-obtured production, to achieve zero emissions of three industrial wastes waste water, waste gas, waste residue, in line with the concept of environmental protection; Low-temperature catalyst to replace the boiler heating equipment. The module is better performance, investment, energy consumption and labor costs have been reduced greatly compared with common equipment, and welcomed by domestic and foreign customers.



# 目录

## CONTENTS

- 03** GDPC-5型电控聚羧酸母液生产模块  
GDPC-5 Electrical Control PCE Mother Liquid Production Module
- 05** GDPC-5Z型新款全自动羧酸母液生产模块  
GDPC-5Z Full-Automatic PCE Mother Liquid Production Module
- 07** GDSR-5Z型保坍剂母液生产配套模块  
GDSR-5Z Slump Retaining Agent Mother Liquid Affiliate Production Module
- 08** 混凝土一站式解决方案  
Concrete One-Stop Solution
- 09** 聚羧宝品牌外加剂  
Concrete Admixture From JSB Technology:
- 09** 高性能聚羧酸减水剂母液  
High Performance PCE Mother Liquid
- 10** 聚羧酸型保坍剂  
PCE Slump Retaining Agent





## GDPC-5型电控聚羧酸母液生产模块

GDPC-5 Electrical Control PCE Mother Liquid Production Module

### ◆ 产品简介

GDPC-5型电控聚羧酸母液生产模块是聚羧宝科技有限公司推出的第一代面向减水剂母液厂及商混站设计的全自动生产设备。该设备结构紧凑、移动方便，操作简单、安全、可靠，拥有完善的计量系统、搅拌系统、供料系统、操作控制系统、滴加系统。搅拌效果好，生产效率高，易于维护，是一款非常实用的聚羧酸减水剂生产设备。

### ◆ Product Introduction

GDPC-5 is the first generation of PCE production module present by JSB technology Co., Ltd. Design for PCE mother liquid plant and compound plant. The equipment has compact structure, easy to move and using, safe and reliable, with separate metering system, mixing system, feeding system, controlling system and titration system. Stirring effect is good while production efficiency is high, easy to maintain, it is a very practical PCE mother liquid production equipment.

### ◆ 设备参数 Technical Parameter

|                                                 |                                       |                    |
|-------------------------------------------------|---------------------------------------|--------------------|
| 型号Model                                         |                                       | GDPC-5             |
| 生产率 (吨/批次) Productivity (ton/lot)               |                                       | 5                  |
| 产能Capacity(L/4 hour)                            |                                       | 5000               |
| 合成罐<br>Main<br>Reaction<br>Tank                 | 最大称容积<br>Max Weighing Volume ( L )    | 5300               |
|                                                 | 最大称重值<br>Max Weighing Capacity ( kg ) | 8000               |
|                                                 | 称量精度Weighing Precision                | ± 2%               |
| 中和罐<br>Neutralization<br>Reaction<br>Tank       | 最大容积Max Volume ( L )                  | 250                |
|                                                 | 数量QTY                                 | 1                  |
| 外形尺寸 (长×宽×高)<br>Overall Dimension(D*W*H) ( mm ) |                                       | 3300 × 2000 × 2700 |
| 装机总功率约<br>Total Installed Power ( kw )          |                                       | 20                 |
| 设备自重Equipment Weight (kg)                       |                                       | 1500               |



## ◆特点 Features:

1.低位投料: 采用低位投料方式, 无需搭建高台, 操作人员地面即可投料, 减轻人员的劳动强度

Lower feeding inlet: no need for high-platform, and operating on the ground, reducing working intensity

2.占地空间小: 占地面积仅7平米, 高度仅2.7米, 降低了对厂房高度的要求

Small space occupation: covers an area of only 7 m<sup>2</sup>, 2.7 m height, reducing the height requirements of plant

3.自带高精度传感器: 设备底部装有称重传感器, 原料单独计量, 投料精确快速

In-built high-precision sensor: the module equipped with load cells at the bottom of platform, materials are measured separately, accurate and fast feeding will be achieved.

4.搅拌系统选用蜗杆卧式减速机, 结构先进、运行平稳, 316L不锈钢材质加厚搅拌桨, 搅拌效率高, 噪音小。

Equipped with reducer: mixing system select with worm horizontal reducer, advanced structure, smooth operation, 316L stainless steel thicker mixing paddle bring efficiency and low noise.

5.设备摆放灵活: 整机重量仅为1.5吨, 一辆叉车既可搬运, 无需额外拆卸安装, 设备落地即可生产。

Easy moving: the whole weight is only 1.5 tons, can be carried by a forklift easily, no need for additional installation, and production is available as soon as placing equipment.

6.滴加设备先进: 采用制药行业使用的蠕动泵, 操作简单, 稳定, 滴加更精准。

Advanced titration equipment: the module equipped with peristaltic pump which widely used in the pharmaceutical industry, with stable and accurate trait

7.合成反应快速: 生产5吨聚羧酸母液仅需4小时, 可连续生产。


Short synthetic process time: 5 tons of PCE mother liquid just need 4 hours, and can be continuously produced.

8.生产过程环保: 整个过程无任何噪声和环境污染。

Process is environment-friendly: little noise and no pollution.

9.模块简单易学: 操作简单, 一人即可独立完成生产, 大大节省人力成本。

Easy to learn: simple operation, just one person can complete production independently, significant savings in labor costs.

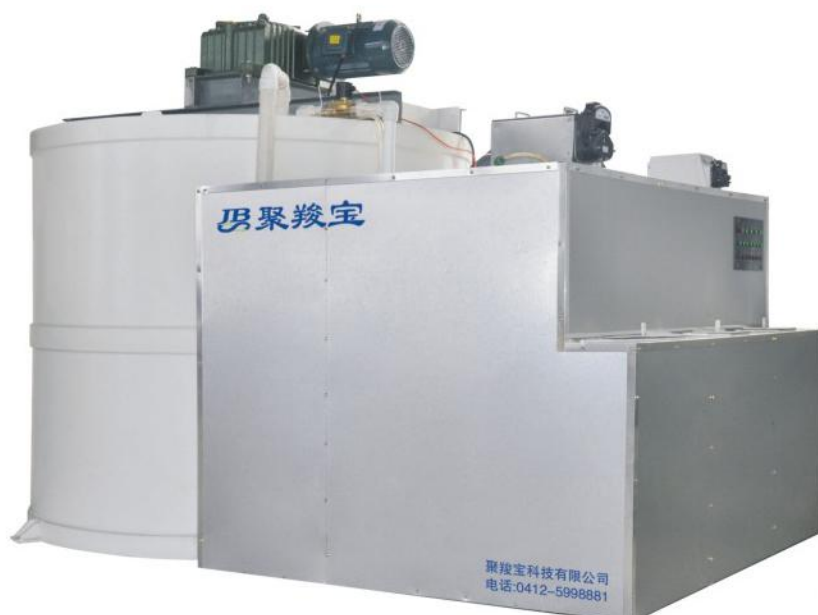

## GDPC-5Z型新款全自动聚羧酸母液生产模块

GDPC-5Z Full-Automatic PCE Mother Liquid Production Module

### ◆ 产品简介

GDPC-5Z型是GDPC-5型的改进型，是聚羧宝科技有限公司推出的第二代聚羧酸母液生产模块。GDPC-5Z型保留了GDPC-5型的优点，同时增加了PLC自控模块，实现一键自动生产，全屏触控面板，全套电气开关，操控更简便，更直观，做工精良，是一款性价比极高的减水剂生产设备

### ◆ Product Introduction

GDPC-5Z improve from is GDPC-5Z, the second generation of PCE mother liquid production module. GDPC-5Z has retained the advantages of GDPC-5Z, while increasing the PLC-controlled module, achieved button start production, full-screen touch panel, a full set of electrical switches, aesthetic appearance, compact design, simple operation, easy maintenance, it is a high cost-effective PCE mother liquid production module.

### ◆ 设备参数 Technical Parameter

|                                             |                                    |                |
|---------------------------------------------|------------------------------------|----------------|
| 型号Model                                     |                                    | GDPC-5Z        |
| 生产率（吨/批次）Productivity (ton/lot)             |                                    | 5              |
| 产能Capacity(L/4 hour)                        |                                    | 5000           |
| 合成罐<br>Main<br>Reaction<br>Tank             | 最大称容积<br>Max Weighing Volume（L）    | 5300           |
|                                             | 最大称重值<br>Max Weighing Capacity（kg） | 8000           |
|                                             | 称量精度Weighing Precision             | ± 2%           |
| 中和罐<br>Neutralization<br>Reaction<br>Tank   | 最大容积Max Volume（L）                  | 260            |
|                                             | 数量QTY                              | 1              |
|                                             | 最大称重<br>Max Weighing Capacity（kg）  | 500            |
|                                             | 称量精度Weighing Precision             | ± 1%           |
| 外形尺寸（长×宽×高）<br>Overall Dimension(D*W*H）（mm） |                                    | 3500×2000×2700 |
| 装机总功率约<br>Total Installed Power（kw）         |                                    | 24             |
| 设备自重Equipment Weight (kg)                   |                                    | 1900           |





## ◆特点 Features:

1. 国内首创PLC控制模块+触屏管理控制方式，具有全自动、手动两种工作模式，界面操控简单，易于掌握，配合公司独立开发的软件，数据管理准确

PLC control module with touch screen panel display, two modes of operation: automatic, and manual system, friendly interface, easy to use, data management accuracy with JSB technology developed software.

2. 低位投料：采用低位投料方式，无需搭建高台，操作人员地面即可投料，减轻人员的劳动强度

Lower feeding inlet: no need for high-platform, and operating on the ground, reducing working intensity

3. 自带高精度传感器：设备底部装有称重传感器，原料单独计量，投料精确快速

In-built high-precision sensor: the module equipped with load cells at the bottom of platform, materials are measured separately, accurate and fast feeding will be achieved.

4. 模块简单易学：操作简单，一人即可独立完成生产，大大节省人力成本。

Easy to learn: simple operation, just one person can complete production independently, significant savings in labor costs.

5. 合成罐选用耐腐蚀的pp材质，经久耐用。化料装置先进，投料顺畅，大功率输料泵+不锈钢泵体，投料速度快，与介质无反应，先进的不锈钢吸料泵，自吸能力强、控制精准

Synthetic tank selection of corrosion-resistant pp material. Advanced material feeding device with high-power feed pump and stainless steel pump body, stainless steel suction pump, good performance.

6. 滴加设备先进：采用制药行业使用的蠕动泵，操作简单，稳定，滴加更精准。

Advanced titration equipment: the module equipped with peristaltic pump which widely used in the pharmaceutical industry, with stable and accurate trait

7. 合成反应快速：生产5吨聚羧酸母液仅需4小时，可连续生产。

Short synthetic process time: 5 tons of PCE mother liquid just need 4 hours, and can be continuously produced.

8. 钢制机身白色喷漆，耐腐蚀，易清理，造型简洁美观。机箱内部设计紧凑合理，便于后期检修

Steel equipment cabinet with painting, corrosion resisting and easy to clean, aesthetic and simple appearance, reasonable and compact internal structure design, simple operation and easy maintenance.

9. 设备摆放灵活：整机重量仅为1.9吨，一辆叉车既可搬运，无需额外拆卸安装，设备落地即可生产。

Easy moving: the whole weight is only 1.9 tons, can be carried by a forklift easily, no need for additional installation, and production is available as soon as placing equipment.

10. 生产过程环保：整个过程无任何噪声和环境污染。

Process is environment-friendly: little noise and no pollution.



## GDSR-5Z型保坍剂母液生产配套模块

GDSR-5Z Slump Retaining Agent Mother Liquid Affiliate Production Module

### ◆ 产品简介

GDSR-5Z型保坍剂母液生产模块是聚羧宝科技有限公司推出的一款与减水剂合成模块组合使用生产保坍剂的设备，形成完整的体系，实现一机多用，满足聚羧酸减水剂母液厂对保坍剂生产的需求。

### ◆ Product Introduction

GDSR-5Z is the first generation slump retaining agent mother liquid production module present by JSB technology Co., Ltd. It can be connected with PCE mother liquid production module, become an integrated system to achieve a multi-purpose, and meeting PCE mother liquid plant's requirement.



### ◆ 设备参数 Technical Parameter

|                                                    |                                       |                    |
|----------------------------------------------------|---------------------------------------|--------------------|
| 型号Model                                            |                                       | GDSR-5Z            |
| 生产率（吨/批次）Productivity (ton/lot)                    |                                       | 5                  |
| 中和罐<br>Neutralization<br>Reaction<br>Tank          | 最大称重值<br>Max Weighing Capacity ( kg ) | 1000               |
|                                                    | 称量精度Weighing Precision                | ± 1%               |
| 外形尺寸（长×宽×高）（mm）<br>Overall Dimension(D*W*H) ( mm ) |                                       | 2500 × 2000 × 1100 |
| 装机总功率约Total Installed Power ( kw )                 |                                       | 3                  |
| 设备重量Equipment Weight (kg)                          |                                       | 500                |
| 产能Capacity(L/6 hour)                               |                                       | 5000               |

### ◆ 特点 Features:

1. 自吸式投料：采用自吸泵投料方式，无需人力投料，减轻人员的劳动强度  
Self-priming feed: no need to for manpower, reducing working intensity
2. 自带高精度传感器：设备底部装有称重传感器，原料单独计量，投料精确快速  
In-built high-precision sensor: the module equipped with load cells at the bottom of platform, materials are measured separately, accurate and fast feeding will be achieved.
3. 模块简单易学：操作简单，一人即可独立完成生产，大大节省人力成本。  
Easy to learn: simple operation, just one person can complete production independently, significant savings in labor costs.
4. 设备摆放灵活：整机重量仅为0.5吨，可轻松搬运，无需额外拆卸安装。  
Easy moving: the whole weight is only 0.5 tons, can be carried easily, no need for additional installation.
5. 生产过程环保：整个过程无任何噪声和环境污染。  
Process is environment-friendly: little noise and no pollution.



## 混凝土一站式解决方案 Concrete One-Stop Solution

聚羧宝科技有限公司依托集团下属的三家水泥公司和两家混凝土公司多年积累的数据，整合外加剂公司母液生产数据和经验丰富的外加剂技术团队，从骨料砂石、粉料水泥、粉煤灰、矿粉等原料入手，调整外加剂复配方案，对混凝土生产过程中出现的各种问题可以为客户提供一站式解决方案。

技术团队到现场实地了解情况，从客户的角度出发，从上游原料开始，优化商混站的整体资源配置，利用聚羧宝的设备、外加剂和生产工艺，可显著提高泵送剂产率，同时技术团队将按照终端客户的需求量身定制，为商混站推荐最优配合比，在各项指标不变的前提下，节省水泥、外加剂等基本原材料的使用量，降低商混站的综合成本，部分商混站可节省5%的综合成本。

JSB Technology Co., Ltd. integrate the data which accumulated from our group's three cement companies, two concrete company and one mother liquid plant with experienced concrete technical team, start from aggregate, sand, cement, flyash, slag and so on, adjust the admixture compound design, and supply one-stop solution of all concrete problems that appears in production process for customers.

Technical team will interview concrete batching plant on the ground, starting from the upstream raw materials to optimize the overall resources of concrete batching plant, the by using equipment, admixtures and technology which from JSB Technology Co., Ltd., and significantly improve the yield of pumping agent. Then the technical team will recommend the best mixing proportion in accordance with the needs of end customers, saving cement, admixture and other basic raw materials, reducing the comprehensive cost of concrete batching plant at least 5%.



## 聚羧宝品牌外加剂 Concrete Admixture From JSB Technology

### 高性能聚羧酸减水剂母液 High Performance PCE Mother Liquid

#### ◆ 产品特性

- 1.高减水率：极好的分散性饱和掺量时高达40%以上的减水率，为改善混凝土工作性能、提高混凝土强度、节约水泥提供了保证。
- 2.较好的保坍性：可很好的延长混凝土的运输时间和工地的滞留时间，保证了混凝土的可泵送施工性能。
- 3.高强度增长率：较高的早期强度增长率，改善收缩性能和降低混凝土的碳化率。
- 4.良好的适应性：对各种硅酸盐水泥、普通硅酸盐水泥、矿渣硅酸盐水泥及各种掺合料均具有较好的分散性及保塑性。
- 5.绿色环保：无甲醛及其他有害成分。
- 6.低能耗、低成本：反应周期短，能耗小，因而成本较低。非常适合商品混凝土搅拌站应用。

#### ◆ Product Features

- 1.High water reduction rate: excellent dispersion and saturation, water reduction rates up to 40%, it provides a guarantee that improving the workability and the strength of concrete, meanwhile saving cement.
- 2.Good slump retaining performance: effectively extend the transport time of concrete and the residence time at building site, and keep the pumpability and constructability.
- 3.High strength growth rate: higher early strength growth rate, improved shrinkage performance and reduced carbonation rate of concrete.
- 4.Good adaptability: good dispersion and plasticity all kinds of Portland cement, ordinary Portland cement, slag Portland cement.
- 5.Green: no formaldehyde and other harmful ingredients.
- 6.Low energy consumption, low cost: short reaction cycle, low energy consumption, and thus lower cost. Very suitable for concrete mixing plant.

#### ◆ 产品指标 Production Index

| 项目Item                           | 单位Unit            | 标准Specification                     |
|----------------------------------|-------------------|-------------------------------------|
| 外观Appearance                     | /                 | 淡黄色粘稠液体<br>Yellowish Viscous Liquid |
| 密度Density                        | g/cm <sup>3</sup> | 1.0                                 |
| PH                               | %                 | 6.5~8.5                             |
| 含固量 Solid Content                | %                 | 40                                  |
| Cl <sup>-</sup>                  | %                 | ≤0.01                               |
| Na <sub>2</sub> SO <sub>4</sub>  | %                 | ≤0.2                                |
| 水泥净浆流动度<br>Cement Paste Fluidity | mm                | ≥250                                |

#### ◆ 包装及贮存 Packaging And Storage

本产品液体为200Kg、1000Kg桶装密封。  
200kg drum, IBC TANK, Flexi bag  
避免阳光直晒，在0℃-35℃的环境中存放。  
Please keep it in a cool dry place between 0℃-35℃, avoid direct sunlight.  
保质期为六个月，  
超过保质期要通过试验合格后方可使用。  
Shelf life: six months,  
test before being used if over six months.



## 聚羧酸型保坍剂 PCE Slump Retaining Agent

### ◆ 产品简介

为我公司研发的新一代环保型聚羧酸高性能保坍剂，具有显著的缓释性，对低坍落度混凝土、坍落度损失快的混凝土极为有利，可以大大提高混凝土的保塑效果。本产品无毒、无腐蚀性、不易燃、对钢筋无锈蚀、对人体健康无害。

### ◆ Product Introduction

It is a new generation of environmental friendly high-performance polycarboxylate based slump retaining agent, it has a significant sustained-release performance, and extremely beneficial for low slump and quick slump loss concrete, it can greatly improve the concrete of the plastic effect. No toxic, non-corrosive, non-flammable, no corrosion of steel, harmless to human health.

### ◆ 产品特性

1. 优异的保坍性：能有效抑制水泥水化初期和诱导期的水化反应速度。
2. 缓释性：该保坍剂具有前期减水率低，后期减水率高的特点。对水泥有优秀的缓释分散性。
3. 高强度增长率，且有较高的早期强度增长率。克服了一般缓凝剂使混凝土凝结时间过长，早期强度发展过慢的缺点。
4. 良好的适应性：它可以广泛应用于普通混凝土、泵送混凝土、超流态自密实以及高强度耐久性混凝土中。特别对核电、桥梁、地铁预制管片要求的低坍落度混凝土、预拌商品混凝土长距离运输的坍落度、流动度的时损失能有效控制，使混凝土在所要求的时间内保持良好的可泵送性和施工性能。

### ◆ Features

1. Slump retaining performance: can effectively inhibit the hydration reaction rate during initial and induction period.
2. Sustained release: it has the characteristics of low water reduction rate during initial period and high water reduction rate during later period.
3. High intensity growth rate: higher early strength growth rate, overcoming long setting time, slow early strength of the development.
4. Good adaptability: it can be widely used in ordinary concrete, pumping concrete, super-flow self-dense and high-strength durability of concrete. Especially for nuclear power, bridges, subway prefabricated pipe which require low slump concrete, ready-mixed concrete that need long-distance transport, the flow of the loss can be effectively controlled, so that keep the concrete in good pumpability and constructability in the required time.

### ◆ 产品指标

#### Production Index

| 项目Item              | 标准specification                        |
|---------------------|----------------------------------------|
| 外观Appearance        | 淡黄色粘稠液体<br>Yellowish<br>Viscous Liquid |
| 密度Density (g/cm3)   | 1.05-1.10                              |
| PH                  | 6.5-8.5                                |
| 含固量/%solid content  | 40                                     |
| Cl-(%)              | ≤0.1                                   |
| 碱含量alkali content/% | ≤0.5                                   |

### ◆ 包装及贮存

#### Packaging And Storage

本产品液体为200Kg、1000Kg桶装密封。  
200kg drum, IBC TANK, Flexi bag  
避免阳光直晒，在0℃—35℃的环境中存放。  
Please keep it in a cool dry place between 0℃—35℃,  
avoid direct sunlight.  
保质期六个月，超过保质期要通过试验合格后方可使用。  
Shelf life:six months, test before being used if over six months.



# 聚羧酸母液生产设备 领先者

Advanced Polycarboxylate Superplasticizer Equipment Forthgoer

手机: 13904124199 13841937486

电话: 0412-5998881

邮箱: jsbtech@163.com

地址: 辽宁省鞍山市达道湾经济开发区钢西路202号

网址: www.jusuobao.net



公司网址



微信公众号

Mobile: +86-13841937486

Tel: +86-412-5998881

Whatsapp: +86-13841937486

E-mail: jsbtech@163.com

Add: No. 202 Angang West Road, Dadaowan Economic Development Zone,  
Anshan City Liaoning Province, China 114000

web: www.jusuobao.net



website

