


CUSTOMER APPROVE BY:

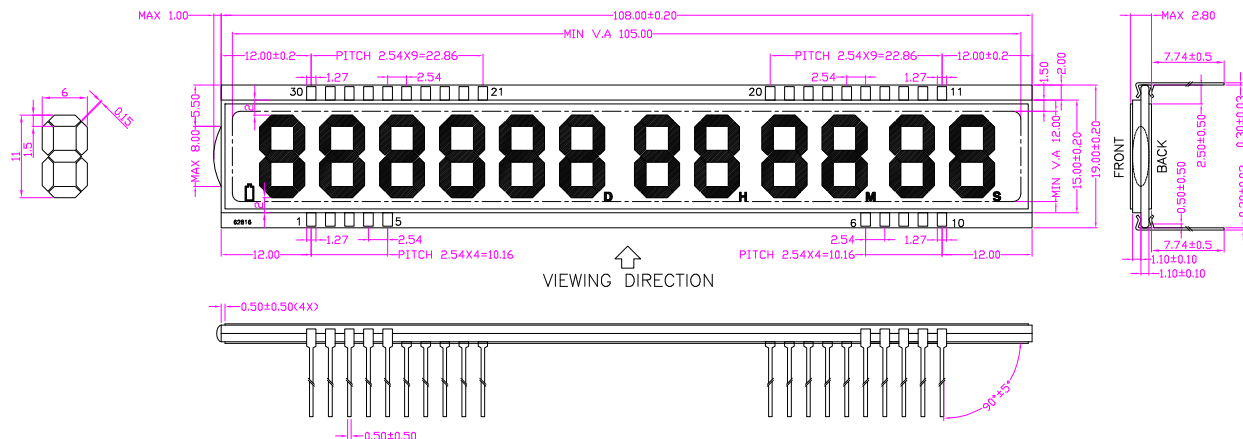


分段图

CHARACTERISTICS :


1. DISPLAY TYPE:TN/POSITIVE
2. VIEW DIRECTION: 6 O'CLOCK
3. POLARIZER MODE: REFLECTIVE
4. DRIVER METHED:1/4DUTY,1/3BIAS
5. OPERATING VOLTAGE: 3.0V
6. OPERATING TEMPERATURE: -10 °C TO +60 °C
7. STORAGE TEMPERATURE: -20 °C TO +70 °C
8. CONNECT METHED : PIN
9. ALL DIMENSION ARE IN mm WITH ±0.2 TOLERANCE OR OTHER SPECIALTY

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
COM1	1F	1A	2F	2A	3F	11F	11A	12F	12A	---	---	10A	10F	9A	9F	8A	8F	7A	7F	6A	6F	5A	5F	4A	4F	3A	COM1	---	---	---	
COM2	1G	1B	2G	2B	3G	11G	11B	12G	12B	---	---	10B	10G	9B	9G	8B	8G	7B	7G	6B	6G	5B	5G	4B	4G	3B	---	COM2	---	---	
COM3	1E	1C	2E	2C	3E	11E	11C	12E	12C	---	---	10C	10E	9C	9E	8C	8E	7C	7E	6C	6E	5C	5E	4C	4E	3C	---	COM3	---	---	
COM4	S1	1D	---	2D	---	S4	11D	S5	12D	---	---	10D	---	9D	S3	8D	---	7D	S2	6D	---	5D	---	4D	---	3D	---	---	COM4	---	---


BaoLai 深圳市宝莱雅光电有限公司
SHENZHEN BAO LAI YA OPTOELECTRONICS CO.,LTD

5				Pro. Mode	62816 LCD		Drawing Name		LCD图	
4				SIZE	Tolerance	Draw. BY	WYN	2022. 07. 12	Material	SEE NOTE
3				L< 15	±0.10	Chec. BY	吴程明		Unit	MM
2				15≤L< 100	±0.20	Appr. BY	DAVIS		Draw. Size	A4
1				100≤L< 150	±0.25	Scale	Drawing NO.			Version
	REVISION RECORD		REV	DATE	Proj. Rule(3)	 1:1	BLY-62816-1			A

CUSTOMER APPROVE BY:

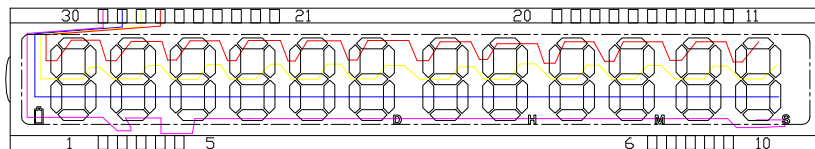


COM

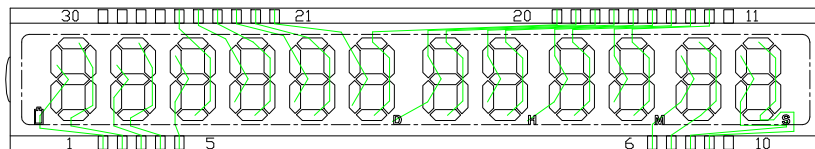

SEG

BaoLai 深圳市宝莱雅光电有限公司
SHENZHEN BAO LAI YA OPTOELECTRONICS CO.,LTD

5				Pro. Mode	62816 LCD		Drawing Name		LCD图	
4				SIZE	Tolerance	Draw. BY	WYN	2022. 07. 12	Material	SEE NOTE
3				L< 15	±0.10	Chec. BY	吴程明		Unit	MM
2				15≤L< 100	±0.20	Appr. BY	DAVIS		Draw. Size	A4
1				100≤L< 150	±0.25	Scale	Drawing NO.			Version
	REVISION RECORD		REV	DATE	Proj. Rule(3)		1:1	BLY-62816-1		A