

Service

Workshop Manual

Audi R8 2007 ➤

Audi R8 2015 ➤

Wheel/Tyre Guide

Edition 01.2019



List of Workshop Manual Repair Groups

Repair Group

44 - Wheels, tyres, vehicle geometry

Contents

44 - Wheels, tyres, vehicle geometry	1
1 Audi R8 Coupé and Spyder	1
1.1 Audi R8, type 42 (model years 2007 to 2015)	1
2 Rims - Audi R8, type 42	6
2.1 Winter rims: 8.5 x 18" with 10.5 x 18"	6
2.2 Winter rims: 8.5 x 19" with 10.5 x 19"	7
2.3 8.5 x 18" rims with 10.5 x 18" rims	8
2.4 8.5 x 19" rims with 11 x 19" rims	8
3 Tyre pressures	12
3.1 Tyre pressures - R8	12
4 Audi R8, type 4S - general information	14
4.1 Changing to different wheel/tyre combinations to the tyre package	14
4.2 Definition of tyre package	14
4.3 COC document (EC certificate of conformity)	15
4.4 Audi R8, type 4S (from model year 2015 onwards)	15



44 – Wheels, tyres, vehicle geometry

1 Audi R8 Coupé and Spyder

(ARL006250; Edition 01.2019)

This Wheel/Tyre Guide is applicable to the following model:

Audi R8 Coupé and Spyder, Audi R8 GT

Important: Please observe the relevant notes and warnings in this manual.



Note

Hub diameter 57 mm, bolt circle diameter 112 mm, 5 wheel bolts, tightening torque 120 Nm



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*

⇒ ["1.1 Audi R8, type 42 \(model years 2007 to 2015\)", page 1](#)

⇒ ["4 Audi R8, type 4S - general information", page 14](#)

⇒ ["4.4 Audi R8, type 4S \(from model year 2015 onwards\)", page 15](#)



Note

⇒ ["3 Tyre pressures", page 12](#)

1.1 Audi R8, type 42 (model years 2007 to 2015)



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*



4.2 ltr. - 309 kW:

⇒ ["1.1.1 4.2 ltr. engine - 309 kW, 8 cylinders", page 2](#)

4.2 ltr. - 316 kW:

⇒ ["1.1.2 4.2 ltr. engine - 316 kW, 8 cylinders", page 3](#)

5.2 ltr. - 386 kW:

⇒ ["1.1.3 5.2 ltr. engine - 386 kW, 10 cylinders", page 4](#)

5.2 ltr. - 404 kW:

⇒ ["1.1.4 5.2 ltr. engine - 404 kW, 10 cylinders", page 4](#)

5.2 ltr. - 419 kW:

⇒ ["1.1.5 5.2 ltr. engine - 419 kW, 10 cylinders", page 5](#)

⇒ ["1 Audi R8 Coupé and Spyder", page 1](#)

1.1.1 4.2 ltr. engine - 309 kW, 8 cylinders



Note

- ◆ Check the information listed in this manual to establish whether the desired rim size or wheel size is permissible for the vehicle in question.
- ◆ When fitting wheels from Audi Genuine Accessories, please also refer to the instructions in the "Accessories" catalogue in the Electronic parts catalogue ETKA (Z-ETKA).

Rim	Offset (mm)	Tyre size	Winter	Summer	Snow chains	Footnote
Front axle: 8.5 J x 18	42	235/40 ZR 18 95 Y XL		x	-	R01 ^{2) 3)}
Rear axle: 10.5 J x 18	50	285/35 ZR 18 101 Y XL		x	-	R01 ^{2) 3)}
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 Y XL		x	-	R01
Rear axle: 11 J x 19	50	295/30 ZR 19 100 Y XL		x	-	R01
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 Y XL		x	-	R01
Rear axle: 11 J x 19	50	305/30 ZR 19 102 Y XL		x	-	R01 ¹⁾
Front axle: 8.5 J x 18	42	235/40 ZR 18 95 W XL	x		-	R01 ^{2) 3)}
Rear axle: 10.5 J x 18	55	285/35 ZR 18 101 W XL	x		rear	R01 ^{2) 3)}
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 W XL	x		-	R01
Rear axle: 10.5 J x 19	55	295/30 ZR 19 100 W XL	x		rear	R01

1) Only permitted with wheel housing extensions

2) Not permissible with 19" brakes or ceramic brakes (1LW, 1KU, etc.)

3) Not permissible with 19" brakes or ceramic brakes (1LW, 1KU, etc.)

We recommend using only tyres with the designation R01; they are matched specifically to the vehicle.

The code R01 may alternatively be R02 or R0...

XL = Extra load, reinforced

⇒ ["1 Audi R8 Coupé and Spyder", page 1](#)

⇒ ["2 Rims - Audi R8, type 42", page 6](#)

1.1.2 4.2 ltr. engine - 316 kW, 8 cylinders



Note

- ◆ Check the information listed in this manual to establish whether the desired rim size or wheel size is permissible for the vehicle in question.
- ◆ When fitting wheels from Audi Genuine Accessories, please also refer to the instructions in the "Accessories" catalogue in the Electronic parts catalogue ETKA (Z-ETKA).

Rim	Offset (mm)	Tyre size	Winter	Summer	Snow chains	Footnote
Front axle: 8.5 J x 18	42	235/40 ZR 18 95 Y XL		x	-	R01 ^{5) 6)}
Rear axle: 10.5 J x 18	50	285/35 ZR 18 101 Y XL		x	-	R01 ^{5) 6)}
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 Y XL		x	-	R01
Rear axle: 11 J x 19	50	295/30 ZR 19 100 Y XL		x	-	R01
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 Y XL		x	-	R01
Rear axle: 11 J x 19	50	305/30 ZR 19 102 Y XL		x	-	R01 ⁴⁾
Front axle: 8.5 J x 18	42	235/40 ZR 18 95 W XL	x		-	R01 ^{5) 6)}
Rear axle: 10.5 J x 18	55	285/35 ZR 18 101 W XL	x		rear	R01 ^{5) 6)}
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 W XL	x		-	R01
Rear axle: 10.5 J x 19	55	295/30 ZR 19 100 W XL	x		rear	R01

4) Only permitted with wheel housing extensions

5) Not permissible with 19" brakes or ceramic brakes (1LW, 1KU, etc.)

6) Not permissible with 19" brakes or ceramic brakes (1LW, 1KU, etc.)

We recommend using only tyres with the designation R01; they are matched specifically to the vehicle.

The code R01 may alternatively be R02 or R0...

XL = Extra load, reinforced

⇒ ["1 Audi R8 Coupé and Spyder", page 1](#)

⇒ ["2 Rims - Audi R8, type 42", page 6](#)



1.1.3 5.2 ltr. engine - 386 kW, 10 cylinders



Note

- ♦ Check the information listed in this manual to establish whether the desired rim size or wheel size is permissible for the vehicle in question.
- ♦ When fitting wheels from Audi Genuine Accessories, please also refer to the instructions in the "Accessories" catalogue in the Electronic parts catalogue ETKA (Z-ETKA).

Rim	Offset (mm)	Tyre size	Winter	Summer	Snow chains	Footnote
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 Y XL		x	-	R01
Rear axle: 11 J x 19	50	295/30 ZR 19 100 Y XL		x	-	R01
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 Y XL		x	-	R01
Rear axle: 11 J x 19	50	305/30 ZR 19 102 Y XL		x	-	R01 ⁷⁾
Front axle: 8.5 J x 18	42	235/40 R 18 95 W XL	x		-	R01 ^{8) 9)}
Rear axle: 10.5 J x 18	55	285/35 R 18 101 W XL	x		rear	R01 ^{8) 9)}
Front axle: 8.5 J x 19	42	235/35 R 19 91 W XL	x		-	R01
Rear axle: 10.5 J x 19	55	295/30 R 19 100 W XL	x		rear	R01

7) Only permitted with wheel housing extensions

8) Not permissible with 19" brakes or ceramic brakes (1LW, 1KU, etc.)

9) Not permissible with 19" brakes or ceramic brakes (1LW, 1KU, etc.)

We recommend using only tyres with the designation R01; they are matched specifically to the vehicle.

The code R01 may alternatively be R02 or R0...

XL = Extra load, reinforced

⇒ "1 Audi R8 Coupé and Spyder", page 1

⇒ "2 Rims - Audi R8, type 42", page 6

1.1.4 5.2 ltr. engine - 404 kW, 10 cylinders

Rim	Offset (mm)	Tyre size	Winter	Summer	Snow chains	Footnote
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 Y XL		x	-	R01
Rear axle: 11 J x 19	50	295/30 ZR 19 100 Y XL		x	-	R01
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 Y XL		x	-	R01

Rim	Offset (mm)	Tyre size	Winter	Summer	Snow chains	Footnote
Rear axle: 11 J x 19	50	305/30 ZR 19 102 Y XL		x	-	R01 ¹⁰⁾
Front axle: 8.5 J x 19	42	235/35 R 19 91 W XL	x		-	R01
Rear axle: 10.5 J x 19	55	295/30 R 19 100 W XL	x		rear	R01

10) Only permitted with wheel housing extensions

We recommend using only tyres with the designation R01; they are matched specifically to the vehicle.

The code R01 may alternatively be R02 or R0...

XL = Extra load, reinforced

1.1.5 5.2 ltr. engine - 419 kW, 10 cylinders



Note

- ◆ Check the information listed in this manual to establish whether the desired rim size or wheel size is permissible for the vehicle in question.
- ◆ When fitting wheels from Audi Genuine Accessories, please also refer to the instructions in the "Accessories" catalogue in the Electronic parts catalogue ETKA (Z-ETKA).

Rim	Offset (mm)	Tyre size	Winter	Summer	Snow chains	Footnote
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 Y XL		x	-	R01
Rear axle: 11 J x 19	50	295/30 ZR 19 100 Y XL		x	-	R01
Front axle: 8.5 J x 19	42	235/35 ZR 19 91 Y XL		x	-	R01
Rear axle: 11 J x 19	50	305/30 ZR 19 102 Y XL		x	-	R01
Front axle: 8.5 J x 19	42	235/35 R 19 91 W XL	x		-	R01
Rear axle: 10.5 J x 19	55	295/30 R 19 100 W XL	x		rear	R01

We recommend using only tyres with the designation R01; they are matched specifically to the vehicle.

The code R01 may alternatively be R02 or R0...

XL = Extra load, reinforced

⇒ ["1 Audi R8 Coupé and Spyder", page 1](#)

⇒ ["2 Rims - Audi R8, type 42", page 6](#)



2 Rims - Audi R8, type 42



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*

⇒ ["1 Audi R8 Coupé and Spyder", page 1](#)

⇒ ["2.1 Winter rims: 8.5 x 18" with 10.5 x 18"', page 6](#)

⇒ ["2.2 Winter rims: 8.5 x 19" with 10.5 x 19"', page 7](#)

⇒ ["2.3 8.5 x 18" rims with 10.5 x 18" rims", page 8](#)

⇒ ["2.4 8.5 x 19" rims with 11 x 19" rims", page 8](#)

2.1 Winter rims: 8.5 x 18" with 10.5 x 18"



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*



Note

- ◆ *Not permissible with ceramic brakes (1LW, 1KU, etc.)*
- ◆ *Not permissible with ceramic brakes*




Note

- ◆ *The part numbers and illustrations of the following rims are examples. Use the "Electronic parts catalogue" to order the correct rims.*
- ◆ *When fitting wheels from Audi Genuine Accessories, please also refer to the instructions in the "Accessories" catalogue in the Electronic parts catalogue ETKA (Z-ETKA).*

Nm	Wheel bolts	Circle dia. (mm)	Wheel hub (mm)
120	5	112	57

Aluminium winter rims, PR number	7FB
420 601 025 - Front axle	
Size of front wheels	8.5 J x 18 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	475 kg
Note: 18" rims are not permissible if the vehicle is equipped with ceramic brakes	
Not permissible with ceramic brakes	
420 601 025 D - Rear axle	
Size of rear wheels	10.5 J x 18 H2
Wheel offset (ET)	55 mm
Max. wheel load for rim	565 kg
Note: 18" rims are not permissible if the vehicle is equipped with ceramic brakes	
Not permissible with ceramic brakes	

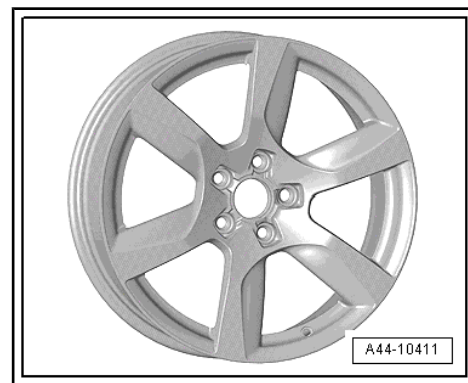

2.2 Winter rims: 8.5 x 19" with 10.5 x 19"



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*



Aluminium winter rims, PR number	7DV
420 601 025 AC - Front axle	
Size of front wheels	8.5 J x 19 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	485 kg
420 601 025 AJ - Rear axle	
Size of rear wheels	10.5 J x 19 H2
Wheel offset (ET)	55 mm
Max. wheel load for rim	580 kg




2.3 8.5 x 18" rims with 10.5 x 18" rims



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*

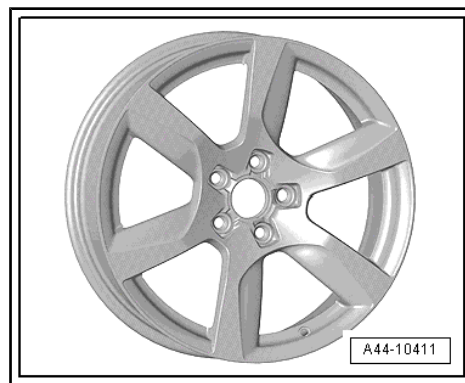

420 601 025 - Front axle	
Size of front wheels	8.5 J x 18 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	475 kg
Note: 18" rims are not permissible if the vehicle is equipped with ceramic brakes	
Not permissible with ceramic brakes	
420 601 025 A - Rear axle	
Size of rear wheels	10.5 J x 18 H2
Wheel offset (ET)	55 mm
Max. wheel load for rim	565 kg
Note: 18" rims are not permissible if the vehicle is equipped with ceramic brakes	
Not permissible with ceramic brakes	

2.4 8.5 x 19" rims with 11 x 19" rims



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*



Note

- ◆ *The part numbers and illustrations of the following rims are merely examples. Use the "Electronic parts catalogue" to order the correct rims.*
- ◆ *When fitting wheels from Audi Genuine Accessories, please also refer to the instructions in the "Accessories" catalogue in the Electronic parts catalogue ETKA (Z-ETKA).*

Nm	Wheel bolts	Circle dia. (mm)	Wheel hub (mm)
120	5	112	57



420 601 025 AK - Front axle	
Size of front wheels	8.5 J x 19 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	485 kg
420 601 025 AL - Rear axle	
Size of rear wheels	11.0 J x 19 H2
Wheel offset (ET)	50 mm
Max. wheel load for rim	580 kg
420 601 025 AM - Front axle	
Size of front wheels	8.5 J x 19 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	485 kg
420 601 025 AN - Rear axle	
Size of rear wheels	11.0 J x 19 H2
Wheel offset (ET)	50 mm
Max. wheel load for rim	580 kg
420 601 025 AP - Front axle	
Size of front wheels	8.5 J x 19 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	485 kg
420 601 025 AQ - Rear axle	
Size of rear wheels	11.0 J x 19 H2
Wheel offset (ET)	50 mm
Max. wheel load for rim	580 kg
420 601 025 AR - Front axle	
Size of front wheels	8.5 J x 19 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	485 kg
420 601 025 AS - Rear axle	
Size of rear wheels	11.0 J x 19 H2
Wheel offset (ET)	50 mm
Max. wheel load for rim	580 kg



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*



420 601 025 BB - Front axle	
Size of front wheels	8.5 J x 19 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	485 kg
420 601 025 BC - Rear axle	
Size of rear wheels	11.0 J x 19 H2
Wheel offset (ET)	50 mm
Max. wheel load for rim	580 kg



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*



420 601 025 BD - Front axle	
Size of front wheels	8.5 J x 19 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	485 kg
420 601 025 BE - Rear axle	
Size of rear wheels	11.0 J x 19 H2
Wheel offset (ET)	50 mm
Max. wheel load for rim	580 kg



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*



420 601 025 BF - Front axle	
Size of front wheels	8.5 J x 19 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	485 kg
420 601 025 BG - Rear axle	
Size of rear wheels	11.0 J x 19 H2
Wheel offset (ET)	50 mm
Max. wheel load for rim	580 kg

420 601 025 CJ - Front axle	
Size of front wheels	8.5 J x 19 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	485 kg
420 601 025 CK - Rear axle	
Size of rear wheels	11.0 J x 19 H2
Wheel offset (ET)	50 mm
Max. wheel load for rim	580 kg

420 601 025 CL - Front axle	
Size of front wheels	8.5 J x 19 H2
Wheel offset (ET)	42 mm
Max. wheel load for rim	485 kg
420 601 025 CM - Rear axle	
Size of rear wheels	11.0 J x 19 H2
Wheel offset (ET)	50 mm
Max. wheel load for rim	580 kg



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*



3 Tyre pressures



Note

- ◆ *Not all engine versions and tyre pressures are specified here.*
- ◆ *The tyre pressure values are constantly subject to change.*
- ◆ *It is not possible to include all changes in one guide.*
- ◆ *The current tyre pressure specifications for your vehicle are indicated on the tyre pressure sticker in the vehicle.*
- ◆ *If the sticker is not in the vehicle, it must be ordered ⇒ ETKA .*

⇒ ["1 Audi R8 Coupé and Spyder", page 1](#)

3.1 Tyre pressures - R8



Note

- ◆ *Not all engine versions and tyre pressures are specified here.*
- ◆ *The tyre pressure values are constantly subject to change.*
- ◆ *It is not possible to include all changes in one guide.*
- ◆ *The current tyre pressure specifications for your vehicle are indicated on the tyre pressure sticker in the vehicle.*
- ◆ *If the sticker is not in the vehicle, it must be ordered ⇒ ETKA .*

⇒ ["3.1.1 4.2 ltr. engine - 309 kW / 316 kW ", page 12](#)

⇒ ["3.1.2 5.2 ltr. engine - 386 kW ", page 13](#)

3.1.1 4.2 ltr. engine - 309 kW / 316 kW



Note

- ◆ *The specified tyre pressures are listed on the sticker in the vehicle; these figures can be taken as correct.*
- ◆ *If there is no tyre pressure sticker in the vehicle, it must be ordered ⇒ Electronic parts catalogue .*

4.2 ltr. engine - 309/316 kW	Partly laden (bar)		Fully laden (bar)	
Size	front	rear	front	rear
235/40 ZR18 95Y XL	2.1	-----	2.2	-----
285/35 ZR18 101Y XL	-----	2.0	-----	2.5
235/35 ZR19 91Y XL	2.1	-----	2.2	-----
295/30 ZR19 100Y XL	-----	2.1	-----	2.6
235/35 ZR19 91Y XL	2.1	-----	2.2	-----
305/30 ZR19 102Y XL	-----	2.0	-----	2.5

4.2 ltr. engine - 309/316 kW	Partly laden (bar)		Fully laden (bar)	
235/40 R18 95W XL M+S	2.2	-----	2.4	-----
285/35 R18 101W XL M+S	-----	2.1	-----	2.6
235/35 R19 91W XL M+S	2.2	-----	2.4	-----
295/30 R19 100W XL M+S	-----	2.1	-----	2.6

XL = Extra load, reinforced

3.1.2 5.2 ltr. engine - 386 kW



Note

- ◆ *The specified tyre pressures are listed on the sticker in the vehicle; these figures can be taken as correct.*
- ◆ *If there is no tyre pressure sticker in the vehicle, it must be ordered ⇒ Electronic parts catalogue .*

5.2 ltr. engine - 386 kW	Partly laden (bar)		Fully laden (bar)	
Size	front	rear	front	rear
235/40 ZR18 95Y XL	2.1	-----	2.2	-----
285/35 ZR18 101Y XL	-----	2.0	-----	2.5
235/35 ZR19 91Y XL	2.1	-----	2.2	-----
295/30 ZR19 100Y XL	-----	2.1	-----	2.6
235/35 ZR19 91Y XL	2.1	-----	2.2	-----
305/30 ZR19 102Y XL	-----	2.0	-----	2.5
235/40 R18 95W XL M+S	2.2	-----	2.4	-----
285/35 R18 101W XL M+S	-----	2.1	-----	2.6
235/35 R19 91W XL M+S	2.2	-----	2.4	-----
295/30 R19 100W XL M+S	-----	2.1	-----	2.6

XL = Extra load, reinforced



4 Audi R8, type 4S - general information

⇒ ["4.1 Changing to different wheel/tyre combinations to the tyre package", page 14](#)

⇒ ["4.4 Audi R8, type 4S \(from model year 2015 onwards\)", page 15](#)

4.1 Changing to different wheel/tyre combinations to the tyre package



Note

- ◆ *Changing to wheel/tyre combinations which differ from those specified on the COC document (EC certificate of conformity) is possible from a technical perspective.*
- ◆ *These technical options can be found in the Wheel/Tyre Guide.*

The following condition must have been met before changing to different wheel/tyre combinations:

- ◆ Fitting a wheel/tyre combination that is not specified in the vehicle registration documents or the COC document (EC certificate of conformity) causes the vehicle to lose its operating permit in the Federal Republic of Germany. To reobtain the operating permit, the vehicle must be inspected and assessed by an officially recognised expert or inspector for motor traffic according to §19.2 / §21 of the German Road Traffic Permit Act (StVZO). A new operating permit must then be applied for at the relevant registration authority.
- ◆ If a valid ABE (General Operating Permit) or a document from the Federal Motor Transport Authority on the differing wheel/tyre combination is available, it may not be necessary to present the vehicle for inspection.
- ◆ Please note the legal requirements in your country.
- ◆ The registration regulations applicable in the relevant countries must be observed.

4.2 Definition of tyre package

To increase energy efficiency and to protect the environment, special tyre packages have been developed for each type by engine version. These tyre packages are valid from week 22/2015 onwards.

The tyre packages were developed to reduce carbon dioxide emissions according to the specifications of the European Union and to conform to national tax laws.



Note

- ◆ *Changing to wheel/tyre combinations which differ from those specified on the COC document (EC certificate of conformity) is possible from a technical perspective.*
- ◆ *These technical options can be found in the Wheel/Tyre Guide.*

⇒ [“4.3 COC document \(EC certificate of conformity\)”, page 15](#)

⇒ [“4.1 Changing to different wheel/tyre combinations to the tyre package”, page 14](#)

4.3 COC document (EC certificate of conformity)

An automobile manufacturer must apply for an EC operating permit for all passenger cars (vehicle class M1).

A certificate - the so-called COC (Certificate of Conformity) - is issued on the basis of this operating permit.

This document certifies that the vehicle conforms with the EC operating permit (EC type approval) and can be registered in every EU country without the need for individual approval.

The document is issued for all vehicles produced in accordance with the EC operating permit.

The COC document has the same significance as the registration documents; the original certificate should therefore not be kept in the vehicle.

The COC document contains comprehensive technical vehicle data and all permissible wheel/tyre combinations.

Further registration documents consist of:

- ◆ Registration document (part I) and
- ◆ Registration document (part II).

4.4 Audi R8, type 4S (from model year 2015 onwards)

 **WARNING**
Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*

⇒ [“4.4.1 5.2 ltr. engine - 368 kW”, page 15](#)

⇒ [“4.4.2 5.2 ltr. engine - 397 kW”, page 16](#)

⇒ [“4.4.3 5.2 ltr. engine - 449 kW”, page 18](#)

4.4.1 5.2 ltr. engine - 368 kW

Audi R8, type 4S

Additional information > 300 km/h

	front	rear	front	rear	front	rear
Required wheel load (kg)	458	565	473	593	470	590
Max. speed (km/h)	320 / 330		318		328	



Camber (°)	1.3	1.0	1.3	1.0	1.3	1.0
------------	-----	-----	-----	-----	-----	-----

These are the wheel/tyre combinations which are possible for the vehicle from a technical perspective.

Check whether the desired rim size or wheel size is permissible for the vehicle in question.

When doing so, it is very important to refer to the "General information" ➔ [page 14](#).

19" summer tyres						
Rim	Offset (mm)	Tyre size	Winter	Summer	Snow chains	Footnote
Front axle: 8.5 J x 19	42	245/35 ZR 19 93 Y	----	X	----	
Rear axle: 11 J x 19	50	295/35 ZR 19 104 Y	----	X	----	
19" summer tyres						
Front axle: 8.5 J x 19	42	245/35 ZR 19 93 Y	----	X	----	
Rear axle: 11 J x 19	44	295/35 ZR 19 104 Y	----	X	----	
20" summer tyres						
Front axle: 8.5 J x 20	42	245/30 ZR 20 90 Y	----	X	----	
Rear axle: 11 J x 20	47	305/30 ZR 20 103 Y	----	X	----	
19" winter tyres						
Front axle: 8.5 J x 19	42	245/35 R 19 93 W	X	----	----	
Rear axle: 10.5 J x 19	55	295/35 R 19 104 W	X	----	X	11)
20" winter tyres						
Rear axle: 8.5 J x 20	42	245/30 R 20 90 W	X	----	----	
Rear axle: 11 J x 20	47	295/30 R 20 101 W	X	----	----	

11) Snow chains are approved for use with this tyre only.

19" temporary spare wheel			
Rim	Offset (mm)	Tyre size	
6.5 B x 19	6	175/50 -19 97 P	front
6.5 B x 19	6	175/50 -19 97 P	rear

- ◆ Temporary spare wheel - maximum speed: 80km/h / 50 mph
- ◆ Only permissible for short distances; fit standard wheel as soon as possible
- ◆ Tyre pressure: 3.5 bar

4.4.2 5.2 ltr. engine - 397 kW

Audi R8, type 4S

Additional information > 300 km/h

	front	rear	front	rear	front	rear
--	-------	------	-------	------	-------	------

Required wheel load (kg)	458	565	473	593	470	590
Max. speed (km/h)	320 / 330		318		328	
Camber (°)	1.3	1.0	1.3	1.0	1.3	1.0

These are the wheel/tyre combinations which are possible for the vehicle from a technical perspective.

Check whether the desired rim size or wheel size is permissible for the vehicle in question.

When doing so, it is very important to refer to the "General information" ⇒ [page 14](#).

19" summer tyres						
Rim	Offset (mm)	Tyre size	Winter	Summer	Snow chains	Footnote
Front axle: 8.5 J x 19	42	245/35 ZR 19 93 Y		x	-	
Rear axle: 11 J x 19	50	295/35 ZR 19 104 Y		x	-	
19" summer tyres						
Front axle: 8.5 J x 19	42	245/35 ZR 19 93 Y		x	-	
Rear axle: 11 J x 19	44	295/35 ZR 19 104 Y		x	-	
20" summer tyres						
Front axle: 8.5 J x 20	42	245/30 ZR 20 90 Y		x	-	
Rear axle: 11 J x 20	47	305/30 ZR 20 103 Y		x	-	
19" winter tyres						
Front axle: 8.5 J x 19	42	245/35 R 19 93 W	x		-	
Rear axle: 10.5 J x 19	55	295/35 R 19 104 W	x		rear	¹²⁾
20" winter tyres						
Rear axle: 8.5 J x 20	42	245/30 R 20 90 W	x		-	
Rear axle: 11 J x 20	47	295/30 R 20 101 W	x		-	

12) Snow chains are approved for use with this tyre only.

19" temporary spare wheel			
Rim	Offset (mm)	Tyre size	
6.5 B x 19	6	175/50 -19 97 P	front
6.5 B x 19	6	175/50 -19 97 P	rear

- ◆ Temporary spare wheel - maximum speed: 80km/h / 50 mph
- ◆ Only permissible for short distances; fit standard wheel as soon as possible
- ◆ Tyre pressure: 3.5 bar



4.4.3 5.2 ltr. engine - 449 kW

Audi R8, type 4S

Additional information > 300 km/h

	front	rear	front	rear	front	rear
Required wheel load (kg)	458	565	473	593	470	590
Max. speed (km/h)	320 / 330		318		328	
Camber (°)	1.3	1.0	1.3	1.0	1.3	1.0

These are the wheel/tyre combinations which are possible for the vehicle from a technical perspective.

Check whether the desired rim size or wheel size is permissible for the vehicle in question.

When doing so, it is very important to refer to the "General information" ⇒ [page 14](#) .

19" summer tyres						
Rim	Offset (mm)	Tyre size	Winter	Summer	Snow chains	Footnote
Front axle: 8.5 J x 19	42	245/35 ZR 19 93 Y		x	-	
Rear axle: 11 J x 19	50	295/35 ZR 19 104 Y		x	-	
19" summer tyres						
Front axle: 8.5 J x 19	42	245/35 ZR 19 93 Y		x	-	
Rear axle: 11 J x 19	44	295/35 ZR 19 104 Y		x	-	
20" summer tyres						
Front axle: 8.5 J x 20	42	245/30 ZR 20 90 Y		x	-	
Rear axle: 11 J x 20	47	305/30 ZR 20 103 Y		x	-	
19" winter tyres						
Front axle: 8.5 J x 19	42	245/35 R 19 93 W	x		-	
Rear axle: 10.5 J x 19	55	295/35 R 19 104 W	x		rear	13)
20" winter tyres						
Rear axle: 8.5 J x 20	42	245/30 R 20 90 W	x		-	
Rear axle: 11 J x 20	47	295/30 R 20 101 W	x		-	

13) Snow chains are approved for use with this tyre only.

19" temporary spare wheel			
Rim	Offset (mm)	Tyre size	
6.5 B x 19	6	175/50 -19 97 P	front

19" temporary spare wheel			
Rim	Offset (mm)	Tyre size	
6.5 B x 19	6	175/50 -19 97 P	rear

- ◆ Temporary spare wheel - maximum speed: 80km/h / 50 mph
- ◆ Only permissible for short distances; fit standard wheel as soon as possible
- ◆ Tyre pressure: 3.5 bar



WARNING

Rims for type 42 vehicles must not be fitted on R8 type 4S vehicles.

- ◆ *Load rating of rims for type 42 vehicles is too low for type 4S vehicles*
- ◆ *Diameter of wheel hub (rear) on type 4S vehicles is 66.5 mm*
- ◆ *Diameter of wheel hub (rear) on type 42 vehicles is 57 mm*