



GTC4Lusso USA - Brake callipers - Latest Update: 2021-01-26

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Ferrari S.p.A. Ferrari S.p.A. does not guarantee or accept any liability with respect to the correctness of information in this document.

Copyright by Ferrari S.p.A. - P.IVA 00159560366

D3.04 Brake callipers

Removing the front brake callipers



Hydraulic brake fluid is corrosive.


Contact with brake fluid may cause severe injury or damage to painted parts of the vehicle.

In the event of skin contact with fluid, wash the respective part of the body immediately with plenty of water.

In the event of contact between the fluid and painted parts of the vehicle, wash and dry the respective areas immediately.

➤ Remove the complete wheels ( D2.01).

➤ Remove the front brake pads ( D3.03).

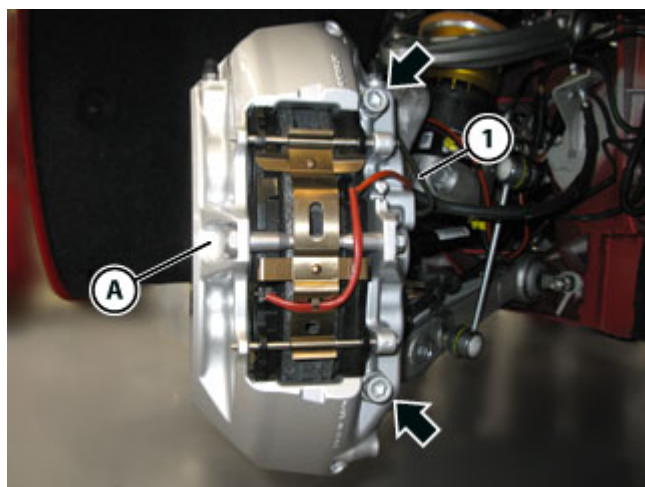

- Disconnect the pipe (1) undoing the relative union.
- Undo the screws indicated.
- Remove the calliper (A).


Refitting the front brake callipers



Tightening torque	Nm	Class

			
Tightening torque		Nm	Class
Fastening brake callipers	Screw	100 Nm	A
Fastening the brake fluid pipes	Union	16 Nm	B
	Union	20 ÷ 23 Nm	0

- Check that the mating surfaces between the calliper and the hub carrier are clean.

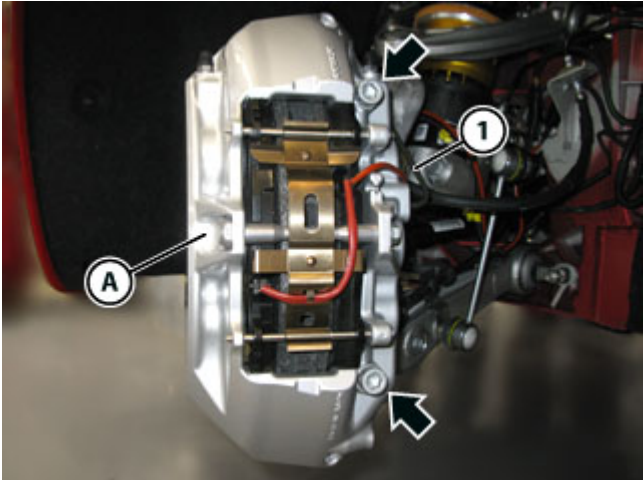

- Fit the brake calliper (A).
- Tighten the screws indicated.

		
Tightening torque	Nm	Class
Screw	100 Nm	A

- Connect the pipe (1), tightening the relative union.


		
Tightening torque	Nm	Class
Union	16 Nm	B

- Refit the front brake pads ( D3.03).
- Fill and bleed the brake system ( D3.10).
- Refit the complete wheels ( D2.01).
- Refit the front wheels.

Removing the rear brake callipers

 Hydraulic brake fluid is corrosive.
Contact with brake fluid may cause severe injury or damage to painted parts of the vehicle.
In the event of skin contact with fluid, wash the respective part of the body immediately with plenty of water.
In the event of contact between the fluid and painted parts of the vehicle, wash and dry the respective areas immediately.

- Remove the complete wheels ( D2.01).
- Remove the rear wheels.
- Remove the rear brake pads ( D3.03).

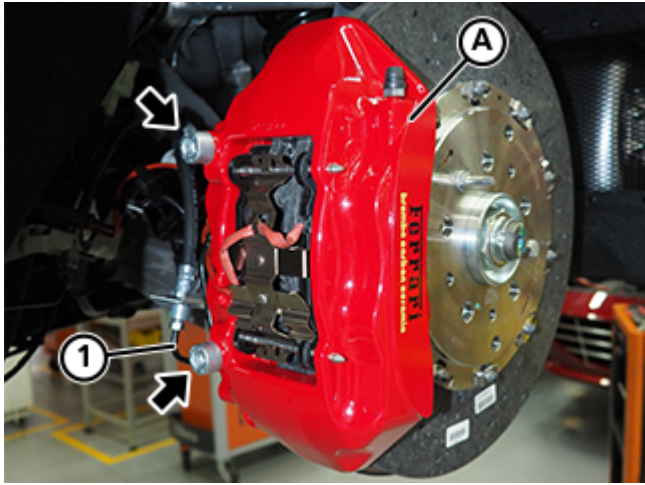


- Disconnect the pipe (1) undoing the relative union.
- Undo the screws indicated.
- Remove the calliper (A).

Refitting the rear brake callipers

			
Tightening torque		Nm	Class
Fastening brake callipers	Screw	100 Nm	A
Fastening the brake fluid pipes	Union	16 Nm	B
	Union	20 ÷ 23 Nm	0

- Check that the mating surfaces between the calliper and the hub carrier are clean.

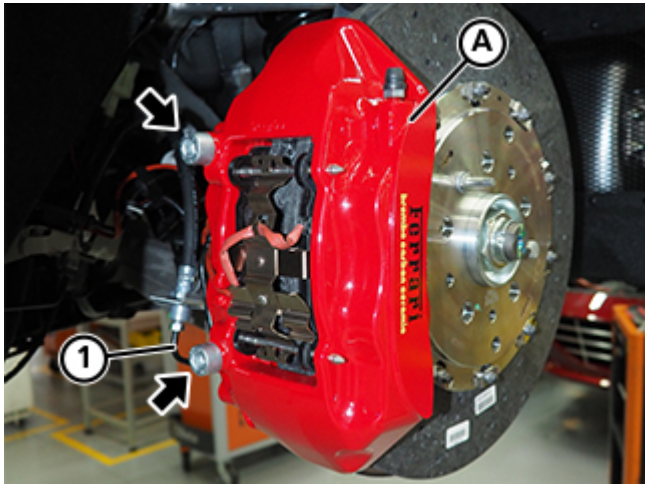

- Fit the brake calliper (A).
- Tighten the screws indicated.

		
Tightening torque	Nm	Class
Screw	100 Nm	A

- Connect the pipe (1), tightening the relative union.

		
Tightening torque	Nm	Class
Union	16 Nm	B

- Refit the rear brake pads ( D3.03).
- Fill and bleed the brake system ( D3.10).
- Refit the complete wheels ( D2.01).
- Refit the rear wheels.

