



GTC4Lusso USA - Pedal board - Latest Update: 2021-01-26

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Ferrari S.p.A. Ferrari S.p.A. does not guarantee or accept any liability with respect to the correctness of information in this document.

Copyright by Ferrari S.p.A. - P.IVA 00159560366


D3.09 Pedal board

Removing the pedal board

- Disconnect the battery ( F2.01).
- Remove the dashboard ( E4.02).




- Detach the linkage (**A**), removing the indicated clip.

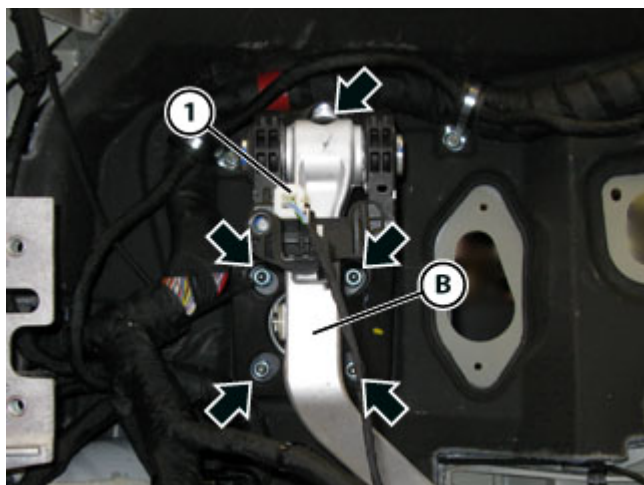

- Disconnect the connector (**1**).
- Undo the indicated nuts and screw.
- Ease out and remove the pedal board (**B**).

Refitting the pedal board

			
Tightening torque		Nm	Class
Fastening the pedal board	Nut	20 Nm	B
	Screw	20 Nm	B

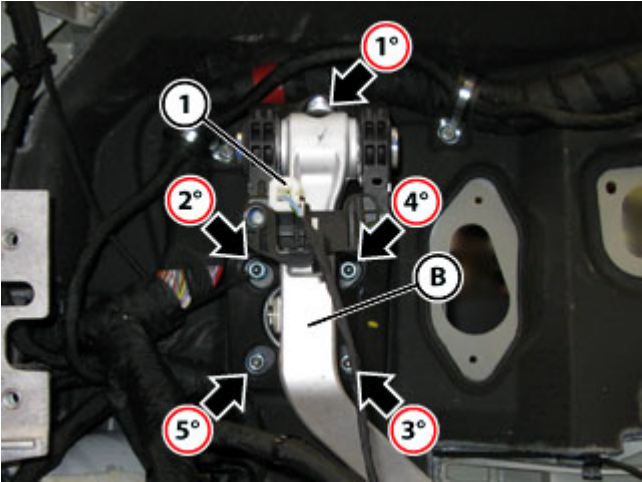

- Place the pedal board **(B)**.
- Tighten the indicated screw and nuts in the sequence given.

		
Tightening torque	Nm	Class
Screw	20 Nm	B
Nut	20 Nm	B

- Connect the connector **(1)**.



- Fit the indicated clip in the relative seat.
- Press the pedal fully to connect the linkage **(A)** with the brake servo by fastening the indicated clip.
- Release the pedal and ensure that the connection is secure.

- Refit the dashboard (🔧 E4.02).
- Connect the battery (🔧 F2.01).
- Connect the DEIS tester to the diagnostic socket (🔧 F2.09).
-  Perform the respective cycle with the DEIS diagnostic tester.