



GTC4Lusso USA - Filling and bleeding the brake system - Latest Update: 2021-01-26

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Ferrari S.p.A. Ferrari S.p.A. does not guarantee or accept any liability with respect to the correctness of information in this document.

Copyright by Ferrari S.p.A. - P.IVA 00159560366

D3.10 Filling and bleeding the brake system

Filling and bleeding the brake system

			
Tightening torque		Nm	Class
Fastening bleed unions - brake callipers	Union	17 ÷ 20 Nm	0



Hydraulic brake fluid is corrosive.

Contact with brake fluid may cause severe injury or damage to painted parts of the vehicle.

In the event of skin contact with fluid, wash the respective part of the body immediately with plenty of water.

In the event of contact between the fluid and painted parts of the vehicle, wash and dry the respective areas immediately.




Always use fresh oil of the recommended type and in the quantity indicated, taken from sealed containers.



The circuit is filled with synthetic oil.

Using mineral oil may cause irreparable damage to the rubber seals in the system.


- Remove the complete wheels ( D2.01).
- Remove the engine compartment cosmetic shields ( E3.14).
- Remove the left hand cosmetic inspection shield.
- Connect the DEIS tester to the diagnostic socket ( F2.09).

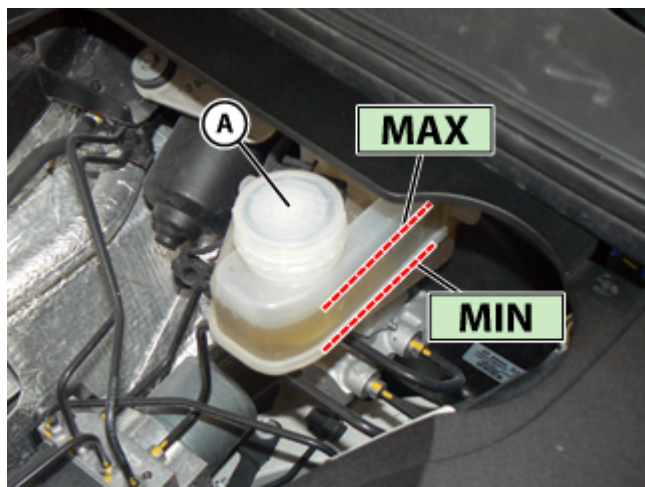


- Undo and open the cap **(A)**.
- Fill the reservoir gradually with the specified brake fluid up to the **MAX** level.




- Prise off the protective caps **(1)** on the bleed unions on the brake calliper.

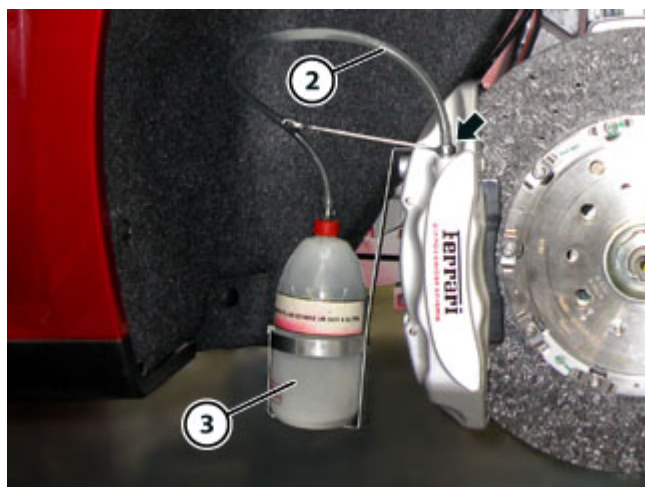

- Connect a suitable transparent pipe **(2)** to the bleed unions indicated.
 - Place a container **(3)** for collecting brake fluid near the calliper.
 - Insert the end of the pipe in the container **(3)**.
 - Use the DEIS diagnostic tester to perform the respective brake system bleeding procedure, depressing the brake pedal during the cycle to pressurise the circuit, until all air is expelled from the circuit.
-  The brake system bleed cycle must be performed for each individual calliper.

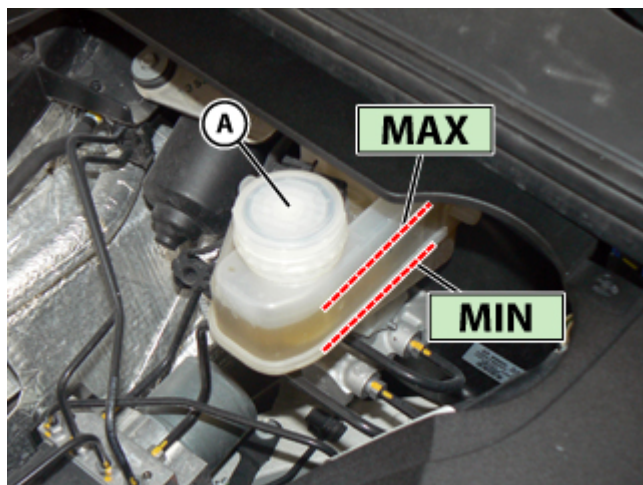

- During the brake system bleeding procedure, the brake fluid level must NOT be allowed to drop below the **MIN** level. Check the brake fluid level in the reservoir continuously and top up whenever necessary.

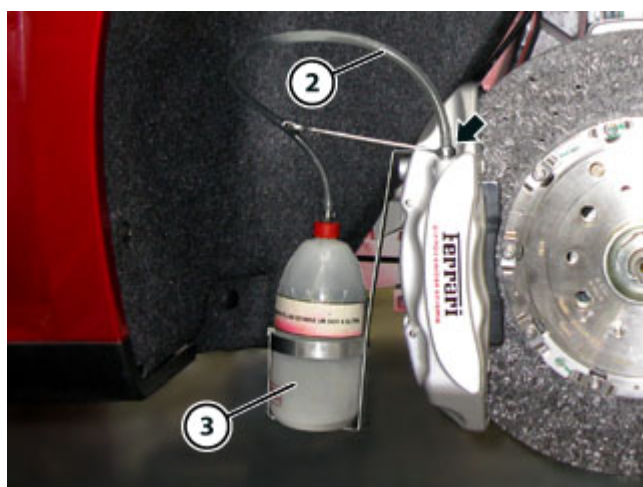

- Disconnect the transparent pipe (2) from the indicated bleed union.
- Remove the container (3).
- Tighten the indicated bleed union.

Tightening torque	Nm	Class
Union	17 ÷ 20 Nm	0



- Fit the protective caps for the bleed unions (1) on the brake calliper.

- Check the brake fluid level (A3.05).

- Pour new brake fluid into the reservoir to reach the **MAX** level.
- After the procedure, there must be no sponginess in the pedal and the braking action must be progressive, starting immediately after a short free play.
- Refit the engine compartment cosmetic shields (E3.14).
 - Refit the left hand cosmetic inspection shield.
- Refit the complete wheels (D2.01).

