



GTC4Lusso USA - Front bumper - Latest Update: 2021-01-26


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Ferrari S.p.A. Ferrari S.p.A. does not guarantee or accept any liability with respect to the correctness of information in this document.

Copyright by Ferrari S.p.A. - P.IVA 00159560366


E3.03 Front bumper

Removing the front bumper


- Disconnect the battery ( F2.01).
- Remove the flat undertray sections ( E3.13).
 -  Remove the front flat undertray section.
- Remove the front wheelhouses ( E3.05).
 -  Remove only the front sections of the front wheelhouses.

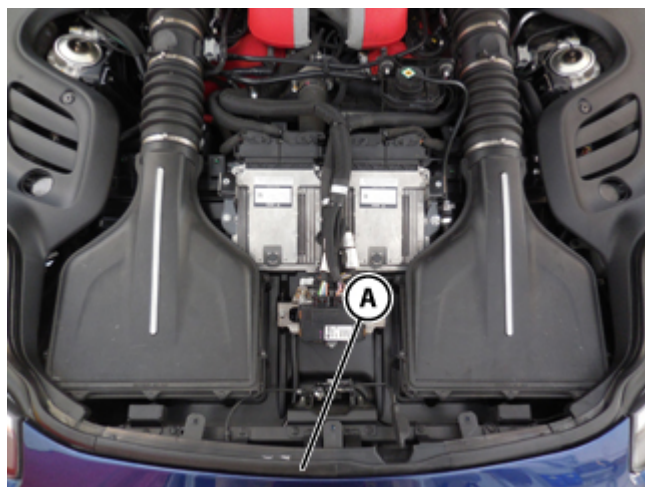


- Detach and remove the seal (A).

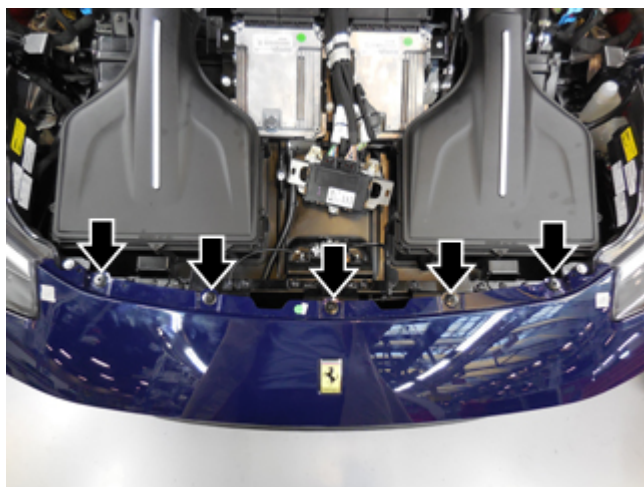


- Undo the screws indicated.

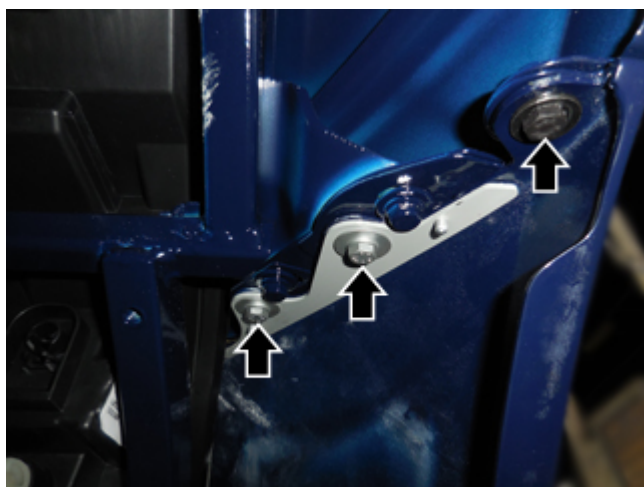

- Undo the screws indicated.

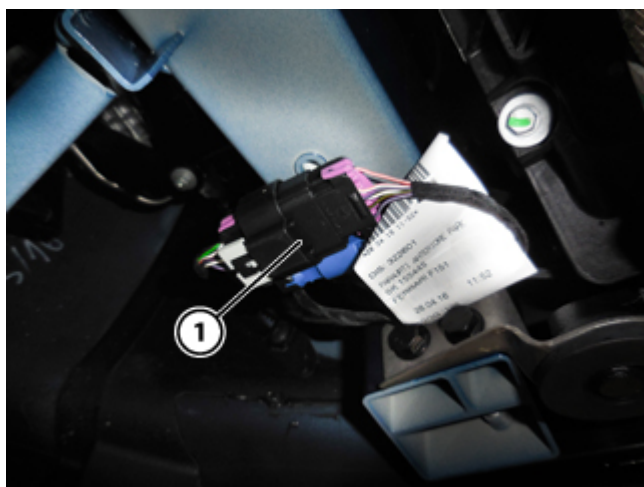

- Release and disconnect connector (1).

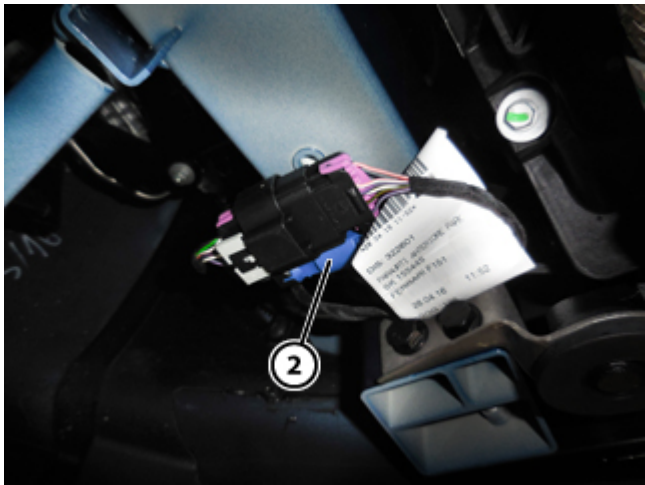

For vehicles with front parking camera


- Disconnect the connector (2) and release the respective cable.

- Disconnect the headlamp washer pipe.
- Remove the front bumper.

Refitting the front bumper


			
Tightening torque		Nm	Class
Fastening front bumper	Screw	7 Nm	B
	Screw	6 Nm	B

- Fit the front bumper.
- Connect the headlamp washer pipe.

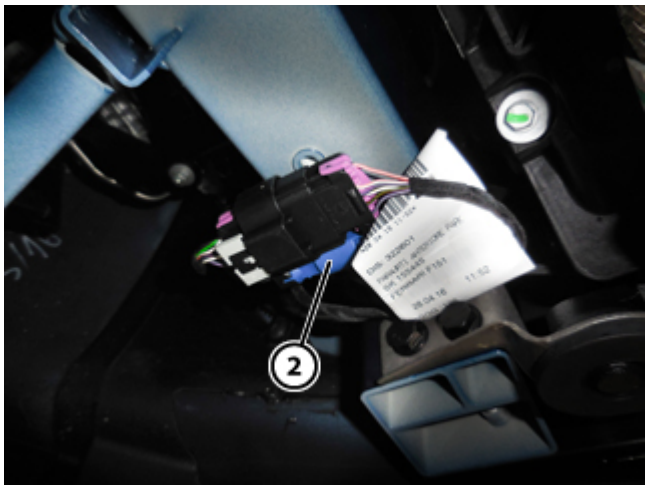


For vehicles with front parking camera

- Connect the connector (2) and fasten the respective cable.

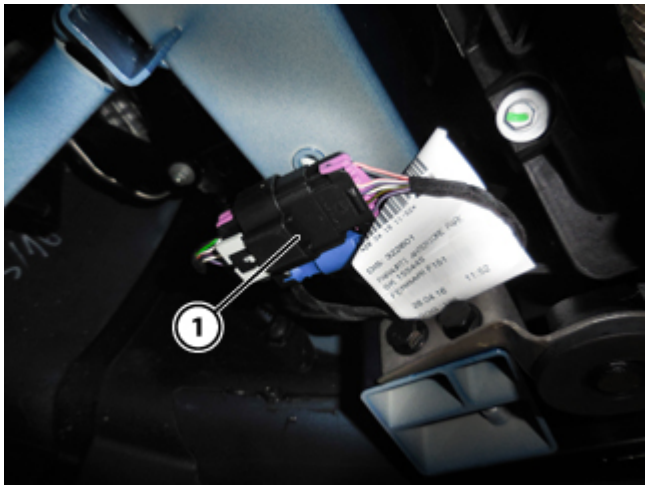


- Connect and fasten the connector (1).

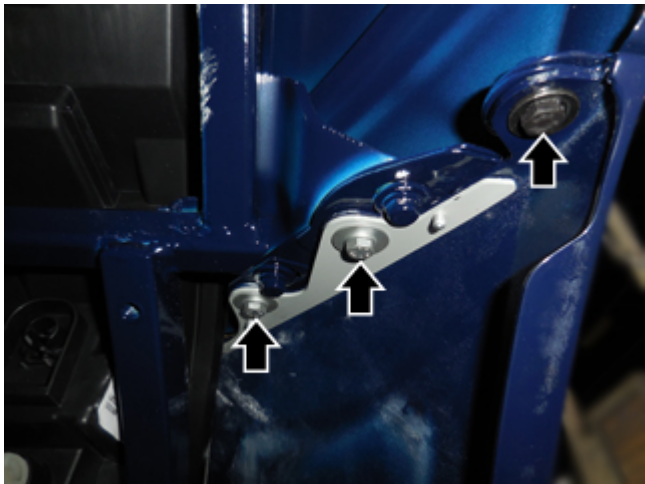


- Checking that the front bumper is correctly aligned with the fender, tighten the indicated screws.

		
Tightening torque	Nm	Class
Screw	6 Nm	B

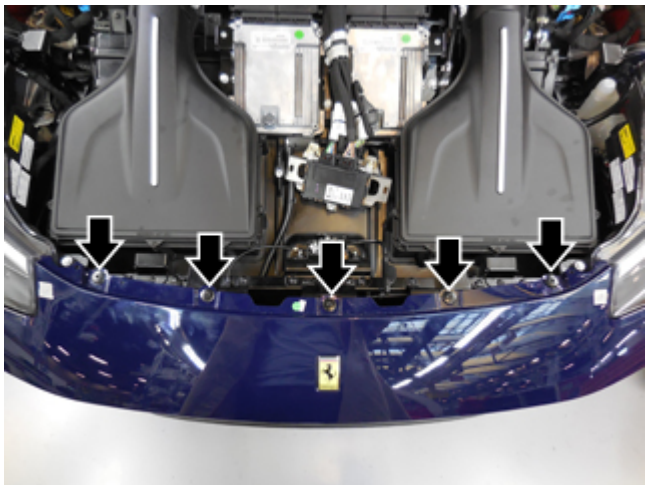

- Tighten the screws indicated.
- Close the engine compartment lid and check that it is correctly aligned with the front bumper.
- In the event of misalignment between the front bumper and the engine compartment lid, add or remove split washers as necessary on the screws indicated.
- Tighten the screws indicated.

		
Tightening torque	Nm	Class
Screw	7 Nm	B

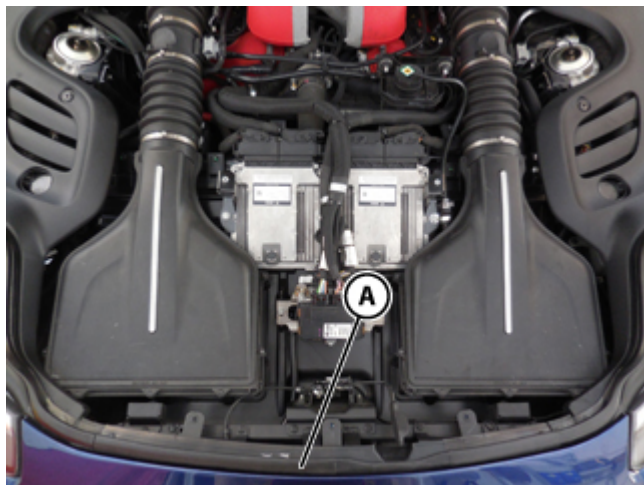

- Fit and fasten the seal **(A)**.
- If necessary, replace the double sided adhesive tape.

- Refit the front wheelhouses (🔧 E3.05).
- Refit the flat undertray sections (🔧 E3.13).
- Refit the front flat undertray section.
- Connect the battery (🔧 F2.01).