



GTC4Lusso USA - Windscreen - Latest Update: 2021-01-26

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Ferrari S.p.A. Ferrari S.p.A. does not guarantee or accept any liability with respect to the correctness of information in this document.

Copyright by Ferrari S.p.A. - P.IVA 00159560366

E3.06 Windscreen

Diagnosing windscreen damage

Preparation in progress

Replacing the windscreen



In the event of windscreen defects on vehicles still covered by the Manufacturer's Warranty or with a valid Extended Warranty, please proceed as indicated in Technical Information 2408 of February 2017.



Protect all painted bodywork parts and the cabin to prevent damage when using cutting equipment and when installing the new windscreen.

➤ Remove the engine compartment cosmetic shields ( E3.14).




Remove the lateral underwindscreen cosmetic shields.

➤ Remove the interior rear view mirror ( E5.07).

➤ Remove the rain/twilight sensor ( F2.11).



- Use tool **(AS 107318)** (see Technical Information 2202 of July 2014) to remove the adhesive from the seat of the screen on the vehicle. This tool makes the procedure considerably quicker than with previous tools. See the manual included in the case containing the tool for the instructions for installing and using the tool **(AS 107318)**.

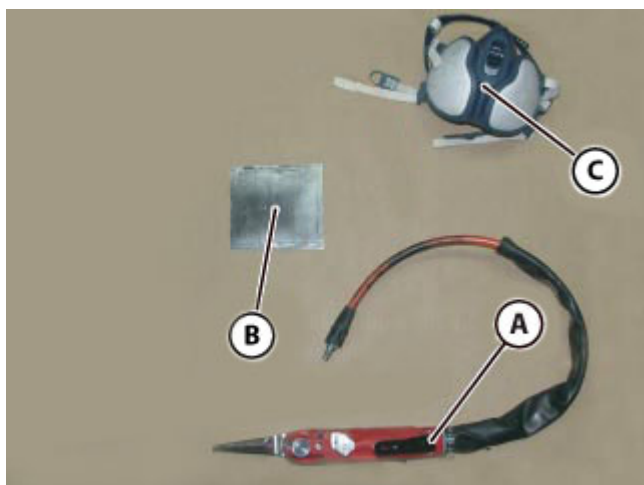

- One (Excalibur pneumatic cutter with ESM - 519 short blade) **(A)**.
- A thin metal plate (0.5 mm thick) **(B)**.
i To facilitate removal and protect the bodywork from the cutter blade.
- A face mask **(C)**.
i To protect the operator's airways from airborne fragments of material.
- i* Safety eyewear is also recommended to protect the eyes from flying splinters.



-  Always place the metal plate against the pneumatic cutter blade before performing each cut, with the edge of the plate against the bodywork so that the plate itself acts as a barrier for the pneumatic cutter blade.
-  Ensure that the metal plate slides freely, as it must move together with the pneumatic cutter during the cutting procedure.
- To cut the sealant along the edges, place the cutter blade **(C)** between the bodyshell and the glass seal.




- Using suction cup handles, remove the windscreen and replace.



- Apply strips of adhesive tape to the bodywork, around the perimeter of the seat of the windscreen, to protect the bodywork itself.
-  Take care not to damage the bodywork.

- Use the (Excalibur pneumatic cutter with ESM - 519 short blade) **(A)** to remove all residue of sealant from the seat of the windscreen.
- Blow the seat of the windscreen with compressed air to clean thoroughly.
- Use **DOW BETACLEAN 3350 Black cap, code 81636700** to degrease the seat of the windscreen.

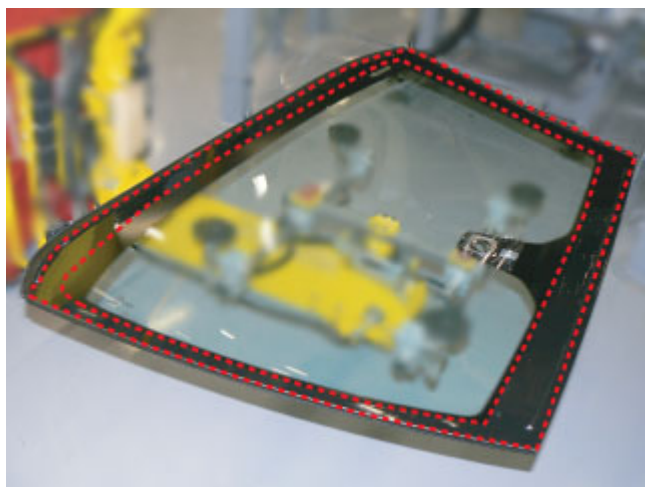


-  Check that there are no flaws or chips in the surface of the new screen and around its perimeter.

- Place the new windscreen carefully on a stable surface so that it is not scratched or damaged.
- Degrease the perimeter of the windscreen with **DOW BETACLEAN 3300 code 81636500** and leave to dry.

-  Protect newly applied primer from draughts during work breaks. Never exceed the drying time of 8 hours.

- Apply **DOW BETAPRIME 5500 Green cap** to the entire perimeter of the windscreen between the dotted lines and leave the product to dry for at least **5 minutes**.

-  The inner dotted line at the top and side of the glass overlaps the solid screen-printed area by approximately **10 mm**.

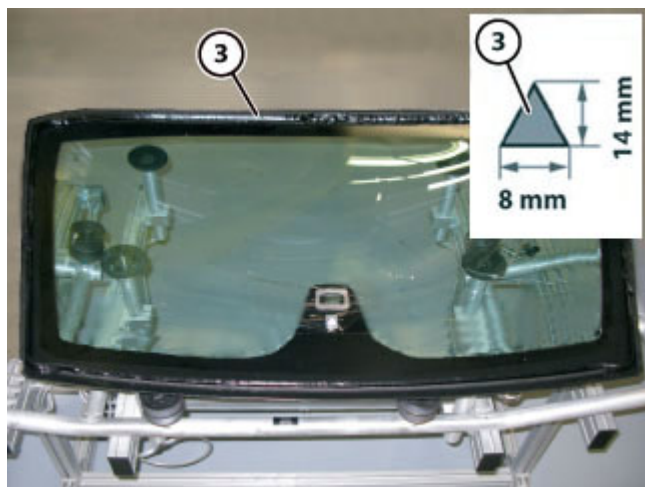

Apply adhesive primer in a uniform, uninterrupted bead.

- Using an extrusion gun with a triangular section nozzle, apply a continuous bead (3) of **DOW BETASEAL 1812** around the perimeter of the windscreen, starting from the mid point of the bottom edge and overlapping the ends of the bead by approximately **20-30 mm**.
- Check that there are no bubbles or interruptions in the bead. Apply additional sealant if necessary.



The fitting of the windscreen on the bodyshell must take place with no possibility of delay within 5 minutes from the application of the adhesive tape.

- Using specific suction cup handles and working from the exterior of the vehicle, fit the new windscreen on the bodywork.
- Press around the entire perimeter of the windscreen.
- Use a **4 mm ± 1.5 mm** feeler gauge to check that the windscreen is aligned correctly.
- If the windscreen is not correctly aligned, adjust manually.
- Apply a few strips of adhesive fabric tape **SYROM 90** to hold the windscreen in position.
- Wait at least **3 hours**.
- Remove the adhesive tape and remove any excess sealant around the windscreen with heptane.

- Refit the rain/twilight sensor (🔧 F2.11).
- Refit the interior rear view mirror (🔧 E5.07).
- Refit the roof trim panels (🔧 E4.04).
- Refit the front ceiling cross member trim panel.

- Refit the engine compartment cosmetic shields (🔧 E3.14).
- Refit the lateral underwindscreen cosmetic shields.