



GTC4Lusso USA - Rear screen - Latest Update: 2021-01-26

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Ferrari S.p.A. Ferrari S.p.A. does not guarantee or accept any liability with respect to the correctness of information in this document.

Copyright by Ferrari S.p.A. - P.IVA 00159560366

E3.08 Rear screen

Replacing the rear screen



Protect all painted bodywork parts and the cabin to prevent damage when using cutting equipment and when installing the new windscreen.


The rear screen is supplied as a spare part complete with perimeter seal, which must not be detached from the glass.

➤ Remove the luggage compartment trim panels ( E4.06).


 Remove the luggage compartment trim panels.

➤ For vehicles with rear screen wiper.. Replace the rear screen wiper unit ( E3.10).


 Remove the rear screen wiper unit.

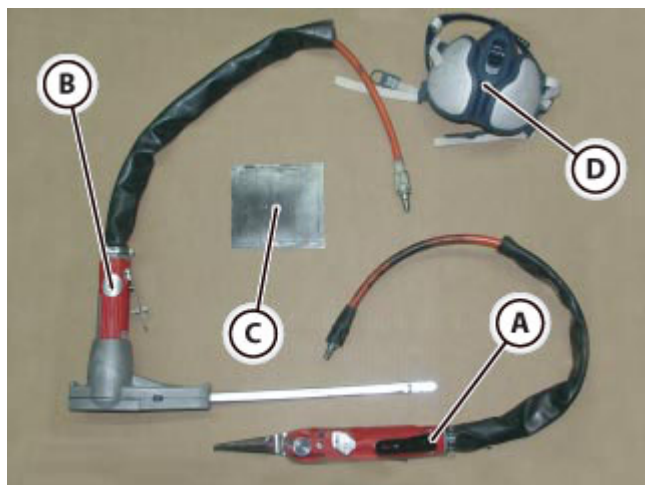


- The following tools are required to remove the rear screen glass:
- One (Excalibur pneumatic cutter with ESM - 519 short blade) **(A)**.
i For cutting the sealant in the more easily accessible locations and for removing excess sealant on the bodyshell.
- One (Excalibur 6 pneumatic cutter with Equaliser Pat. 4955124 long blade) **(B)**.
i For cutting the sealant in deeper, less accessible locations.
- A thin metal plate (0.5 mm thick) **(C)**.
i To facilitate cutting and protect the bodywork from the cutter blade.
- A face mask **(D)**.
i To protect the operator's airways from airborne fragments of material.
- i* Safety eyewear is also recommended to protect the eyes from flying splinters.

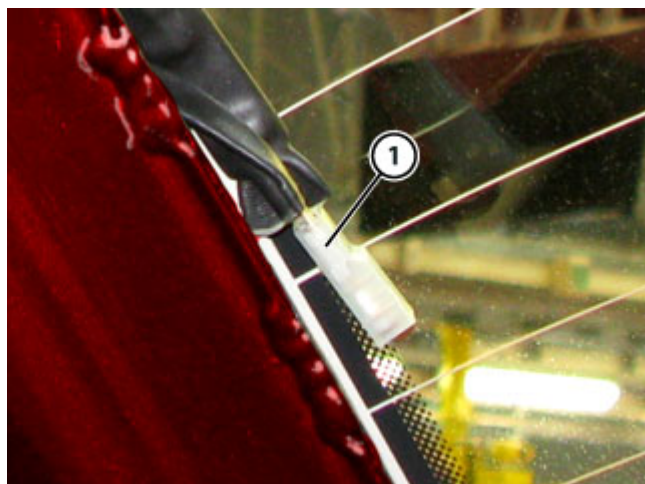


- Disconnect the connector **(1)**.

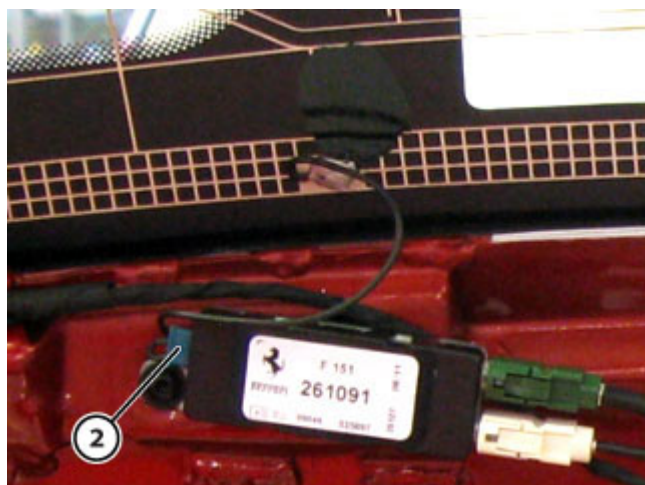

- Disconnect the connector **(2)**.

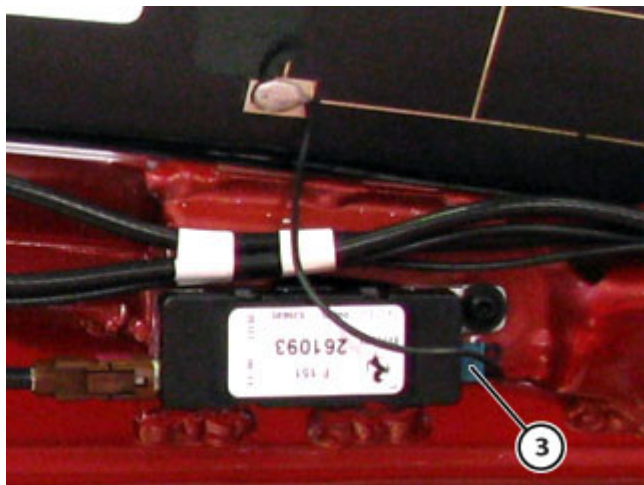**For vehicles with TV tuner**

- Disconnect the connector **(3)**.

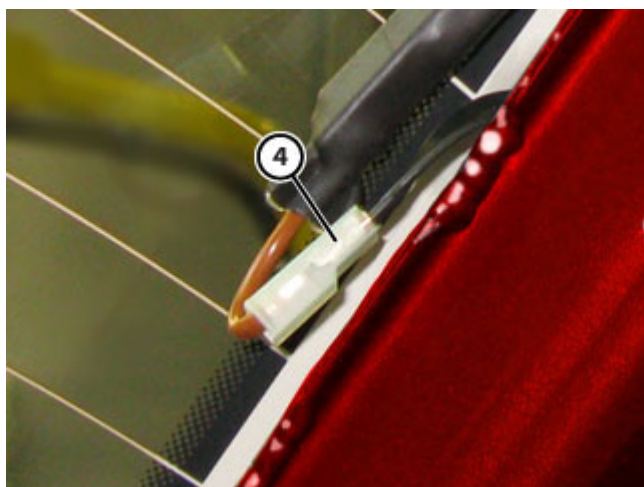

- Disconnect the connector **(4)**.



-  Always place the metal plate against the pneumatic cutter blade before performing each cut, with the edge of the plate against the bodywork so that the plate itself acts as a barrier for the pneumatic cutter blade.
-  Ensure that the metal plate slides freely, as it must move together with the pneumatic cutter during the cutting procedure.
- To cut the sealant along the edges, place the cutter blade **(C)** between the bodyshell and the glass seal.




- Use specific pneumatic cutters to cut the sealant around the entire perimeter of the rear screen glass from inside the passenger compartment.
- Using specific suction cup handles and working from the exterior of the vehicle, remove and replace the rear screen glass.



- Apply strips of adhesive tape to the bodywork, around the perimeter of the seat of the rear screen glass, to protect the bodywork itself.
-  Take care not to damage the bodywork.

- Use the (Excalibur pneumatic cutter with ESM - 519 short blade) **(A)** to remove all residue of sealant from the seat of the rear screen glass.
- Blow the seat of the rear screen glass with compressed air to clean thoroughly.
- Use **DOW BETACLEAN 3350 Black cap, code 81636700** to degrease the seat of the rear screen glass.

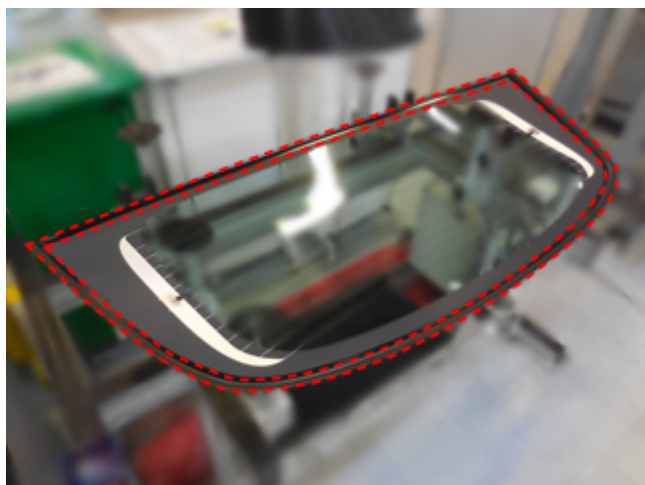

-  Check that there are no flaws or chips in the surface of the new screen and around its perimeter.
- Place the new rear screen glass carefully on a stable surface so that it is not scratched or damaged.
 - Degrease the perimeter of the glass with **DOW BETACLEAN 3300 code 81636500** and leave to dry.
-  Protect newly applied primer from draughts during work breaks. Never exceed the drying time of 8 hours.
- Apply **DOW BETAPRIME 5500 Green cap** around the entire perimeter of the rear screen glass in the area between the dotted lines.
 - Leave the product to dry for at least **5 minutes**.




Apply adhesive primer in a uniform, uninterrupted bead.


- Using an extrusion gun with a triangular section nozzle, apply a continuous bead **(5)** of **DOW BETASEAL 1812** around the perimeter of the rear screen glass, starting from the mid point of the bottom edge and overlapping the ends of the bead by approximately **20-30 mm**.
- Check that there are no bubbles or interruptions in the bead. Apply additional sealant if necessary.



The fitting of the windscreen on the bodysell must take place with no possibility of delay within 5 minutes from the application of the adhesive tape.


- Using specific suction cup handles and working from the exterior of the vehicle, fit the new rear screen glass onto the bodywork of the luggage compartment lid.
- Press around the entire perimeter of the rear screen glass.
- Use a **4 mm ± 1 mm** feeler gauge to check that the rear screen glass is aligned correctly.
- Apply a few strips of adhesive fabric tape **SYROM 90** to hold the rear screen glass in position.
- Wait at least **3 hours**.
- Remove the adhesive tape and remove any excess sealant around the rear screen glass with heptane.
- Connect the connector **(4)**.

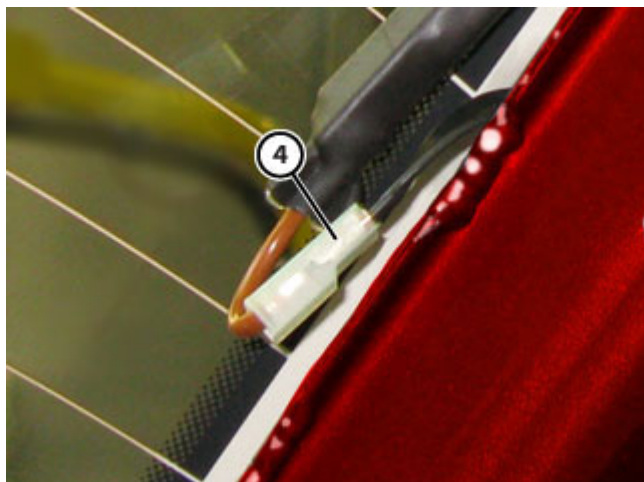

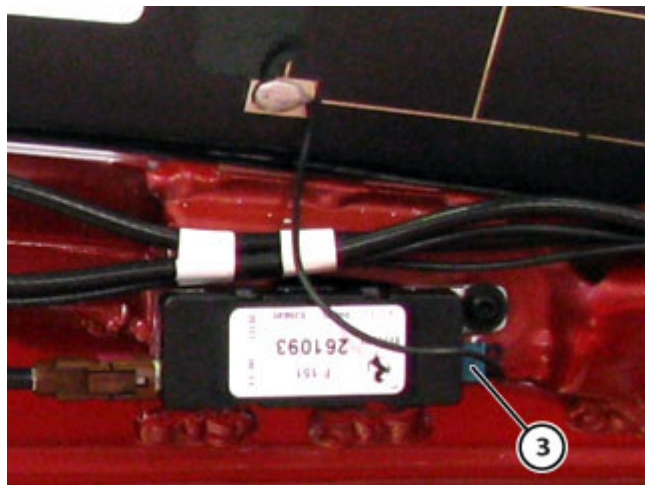


For vehicles with TV tuner

- Connect the connector (3).

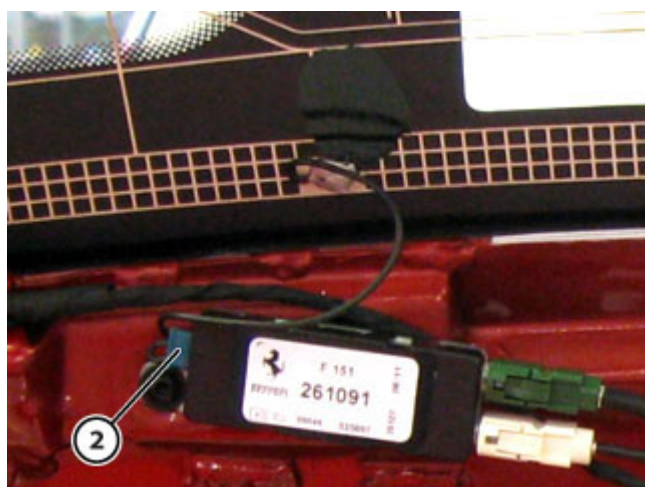

- Connect the connector (2).

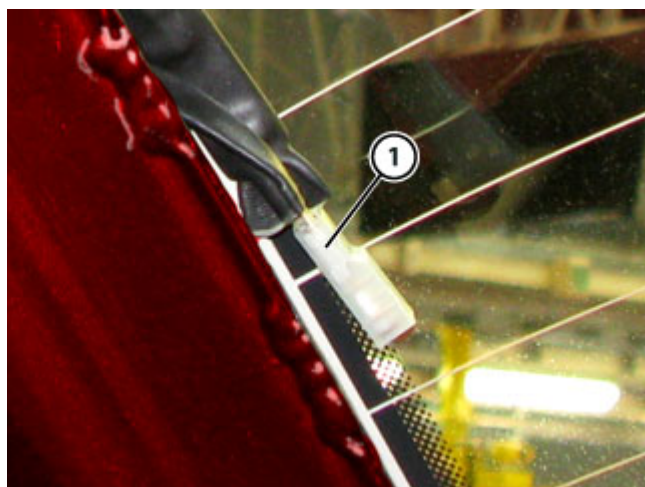

- Connect the connector (1).

➤ For vehicles with rear screen wiper. Replace the rear screen wiper unit (🔧 E3.10).

i Refit the rear screen wiper unit.

➤ Refit the luggage compartment trim panels (🔧 E4.06).

i Refit the luggage compartment trim panels.

