



GTC4Lusso USA - Windscreen wipers - Latest Update: 2021-01-26


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Ferrari S.p.A. Ferrari S.p.A. does not guarantee or accept any liability with respect to the correctness of information in this document.

Copyright by Ferrari S.p.A. - P.IVA 00159560366


E3.10 Windscreen wipers

Replacing the windscreen wiper blades

Front blades

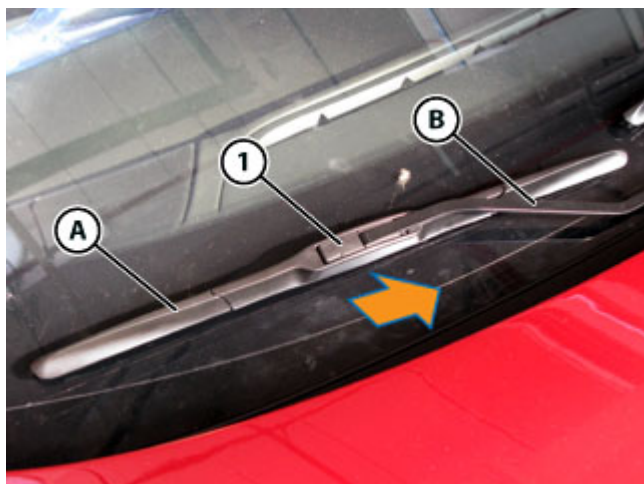


- Prise open and lift the lever (1).
- Detach and remove the blade (A) from the windscreen wiper arm (B), pressing in the direction indicated, and replace.

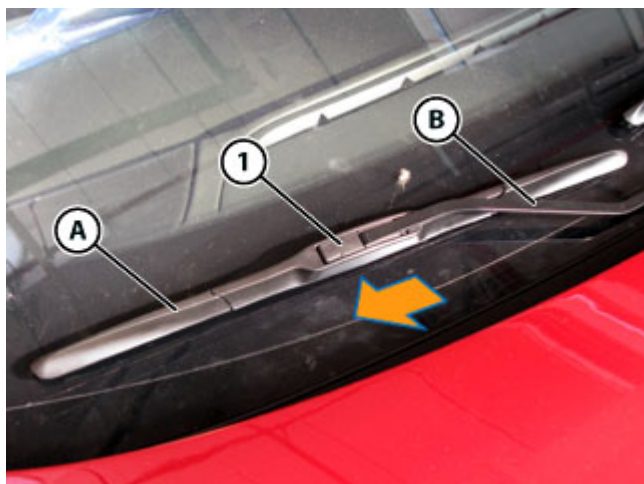


- Fit the new windscreen wiper blade (A) onto the windscreen wiper arm (B), pressing in the direction indicated.
- Press down the lever (1).

Rear blade

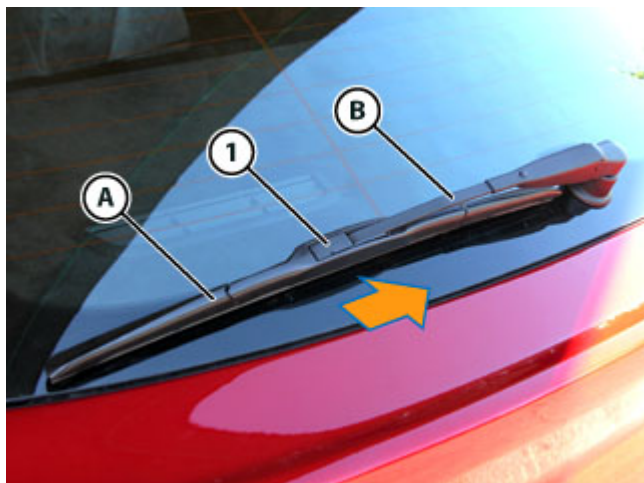

- Prise open and lift the lever **(1)**.
- Detach and remove the blade **(A)** from the windscreen wiper arm **(B)**, pressing in the direction indicated, and replace.

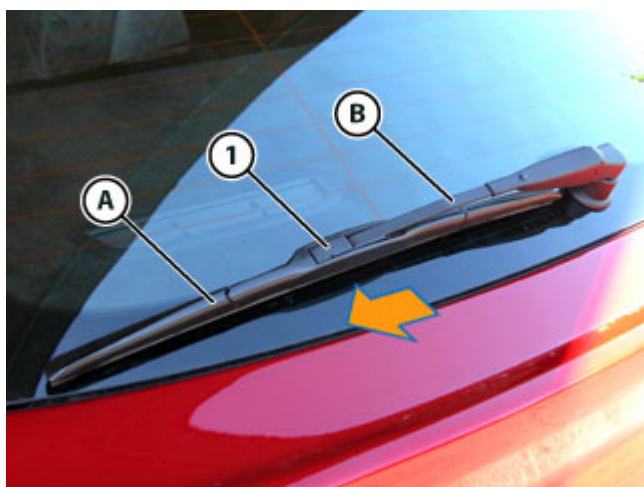

- Fit the new windscreen wiper blade **(A)** onto the windscreen wiper arm **(B)**, pressing in the direction indicated.
- Press down the lever **(1)**.

Removing the windscreen wiper arms

Front windscreen wiper arms



- Mark the positions of the wiper blades on the windscreen to ensure that the arms **(A)** are fitted correctly on the motor spindles during reassembly.
- Remove the indicated plugs.



- Undo the nuts indicated.
- Remove the arms **(A)**.

Rear windscreen arm



- Mark the position of the wiper blade on the windscreen to ensure that the arm **(A)** is fitted correctly on the motor spindle during reassembly.



- Prise open and lift the indicated cover.




- Undo the indicated nut.
- Remove the arm **(A)**.

Refitting the windscreen wiper arms


			
Tightening torque		Nm	Class
Fastening windscreen wiper arms	Nut	25 Nm	B
	Nut	9 Nm	B

Front windscreen wiper arms

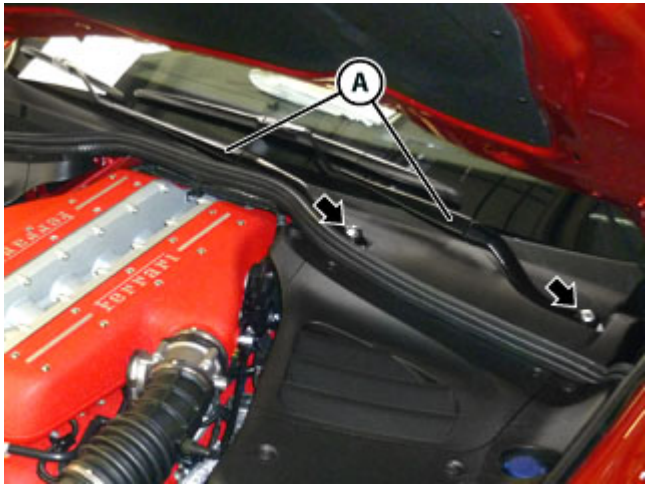

- Fit the arms **(A)**, aligning the reference markings on the windscreen.
- Replace the indicated nuts, fitting and tightening the new components.

		
Tightening torque	Nm	Class
Nut	25 Nm	B

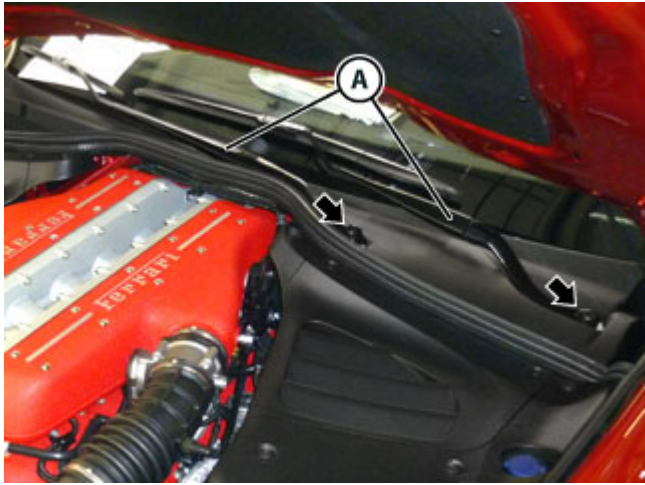

- Fit the indicated caps.

Rear windscreen arm



- Fit the arm (A), using the marking made on the rear screen as reference.
- Replace the nut, fitting and tightening the new component.

		
Tightening torque	Nm	Class
Nut	9 Nm	B




- Fit and fasten the indicated cover.

Removing the windscreen wiper unit

- Disconnect the battery (🔑 F2.01).
- Remove the engine compartment cosmetic shields (🔑 E3.14).


 Remove the left hand cosmetic underwindscreen shield.

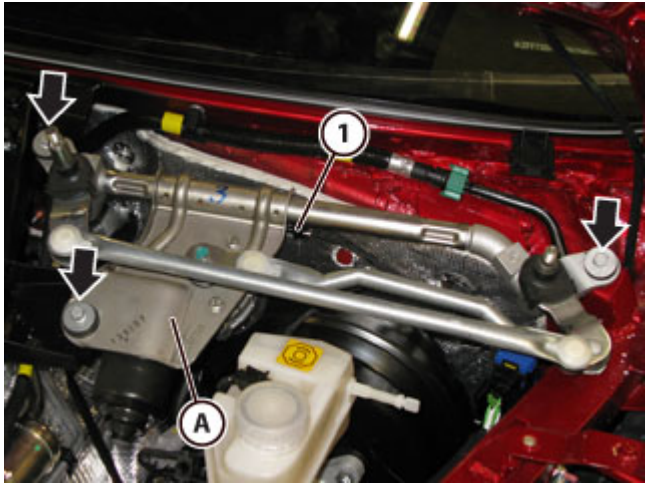

- Disconnect the connector (1).
- Undo the screws indicated.
- Remove the unit (A).

Refitting the windscreen wiper unit

			
Tightening torque		Nm	Class
Fastening windscreen wiper linkage	Screw	9 Nm	B

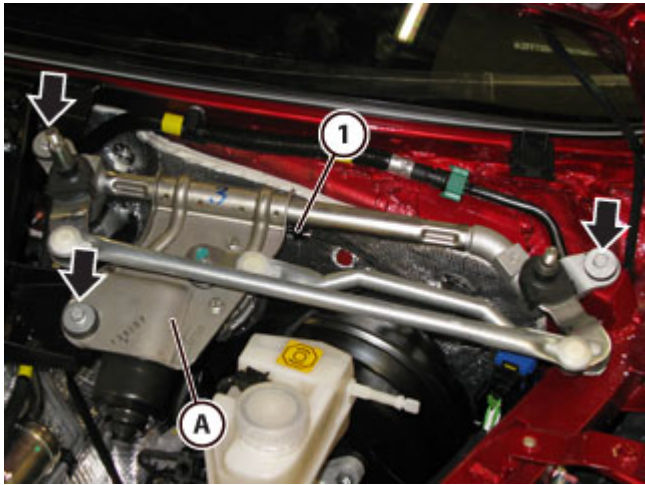

- Fit the unit (A) in the relative seat.
- Tighten the screws indicated.

		
Tightening torque	Nm	Class
Screw	9 Nm	B

- Connect the connector (1).

- Refit the engine compartment cosmetic shields ( E3.14).
-  Refit the left hand cosmetic underwindscreen shield.

- Connect the battery ( F2.01).


Replacing the rear screen wiper unit

			
Tightening torque		Nm	Class
Fastening rear screen washer unit	Screw	9 Nm	B

- Disconnect the battery (🔑 F2.01).
- Remove the luggage compartment trim panels (🔑 E4.06).
 - ❗ Remove the lower luggage compartment trim panel
- Remove the windscreen wiper arms (🔑 E3.10).
 - ❗ Remove the rear arm.



- Detach and remove cover (1).
- Detach and remove the seal (2).

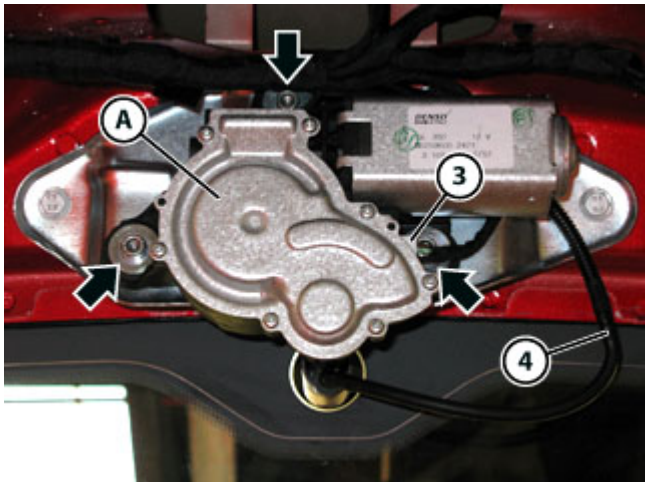

- Disconnect the connector (3).
- Disconnect the pipe (4).
- Undo the screws indicated.
- Remove the unit (A) and replace.
- Fit the new unit (A).
- Tighten the indicated screws, keeping the spindle of the wiper motor unit (A) at the centre of the respective hole.

		
Tightening torque	Nm	Class
Screw	9 Nm	B

- Connect pipe (4).
- Connect the connector (3).



- Fit and fasten the seal (2).
- Fit the cover (1).

➤ Refit the windscreen wiper arms (🔧 E3.10).

i Refit the rear arm.

➤ Refit the luggage compartment trim panels (🔧 E4.06).

i Refit the lower luggage compartment trim panel.

➤ Connect the battery (🔧 F2.01).