


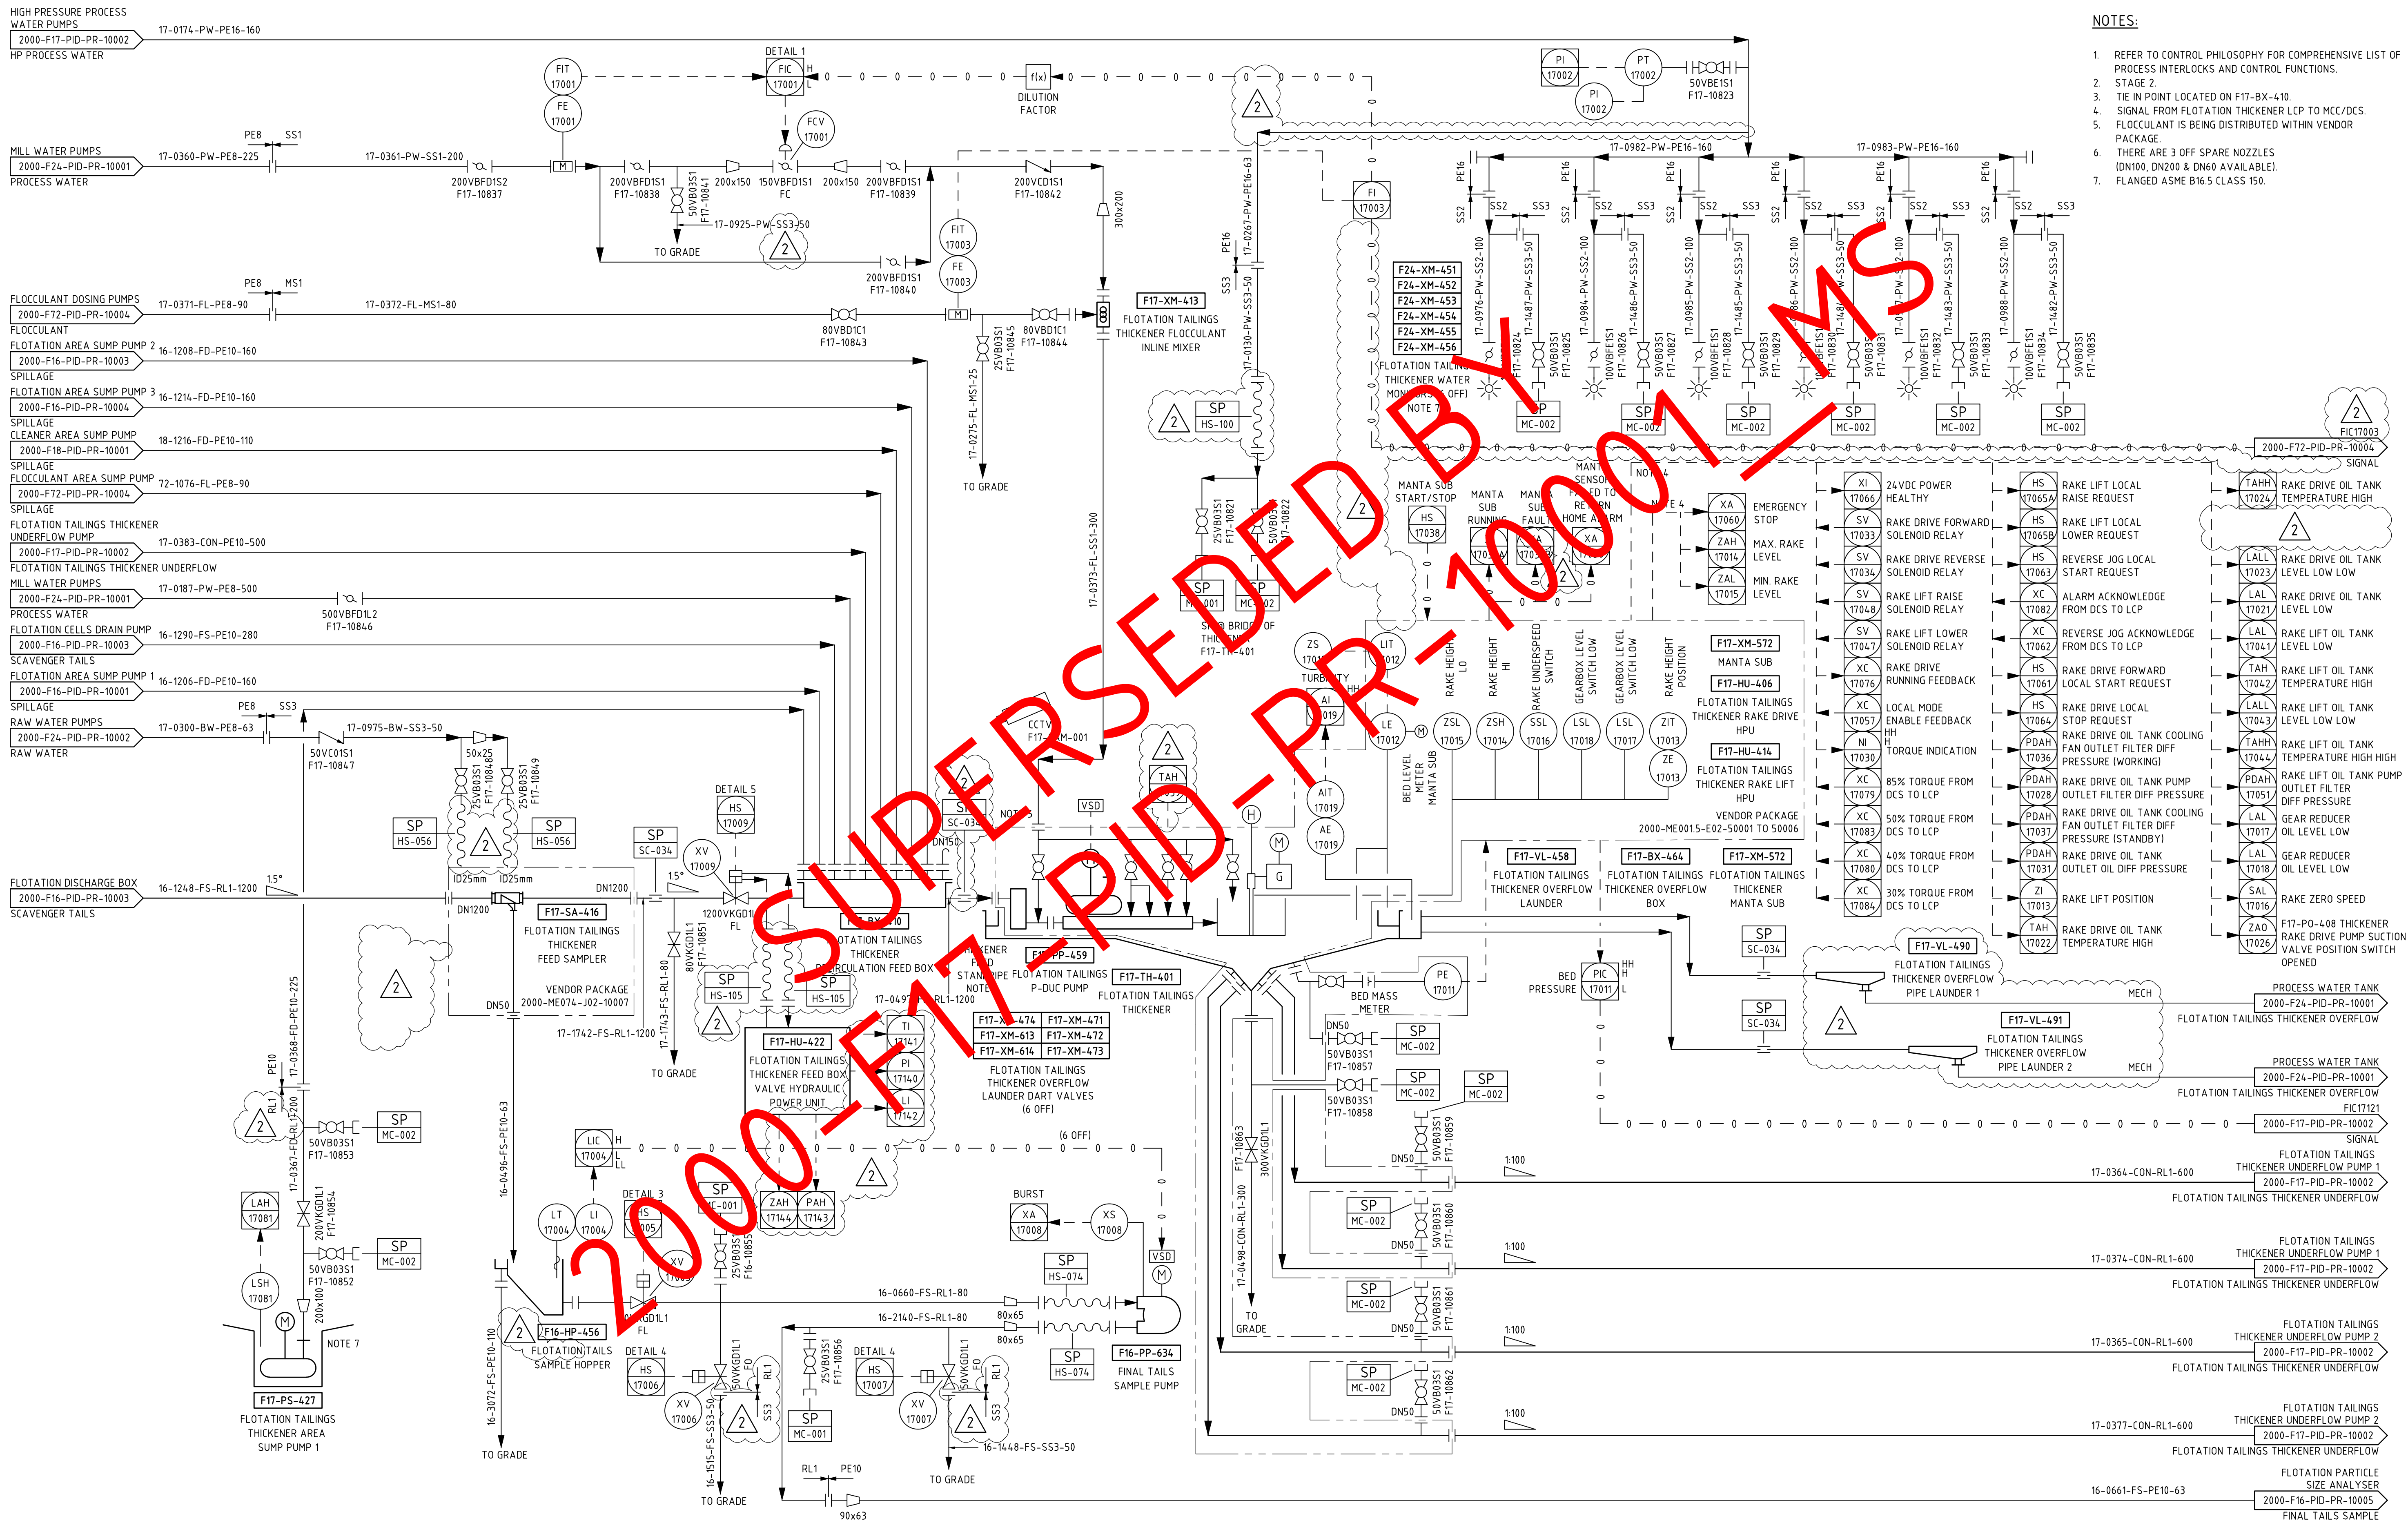

- NOTES:
1. REFER TO CONTROL PHILOSOPHY FOR COMPREHENSIVE LIST OF PROCESS INTERLOCKS AND CONTROL FUNCTIONS.
 2. STAGE 2.
 3. TIE IN POINT LOCATED ON F17-BX-410.
 4. SIGNAL FROM FLOTATION THICKENER LCP TO MCC/DCS.
 5. FLOCCULANT IS BEING DISTRIBUTED WITHIN VENDOR PACKAGE.
 6. THERE ARE 3 OFF SPARE NOZZLES (DN100, DN200 & DN60 AVAILABLE).
 7. FLANGED ASME B16.5 CLASS 150.