


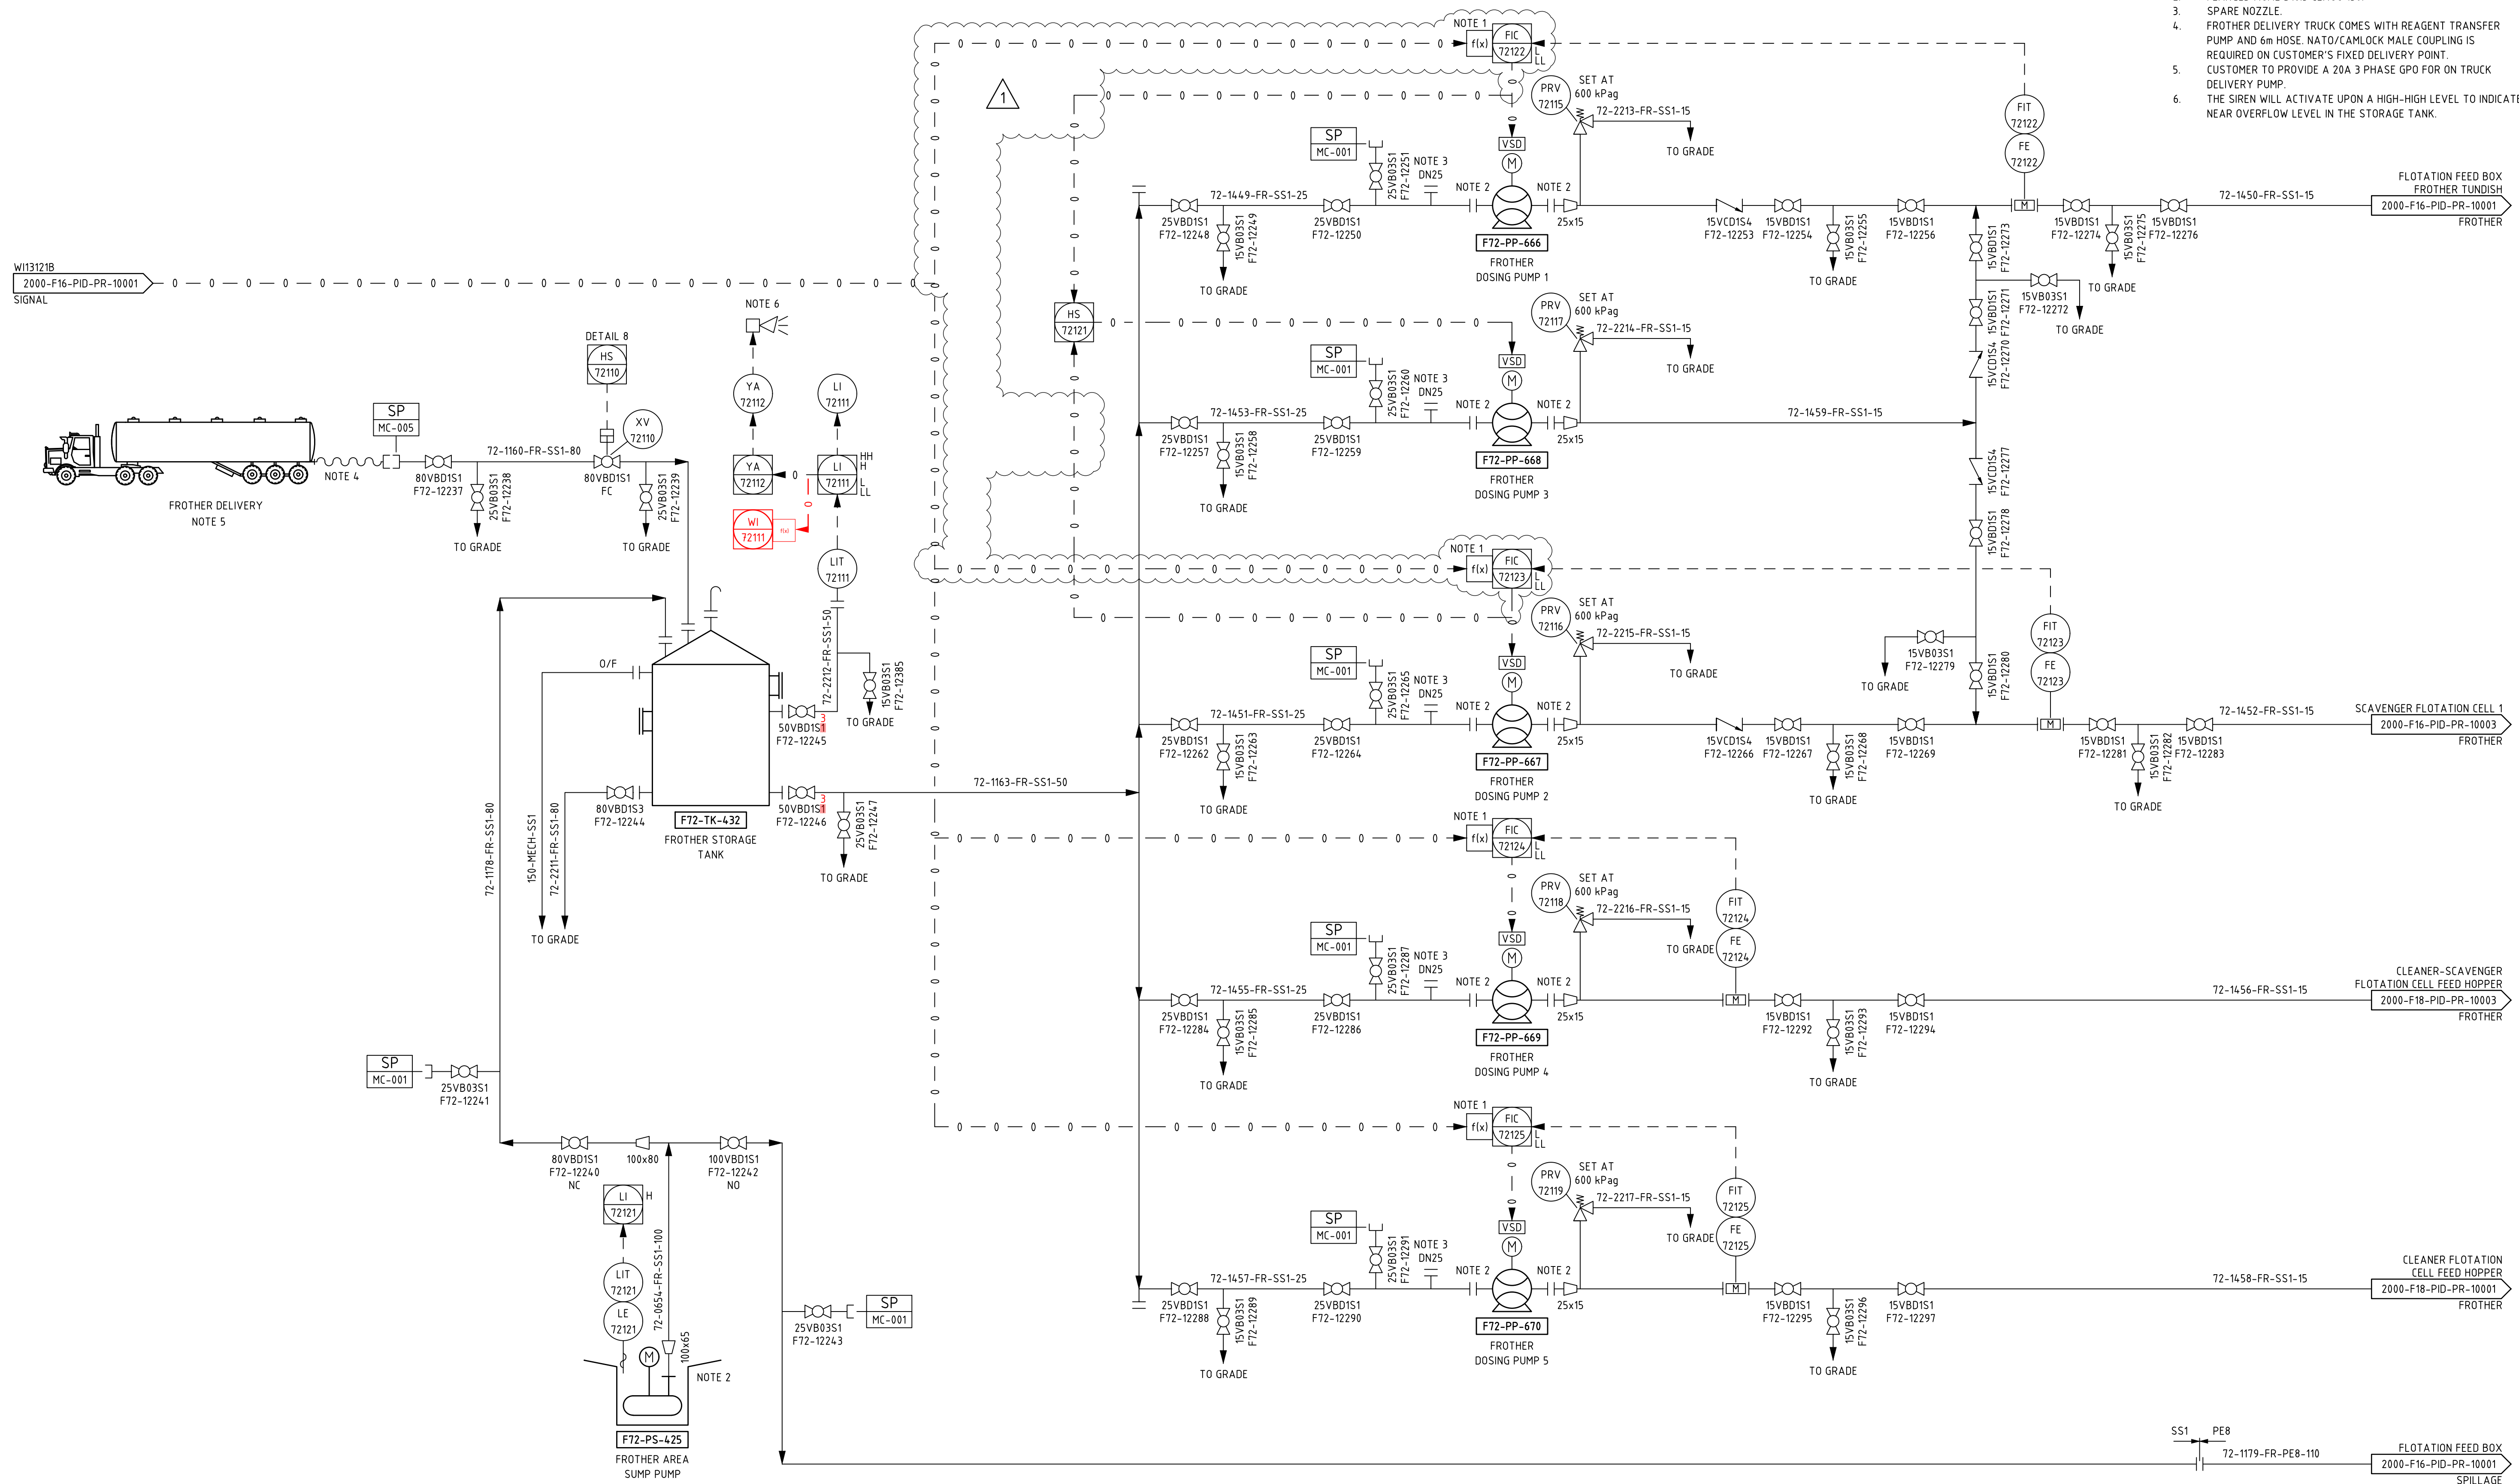

NOTES:

1. CALCULATION WILL CONVERT FRESH SOLIDS RATE TO A REAGENT FLOWRATE.
2. FLANGED ASME B16.5 CLASS 150.
3. SPARE NOZZLE.
4. FROTHER DELIVERY TRUCK COMES WITH REAGENT TRANSFER PUMP AND 6m HOSE. NATO/CAMLOCK MALE COUPLING IS REQUIRED ON CUSTOMER'S FIXED DELIVERY POINT.
5. CUSTOMER TO PROVIDE A 20A 3 PHASE GPO FOR ON TRUCK DELIVERY PUMP.
6. THE SIREN WILL ACTIVATE UPON A HIGH-HIGH LEVEL TO INDICATE NEAR OVERFLOW LEVEL IN THE STORAGE TANK.