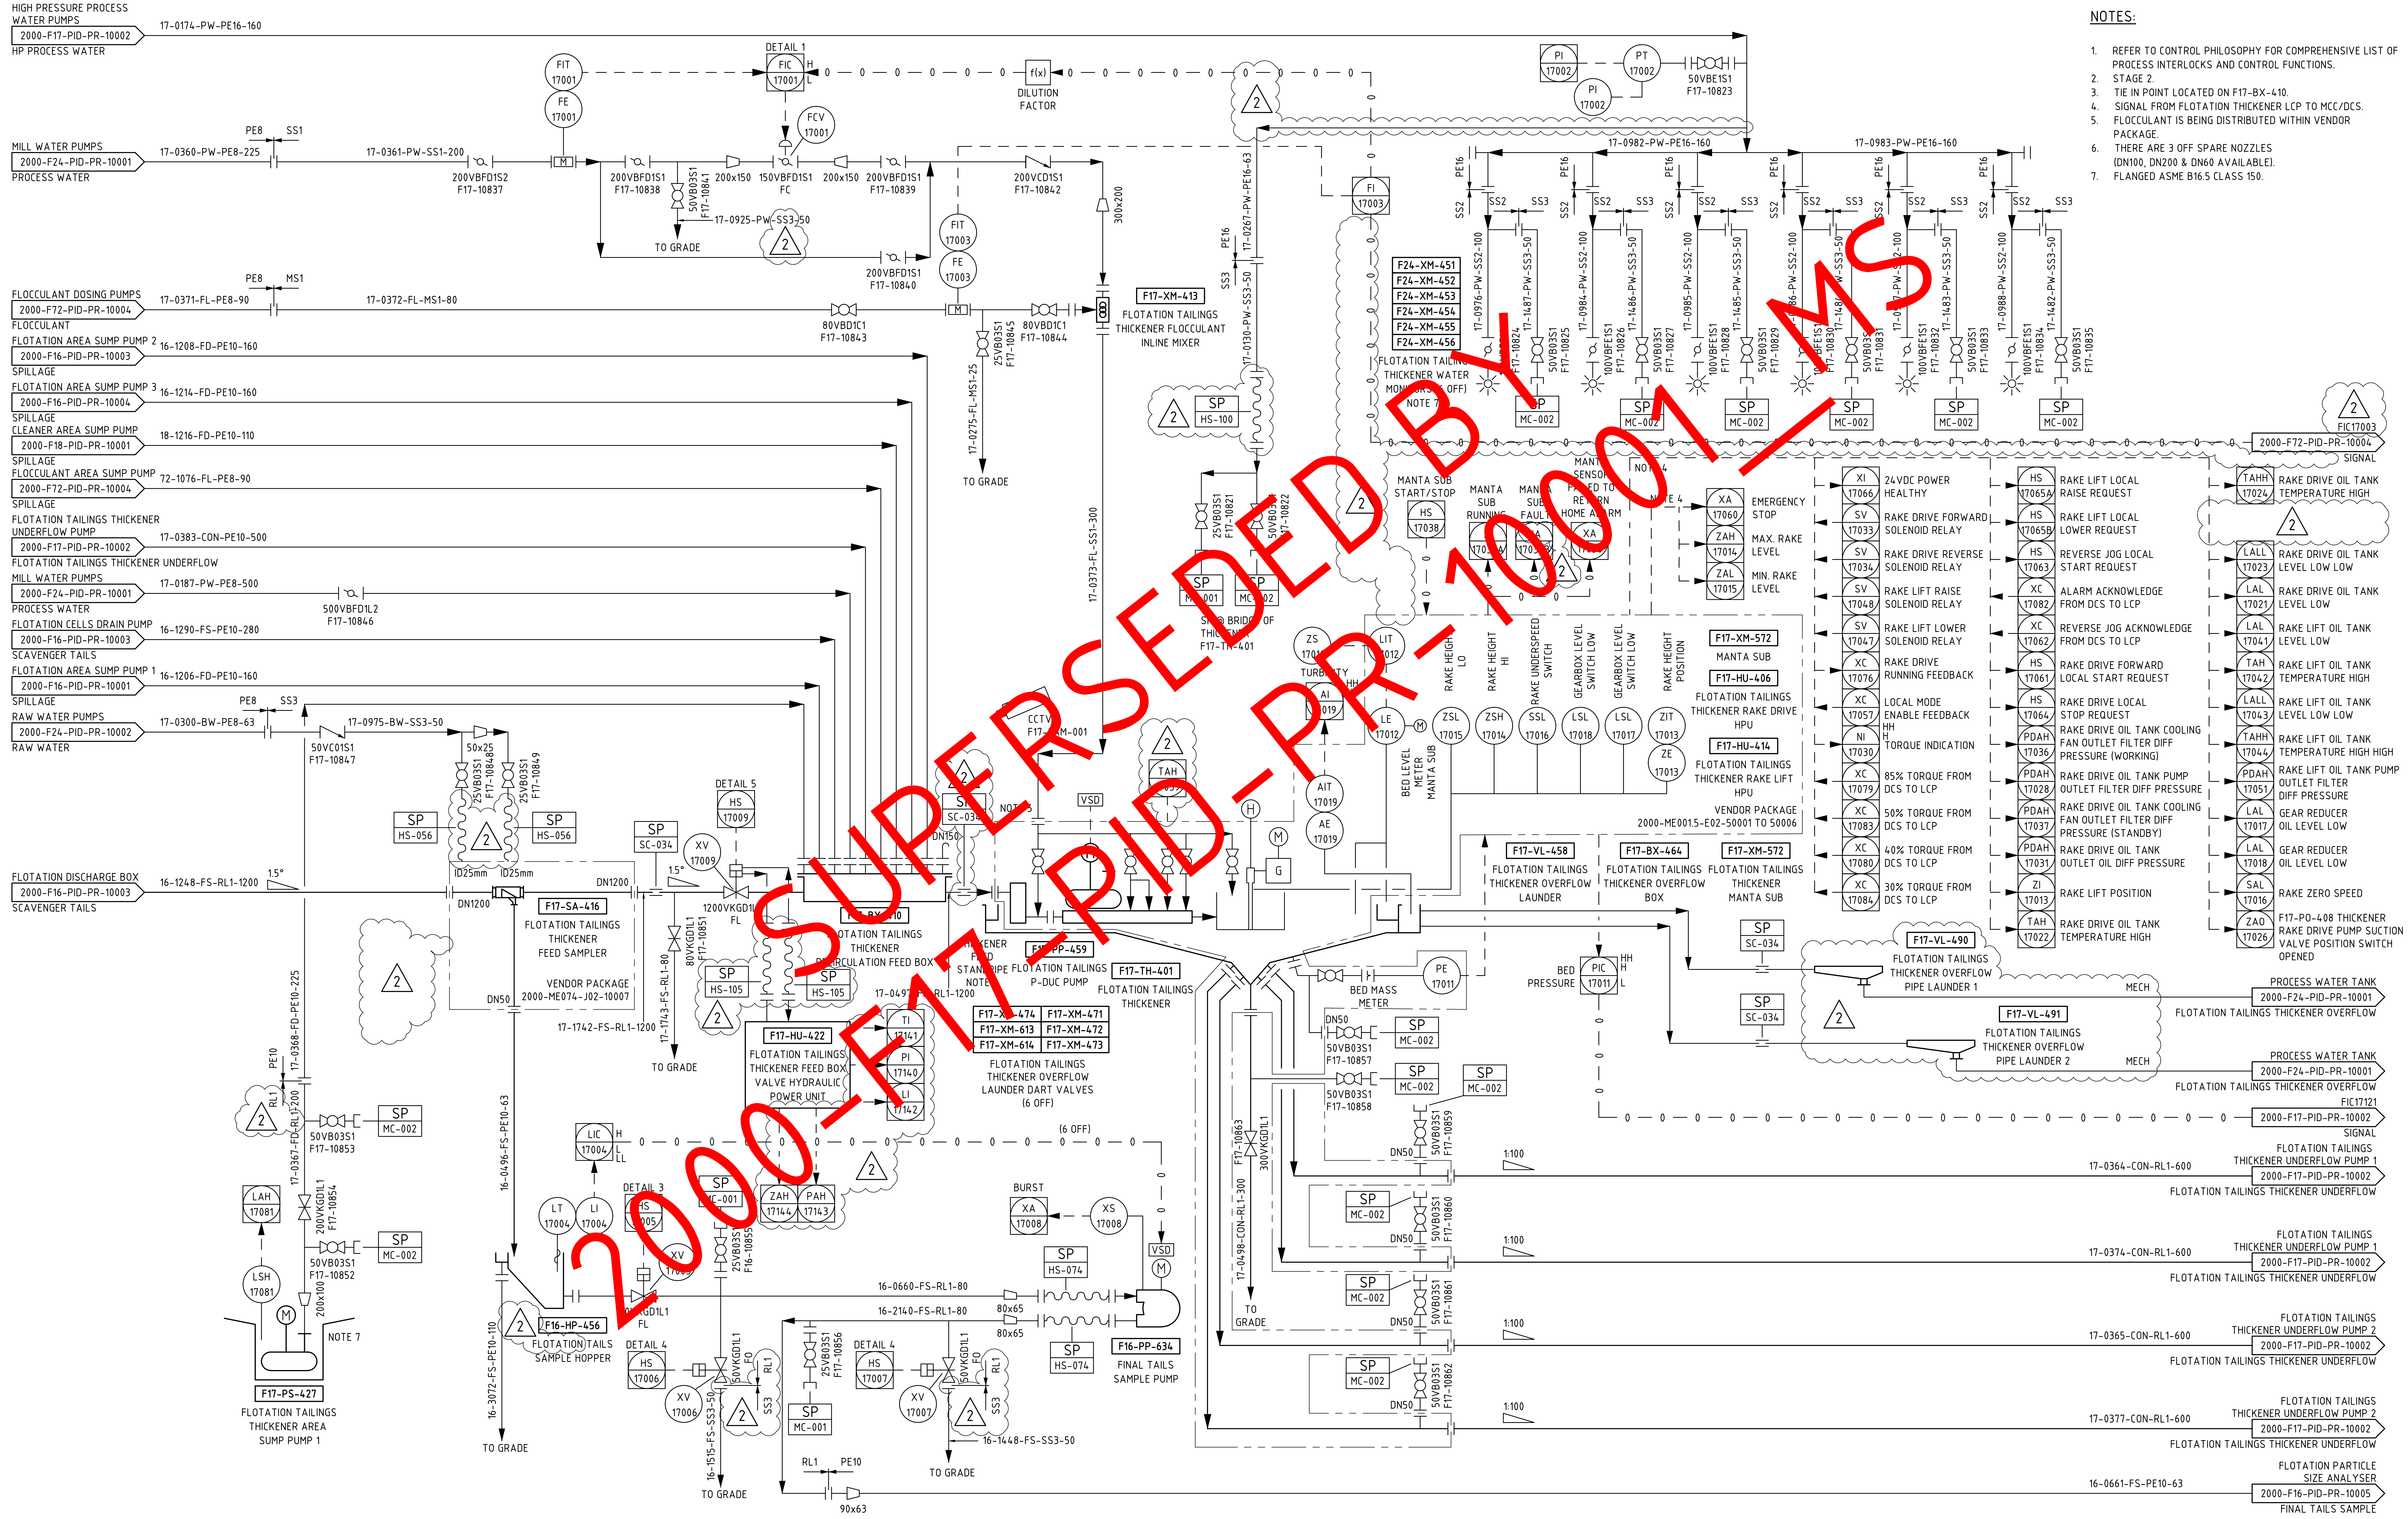

NOTES:

1. REFER TO CONTROL PHILOSOPHY FOR COMPREHENSIVE LIST OF PROCESS INTERLOCKS AND CONTROL FUNCTIONS.
2. STAGE 2.
3. TIE IN POINT LOCATED ON F17-BX-410.
4. SIGNAL FROM FLOTATION THICKENER LCP TO MCC/DCS.
5. FLOCCULANT IS BEING DISTRIBUTED WITHIN VENDOR PACKAGE.
6. THERE ARE 3 OFF SPARE NOZZLES (DN100, DN200 & DN60 AVAILABLE).
7. FLANGED ASME B16.5 CLASS 150.

SUPERSEDED BY 2000-F17-PID-PR-10001 MS