


	DRIVE No.	NAME	MODULE No.	FERRULE PREFIX	DCS START OUTPUT	DCS STOP INPUT	DCS START INPUT	DCS FAULT INPUT	DCS RUN INPUT
	30-SC-63	CIL 3 STRIPPED CARBON SIZING SCREEN		SC63	%Z055129	%Z052423	%Z052424	%Z052425	%Z052426
SPARE	65-SC-65	CARBON RECOVERY SCREEN	2R/6	SC65	%Z055109	%Z052201	%Z052202	%Z052203	%Z052204

	DRIVE No.	DB No	DCS PANEL	24V CB No
	30-SC-63	30-PC-62	DF	A11
SPARE	65-SC-65	30-PC-62	DF	A14

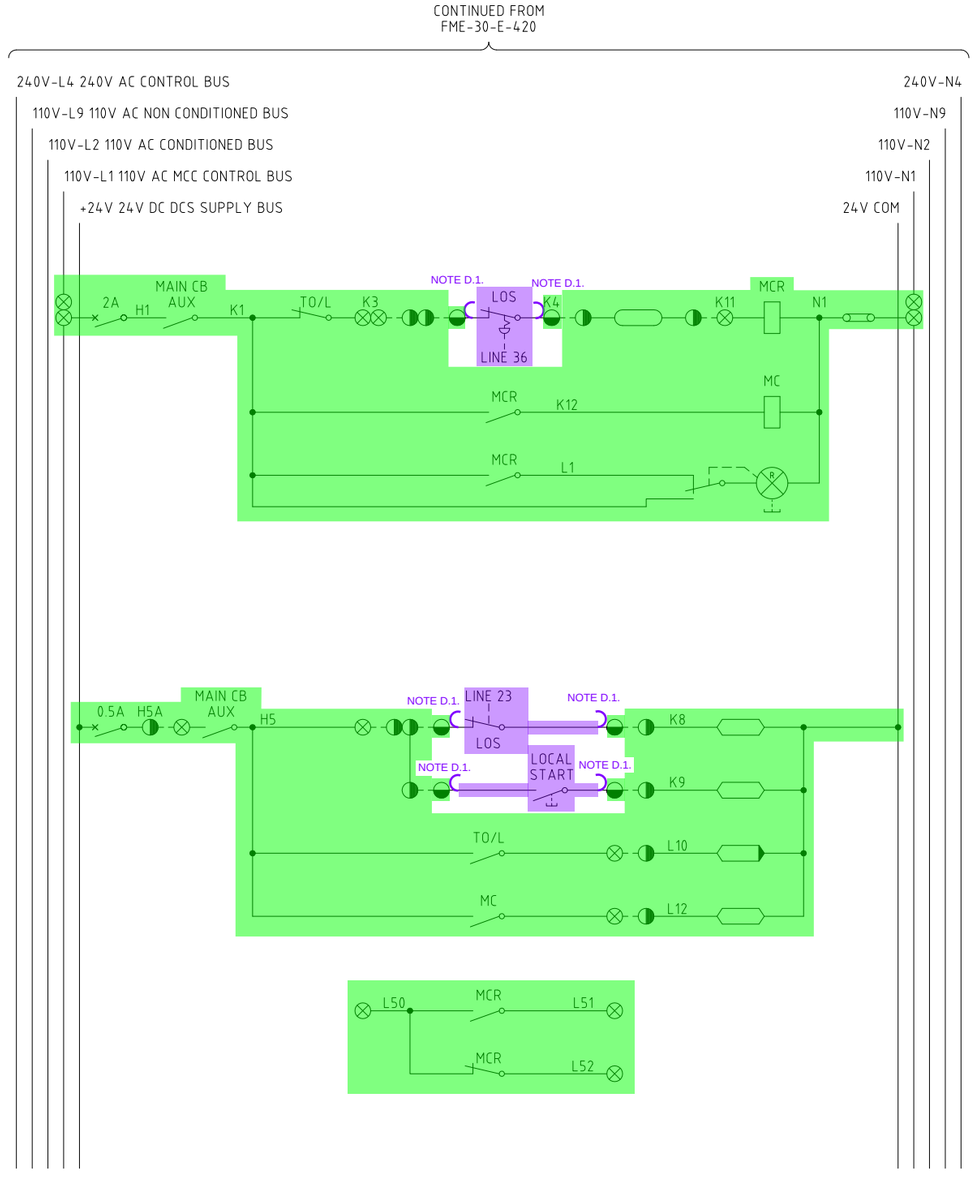

KCGM GROWTH PROJECT DEMOLITION NOTES

D.1. MOTOR AND THERMISTOR CABLES TO BE DISCONNECTED AND MADE SAFE.

LEGEND

- STAGE 1 - NEW
- STAGE 1 - REMOVE
- STAGE 1 - DECOMMISSIONED (OTHERS)
- STAGE 2 - NEW
- STAGE 2 - REMOVE
- STAGE 2 - DECOMMISSIONED (OTHERS)

KCGM GROWTH PROJECT

DRAWING NO.
2000-F30-SCM-EL-10055

REV	DATE	DESCRIPTION	CHECK	TECH APP
0	12/11/25	APPROVED FOR CONSTRUCTION		MB/DM

	110V-L1	
	110V-L1	
	110V-N1	
	110V-N1	
	K3	
	K3	
	K11	
	H5	
	H5A	
	L10	
	L12	
	L50	
	L51	
	L52	

MCC TERMINAL ARRANGEMENT

LEGEND

TERMINALS
- MOTOR CONTROL CENTRE (MCC)
- FIELD
- PROCESS CONTROL CUBICLE (30-PC-63)
- LINE CONDITIONER
- VARIABLE SPEED DRIVE
- DISTRIBUTION BOARD

DIGITAL FUNCTIONS
- DCS INPUT
- DCS INPUT WITH ALARM FUNCTION
- DCS OUTPUT

ANALOGUE FUNCTION
- 4-20mA INPUT
- 4-20mA OUTPUT

ANCILLARY EQUIPMENT
- CONTACT - NORMALLY CLOSED
- CONTACT - NORMALLY OPEN
- LIMIT SWITCH
- CONTACTOR
- PUSH BUTTON
- LOS (LOCK OFF STOP)
- RELAY
- LINK
- CIRCUIT BREAKER
- THERMISTOR
- INDICATION LAMP R RED, G GREEN, A AMBER
- SIREN
- HORN

NOTES

1. ALL WIRES EXCEPT CONTROL SUPPLIES & THOSE WITHIN FORM 4 MODULES SHALL BE FERRULED WITH PREFIX LISTED IN ABOVE TABLE.

CLIENT APPROVED for CONSTRUCTION

DATE: 24/03/95 SIGNED: S. ELANGSINGHE

2000-F30-SCM-EL-10055_Rev0

Carbon in leach (CIL3) 415V MCC 30-SW-63 schematic and termination diagram