



# Hybrid Stepper Motor ESM.8696.64MD

## Mechanical Dimensions:

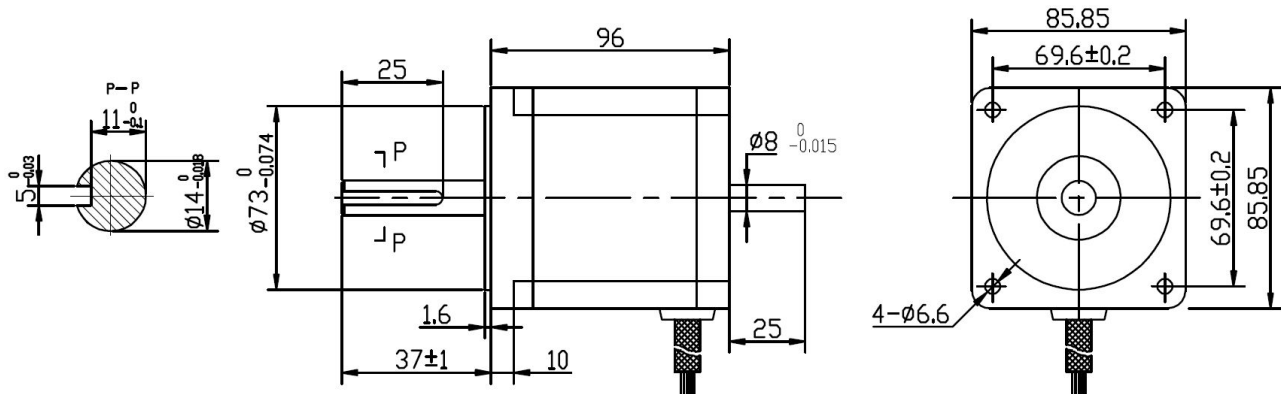

Test conditions:  
Stepper motor driver: Leadshine AM882  
Connection: Bipolar parallel  
Stepping mode: Full step

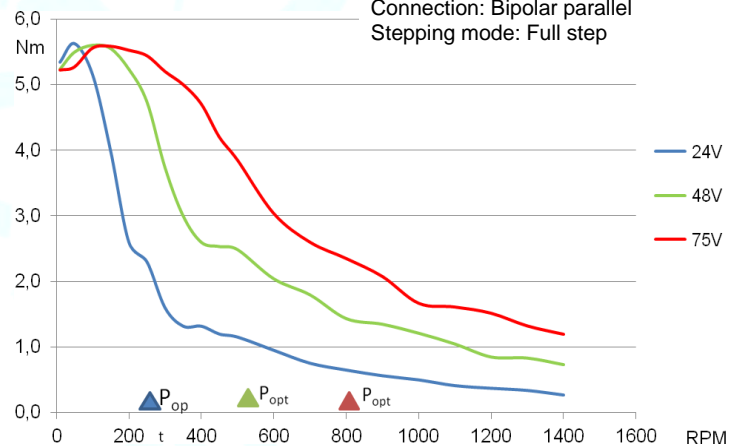

## Electrical Specifications:

	Unipolar	Bipolar Serial	Bipolar Parallel
No. of phases	4	2	2
Step Angle	1.8 ± 0.09°		
Rated Voltage (V)	4.2	6	3
Current (A)	4.5	3.2	6.4
Resistance (Ω)	0.94	1.88	0.47
Inductance (mH)	4.2	16.8	4.2
Holding Torque coils on DC (Nm)	5.8	8.2	8.2
Holding Torque step mode (Nm)	4.1	5.8	5.8
Rotor Inertia (kgcm <sup>2</sup> )	2.7		
Insulation Class	B		
Insulation Resistance	100MΩ. 500VDC		
Weight (kg)	3		