



中国认可
国际互认
检测
TESTING
CNAS L4743

检测报告

报告号: AJFS2104003183FF-01_CN 日期: 2021 年 4 月 28 日 第 1 页 共 11 页

湖北南北车新材料有限公司

湖北省襄阳市高新技术开发区航天路 7 号

本测试结果拷贝发布日期为 2021 年 4 月 28 日编号为 AJFS2104003183FF_CN 的检测报告。只有原件报告在法律上是合法的并能用于法定用途。

此报告是报告号为 AJFS2104003183FF-01 的中文译本, 如中英文有差异, 概以英文为准。

样品名称: 8955 聚氨酯粘接胶

SGS 参考号: WHIN2104001502SC

型号/货号: /

以上测试样品数据和信息为客户提供并确认, SGS 不对这些数据和信息的真实性、完整性以及由此引发的结果和/或结论的有效性负责。检测结果适用于收到的样品。

测试要求:

EN 45545-2:2013+A1:2015 铁路应用—轨道车辆消防保护 第 2 部分: 材料及部件的防火性能要求, 测试参照表格 5—材料要求 (R1)

测试结果: -- 参见数据附表 --

测试持续时间:

样品收到日期 : 2021 年 4 月 19 日

测试执行时间 : 2021 年 4 月 19 日 至 2021 年 4 月 26 日

通标标准技术服务有限公司安吉分公司

授权代表签署

邹石龙
实验室经理



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC (Shanghai) Technical Services Co., Ltd.
Anji Branch Fire Technology Service

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

检测报告

报告号: AJFS2104003183FF-01_CN 日期: 2021 年 4 月 28 日 第 2 页 共 11 页

I. 样品信息

样品描述	胶+铝板
颜色	黑色 / 银色
暴露 (测试) 面	黑色面
样品尺寸	T02 ISO 5658-2: 约 800mm×155mm×2.8mm
	T03.01 ISO 5660-1: 约 100mm×100mm×2.8mm
	T10.01/ T10.02/ T11.01: 约 75mm×75mm×2.8mm
基材	铝板 / 2.0mm / 银色

II. 结果概要

要求简称(适用部分)	参考测试方法	参数单位	测试结果 *
R1 (IN1A; IN1B; IN1D; IN1E; IN4; IN5; IN6A; IN7; IN8; IN9B; IN11; IN12A; IN12B; IN14; F5)	T02 ISO 5658-2	CFE kW/m ²	50.0
	T03.01 ISO 5660-1: 50 kW/m ²	MARHE kW/m ²	0.9
	T10.01 EN ISO 5659-2: 50 kW/m ²	D _s (4) 无量纲	0.7
	T10.02 EN ISO 5659-2: 50 kW/m ²	VOF ₄ min	1.7
	T11.01 EN ISO 5659-2: 50 kW/m ²	CIT _G 无量纲	0.022

* 测试详细信息, 参见本报告的附录。

III. 结论

根据测试结果, 送检样品符合R1 (详见EN 45545-2:2013+A1:2015表格5) 中有关HL3危险等级。

接下页...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

检测报告

报告号: AJFS2104003183FF-01_CN 日期: 2021 年 4 月 28 日 第 3 页 共 11 页

测试要求 EN 45545-2:2013+A1:2015 表 5 材料综合要求 (R1)

要求简称 (适用部分)	参考测试方法	参数单位	定义要求	HL1	HL2	HL3
R1 (IN1A; IN1B; IN1D; IN1E; IN4; IN5; IN6A; IN7; IN8; IN9B; IN11; IN12A; IN12B; IN14; F5)	T02 ISO 5658-2	CFE kW/m ²	最小	20 a	20 a	20 a
	T03.01 ISO 5660-1: 50 kW/m ²	MARHE kW/m ²	最大	a -	90	60
	T10.01 EN ISO 5659-2: 50 kW/m ²	D _s (4) 无量纲	最大	600	300	150
	T10.02 EN ISO 5659-2: 50 kW/m ²	VOF ₄ min	最大	1200	600	300
	T11.01 EN ISO 5659-2: 50 kW/m ²	CIT _G 无量纲	最大	1.2	0.9	0.75

a 根据EN45545-2:2013+A1:2015条款5.3.7, 进行ISO5658-2测试时, 如果出现燃烧的滴落物或碎片, 或者在特殊情况下ISO 5658-2测试材料未点燃, 而结果为不能分级, 应增加如下要求:

根据EN ISO 11925-2, 施加30s点火时间。

可接受的条件是

--- 60s内火焰传播 < 150mm;

--- 没有燃烧的滴落物或者碎片

陈述:

此符合性声明仅基于本次实验室活动的实际值, 未将本次实验室活动的结果不确定度影响计入。

本试验结果得出的产品性能是在特殊条件下的检验结果。在实际应用中, 它们不能单独作为评价该产品潜在火灾危险性的依据。

本测试结果仅代表被测试样。

接下页...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

检测报告

报告号: AJFS2104003183FF-01_CN 日期: 2021 年 4 月 28 日 第 4 页 共 11 页

附录 1: T02 ISO 5658-2:2006 侧面火蔓延试验

1. 预处理

T: 23±2℃, R.H: 50±5%条件下, 样品处理至重量恒定状态。

2. 测试结果

样品编号:	1		持续燃烧 热值 (MJ/m²)	2		持续燃烧 热值 (MJ/m²)	3		持续燃烧 热值 (MJ/m²)
重量 (g)	854.3			858.4			849.9		
点燃时间: (min:sec)	0:33			0:28			0:30		
传播的时间	min	sec		min	sec		min	sec	
50 mm	-	-	-	-	-	-	-	-	
100 mm	-	-	-	-	-	-	-	-	
150 mm	-	-	-	-	-	-	-	-	
200 mm	-	-	-	-	-	-	-	-	
250 mm	-	-	-	-	-	-	-	-	
300 mm	-	-	-	-	-	-	-	-	
350 mm	-	-	-	-	-	-	-	-	
400 mm	-	-	-	-	-	-	-	-	
450 mm	-	-	-	-	-	-	-	-	
500mm	-	-	-	-	-	-	-	-	
550 mm	-	-	-	-	-	-	-	-	
600 mm	-	-	-	-	-	-	-	-	
650 mm	-	-	-	-	-	-	-	-	
700 mm	-	-	-	-	-	-	-	-	
750 mm	-	-	-	-	-	-	-	-	
测试时间 (min:sec)	10:33			10:28			10:30		
最终传播距离 (mm)	30			30			40		
CFE (kW/m²)	50.0			50.0			50.0		

测试观察: 无

根据每一个试样的试验数据计算出下表参数

参数	样品编号				均值
	1	2	3	4	
平均持续燃烧热值(Qsb) (MJ/m ²)	-	-	-	-	-
火焰熄灭时的临界辐射通量 (CFE) (kW/m ²)	50.0	50.0	50.0	50.0	50.0

注: “-”表示火焰未传播至 150mm 处。

接下页...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC 检测技术有限公司
Anji Branch Fire Technology Service

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

检测报告

报告号: AJFS2104003183FF-01_CN 日期: 2021 年 4 月 28 日 第 5 页 共 11 页

附录 2: T03.01 ISO 5660-1:2015/Amd.1:2019 对火反应试验 热释放、产烟量及质量损失率

第 1 部分:热释放速率(锥形量热仪法)和产烟速率(动态测量), 辐射照度: 50 kW/m²

1. 预处理

T: 23±2°C, R.H: 50±5%条件下, 样品处理至重量恒定状态。

2. 测试结果

测试方向	水平			
样品暴露面积 / m ²	0.0088			
辐射照度 / (kW/m ²)	50			
加热锥底板与试样上表面之间的距离 / (mm)	25			
样品编号	1	2	3	平均值
样品初始质量 / g	64.0	60.1	68.8	64.3
点燃时样品质量 / g	—	—	—	—
剩余样品质量 / g	62.1	58.2	67.1	62.5
样品质量损失 / g/m ²	210.0	220	190.0	206.7
平均质量损失速率 $\dot{m}$ / (g·m ⁻² ·s ⁻¹)	0.2	0.2	0.2	0.2
单位面积平均质量损失速率 $\dot{m}_{A,10-90}$ / (g·m ⁻² ·s ⁻¹)	0.2	0.2	0.3	0.2
闪燃或短暂燃烧发生时间/s	—	—	—	—
持续火焰发生时间 / s	—	—	—	—
是否重新插入点火器 ¹⁾	否	否	否	—
热释放速率峰值 / (kW/m ²)	1.1	1.9	2.2	1.8
引燃后单位面积 180s 热释放速率 / (kW/m ²) ²⁾	—	—	—	—
引燃后单位面积 300s 热释放速率 / (kW/m ²)	—	—	—	—
热释放总量 / (MJ/m ²)	0.7	0.8	0.9	0.8
平均有效热释放 / (MJ/kg)	—	—	—	—
引燃前, 单位面积总产烟量 / m ² m ⁻²	33.7	35.6	54.3	41.2
引燃后, 单位面积总产烟量 / m ² m ⁻²	—	—	—	—
测试持续时间 / s ³⁾	1200.0	1200.0	1200.0	1200.0
最大平均热释放速率 (MARHE) / KW/m ²	0.6	0.8	1.2	0.9
测试现象 ⁴⁾	---			
特殊的安装程 ⁵⁾	f			
该样品是否适用本方 ⁸⁾	适用			

* 样品未点燃。

接下页...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC 安标技术服务(浙江)有限公司
Anji Branch Fire Technology Service

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

检测报告

报告号: AJFS2104003183FF-01_CN 日期: 2021 年 4 月 28 日 第 6 页 共 11 页

备注:

- 1) 如果在移开火花器60s内, 火焰熄灭, 在5s内再次插入火花器, 并保持到测试结束。
- 2) 应对3个试样在180s内的平均热释放速率进行比较, 若其中的一个与这3个的平均值之差超过10%, 则应另取3个试样进行试验, 除非其平均值小于10 kW m⁻²。
- 3) 试验终止条件:
数据采集间隔应为2 s, 数据采集应在20 min时终止。
- 4) 观察和记录其他测试现象, 如熔化、膨胀、变形爆裂等。
- 5) 采用的特殊安装程序:
 - ☐ a. 如果试样因膨胀或变形, 在引燃前接触到火花塞, 或引燃之后接触到辐射锥下表面, 这种情况下应使辐射锥的下表面和试样表面有60mm的间隔;
 - ☐ b. 其他尺寸不稳定的制品(例如试验期间卷曲或收缩), 应采用4根金属丝限制其过分的变形。用一根金属丝将试样安装架和定位架组件缠紧, 并保证与组件的4个边之一平行, 且距离约为20mm。将金属丝两端拧紧, 使金属丝和定位架固定。试验前去掉金属丝多余部分。其余3根金属丝应以相同的方式固定, 并分别与其余3条边平行;
 - ☐ c. 如果4根铁丝无法控制样品的剧烈变形, 测试时需要使用直径 (0,8 ± 0,1) mm, 间距 (20 ± 2) mm 的铁丝网;
 - ☐ d. 样品膨胀熔化成液态会导致熔融物溢出边框, 或者填充到样品保持架和样品架之间, 这种测试结果是无效的。因此这类材料测试时不能使用样品保持架, 并封装在0.1mm厚的铝箔托盘内(边缘超出样品顶部10mm);
 - ☐ e. 材料如纤维, 需要物理约束或者压缩至一定的安装密度, 测试时需使用直径(1,0 ± 0,1) mm, 间距 (9 ± 1) mm构成的铁丝支架结构
 - ☒ f. 没有使用特殊的安装程序
- 6) 图1: 单位面积热释放速率曲线(kW/m²)。
- 7) 孔板系数为 0.043; 排气流量为 0.024 ± 0.002 m³/s。
- 8) 如果在加热锥底板和试样上表面之间间隔 60 mm 进行试验时, 试样仍然膨胀或变形, 以致在点火前接触火花塞, 或试样上表面达到加热锥底板的水平, 试样不适用于本文件规定的试验。

接下页...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Anji Branch Fire Technology Service
Anji Branch Fire Technology Service

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

检测报告

报告号: AJFS2104003183FF-01_CN 日期: 2021 年 4 月 28 日 第 7 页 共 11 页

曲线图:

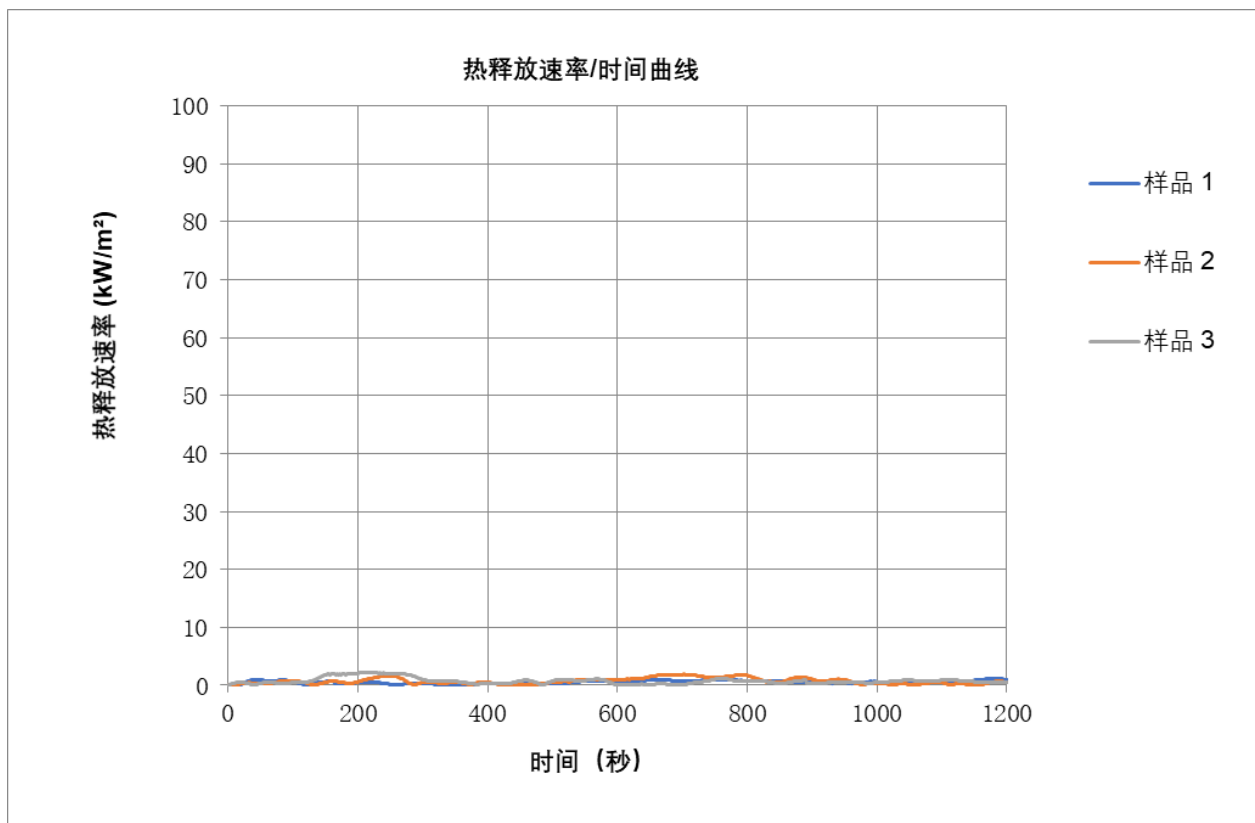


图 1--- 热释放速率/时间曲线

接下页...

检测报告

报告号: AJFS2104003183FF-01_CN 日期: 2021 年 4 月 28 日 第 8 页 共 11 页

附录 3: T10.01&T10.02 EN ISO 5659-2:2017 塑料—烟生成—第 2 部分:单室法测定烟密度试验方法, 辐射照度 50kW/m² 无焰模式, 测试时间 10min.

1. 预处理

T: 23±2℃, R.H: 50±5%条件下, 样品处理至重量恒定状态。

2. 测试结果

参数	1	2	3	平均值
重量 (g)	35.6	36.8	39.0	37.1
D _s (1.5)	0.7	0.4	0.1	0.4
D _s (4)	1.2	0.6	0.2	0.7
D _s (10)	1.6	1.5	1.6	1.6
VOF ₄ min	2.9	1.7	0.6	1.7
D _s max	1.6	1.5	1.6	1.6
T (D _s max) s	600	597	595	/

注释:

D_s (n) —试验进行第n分钟时的比光密度;

VOF₄ —试验前4分钟的比光密度累加值;

D_s max—试验期间最大比光密度。

接下页...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Anji Branch Fire Technology Service
Anji Branch Fire Technology Service

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

检测报告

报告号: AJFS2104003183FF-01_CN 日期: 2021 年 4 月 28 日 第 9 页 共 11 页

附录 4: T11.01 EN 45545-2:2013+A1:2015 附录 C 采用 FTIR 技术, 进行 EN ISO 5659-2 烟箱法气体分析

辐射照度 50kW/m² 无焰模式, 测试时间 10min.

1. 预处理

T: 23±2°C, R.H: 50±5 %条件下, 样品处理至重量恒定状态。

2. 测试结果

1) 测试开始4分钟

气体	1	2	3	均值
二氧化碳 (CO ₂)	46.0	57.8	59.2	54.3
一氧化碳 (CO)	4.7	4.6	2.1	3.8
氟化氢 (HF)	ND	ND	ND	---
氯化氢 (HCl)	4.6	3.9	3.5	4.0
溴化氢 (HBr)	ND	ND	ND	---
氰化氢 (HCN)	1.2	1.1	1.1	1.1
氮氧化物 (NO _x)	2.4	4.1	2.6	3.0
二氧化硫 (SO ₂)	ND	ND	ND	---

2) 测试开始8分钟

气体	1	2	3	均值
二氧化碳 (CO ₂)	467.1	371.5	373.6	404.1
一氧化碳 (CO)	143.1	35.6	28.5	69.1
氟化氢 (HF)	1.3	0.8	0.8	1.0
氯化氢 (HCl)	7.6	5.9	2.9	5.5
溴化氢 (HBr)	ND	ND	ND	---
氰化氢 (HCN)	1.5	1.1	1.1	1.2
氮氧化物 (NO _x)	2.6	3.9	3.7	3.4
二氧化硫 (SO ₂)	ND	ND	ND	---

注: ND---未发现

所有数值单位为mg/m³。

接下页...

检测报告

报告号: AJFS2104003183FF-01_CN 日期: 2021 年 4 月 28 日 第 10 页 共 11 页

3) 计算 CIT_G

气体成分	参考浓度 mg/m^3
二氧化碳 (CO_2)	72 000
一氧化碳 (CO)	1 380
氟化氢 (HF)	25
氯化氢 (HCl)	75
溴化氢 (HBr)	99
氰化氢 (HCN)	55
氮氧化物 (NO_x)	38
二氧化硫 (SO_2)	262

$$CIT_G = 0.0805 \cdot \sum_{i=1}^{i=8} \frac{C_i}{C_i}$$

其中

CIT_G — 传统毒性指数;

C_i — 第 i 类气体浓度;

C_i — 第 i 类气体参考浓度。


参数	1	2	3	均值
CIT_G (4 min)	0.012	0.015	0.011	0.013
CIT_G (8 min)	0.029	0.021	0.017	0.022

接下页...

检测报告

报告号: AJFS2104003183FF-01_CN 日期: 2021 年 4 月 28 日 第 11 页 共 11 页

附录照片:

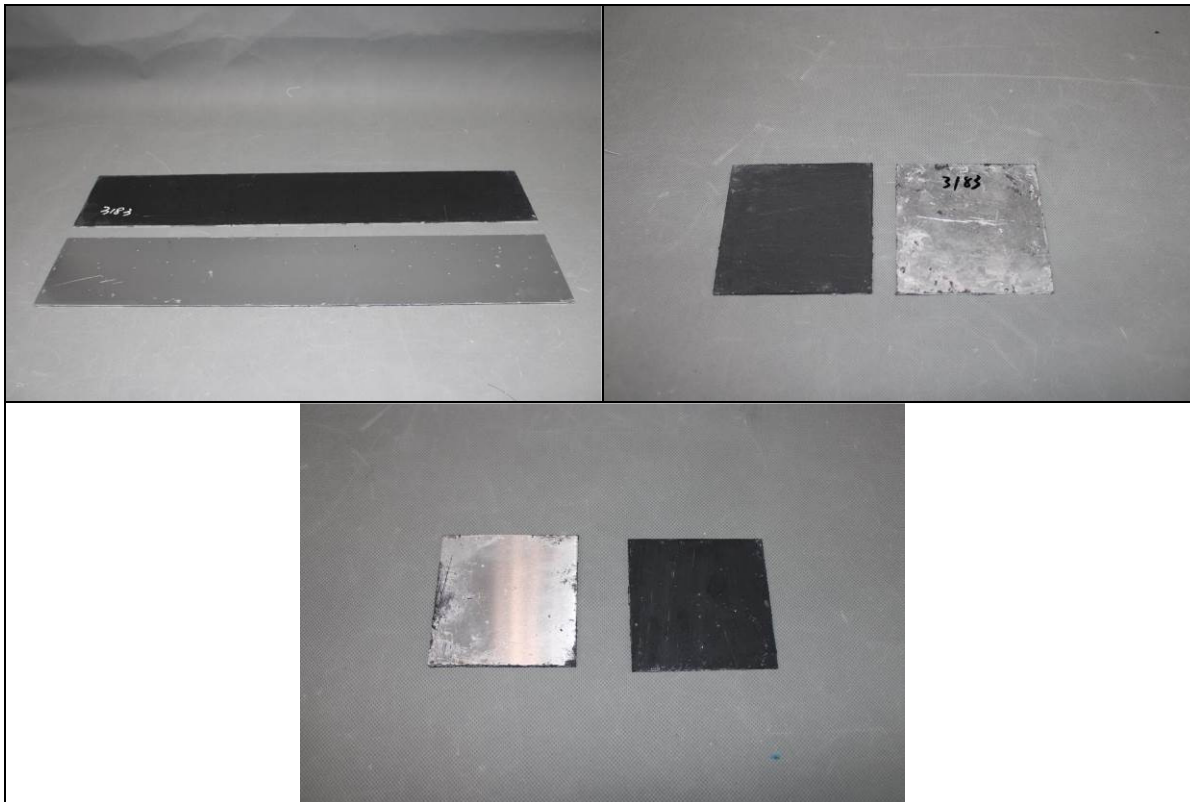

此照片仅限于随 SGS 正本报告使用

报告结束