

OVERVIEW

Series HSS is a bidirectional high pressure slurry valve, designed for demanding high pressure and abrasive slurry applications. The rigid one-piece body with full port, replaceable wear rings, and hard-faced gate make this ideal for the most challenging services.

SPECIFICATIONS

Size Range	2~36inch. Large Size Consult Factory
Temperature Range	-23°F to 392°F -31°C to 200°C
Maximum Working Pressure	Class 150, 300, 600
Body Style	Uni-Body

APPLICATIONS

Mining, Mineral sands, Coal, Power utilities,
Pulp and paper, General industrial, Soda ash,
Cement, General chemical, Oil Sands and Mineral Sands.

FEATURES

- 1 BODY:** Uni-Body design to eliminate the possibility of leakage between two bolted together body halves at extreme high-pressure.
- 2 PACKING:** Six rows multi-layer packing provide exceptional gland sealing. Copper Wire scrapers and tungsten carbide weld overlayed wear rings provide the highest durability and operating temperature performance desired.
- 3 SEAT:** Aflas, zero-leakage seat for Bi-Directional Isolation
- 4 GATE:** 17-4PH – H900 Gate with Tungsten Carbide weld overlay on leading wear edges and gate tip
- 5 STEM & CLEVIS:** Clevis design and horizontal bolting stabilizes gate ensuring proper alignment



Valve Description:


HSS 150, 300, 600 is an ANSI Class 150, 300, 600 valve. The Valve is a Unibody design and comprises of a Sharp Dovetailed Edge Gate, a Packing Follower and replaceable seats and rings and or without a Hydraulic/ Pneumatic or Electric Actuator. Smaller sizes of these valves could have a Gear Operator or Hand-Wheel.

DESIGN STANDARDS

Valve Design	MSS-SP-135
Seat Tightness	Zero Leakage
End Connections	Flanged
Face-to-Face	MSS-SP-135
Flange Drilling	ASME B16.5 CL150 / Other flange options available


PARTS IDENTIFICATION & MATERIAL OPTIONS

ITEM	DESCRIPTION	MATERIAL
1	Body	WCB /CF8/CF8M/Ni-Resist/Hastelloy
2	Knife Gate	SS316 / SS304 / 17-4PH
3	Packing follower	WCB /CF8/CF8M/Ni-Resist/Hastelloy
4	Seat Ring	WCB /CF8/CF8M/Ni-Resist/Hastelloy
5	Yoke	Carbon Steel
6	Hydraulic Cylinder	-
7	Packing Chamber	WCB /CF8/CF8M/Ni-Resist/Hastelloy
8	Clevis	CF8
9	O-Ring	VITON
10	Seat	EPDM/NBR/NR/VITON/AFLAS -
11	Gland Packing	Expended PTFE
12	Lock Pin	17-4 PH
13	Scraper	Copper Wipers
14	Deflector Cone	Ni Hard(ASTM A532)

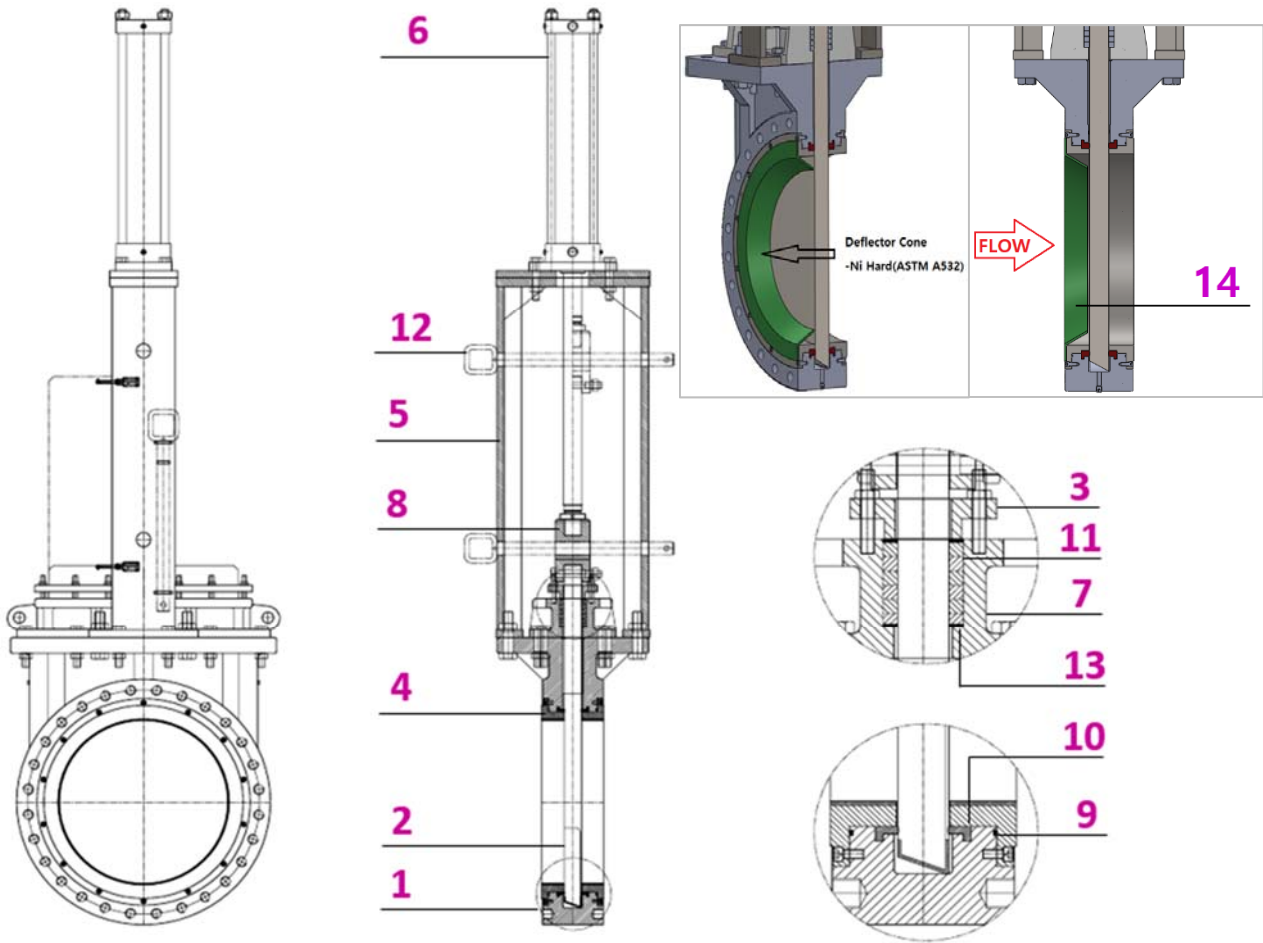


HSS 300CL DIMENSION


3) 12~60" Hydraulic Cylinder

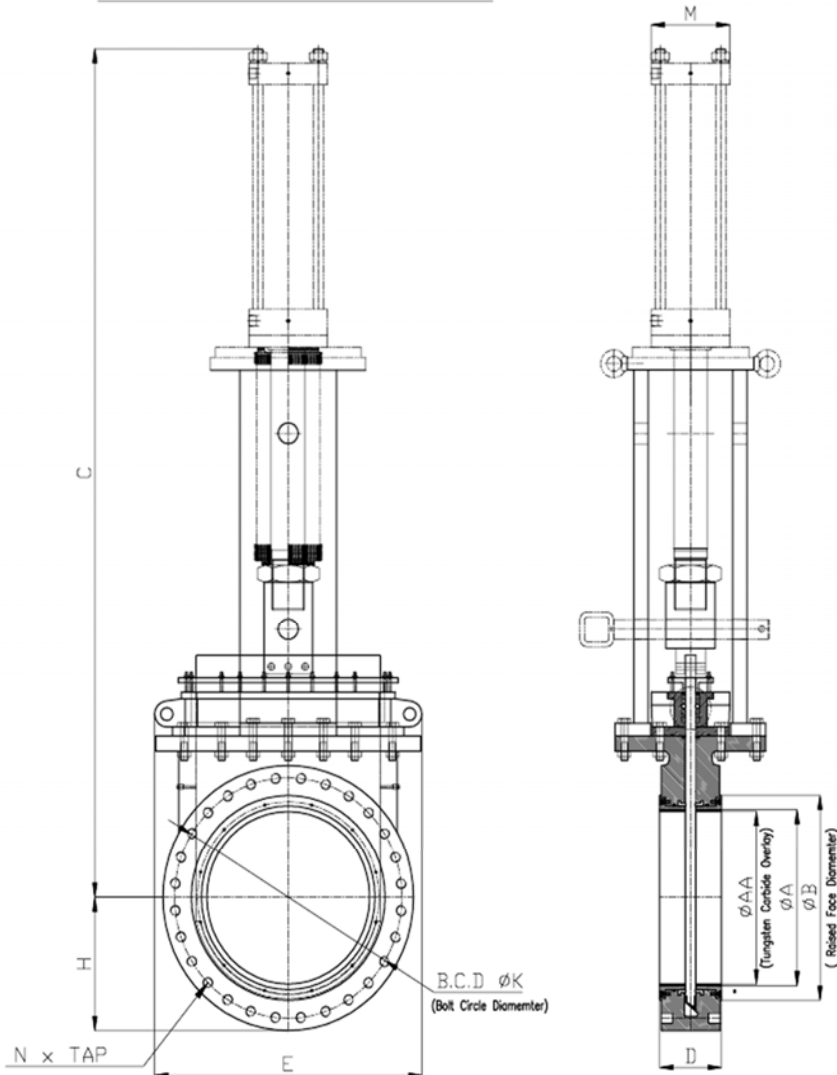

1) 2~4" Hand Wheel

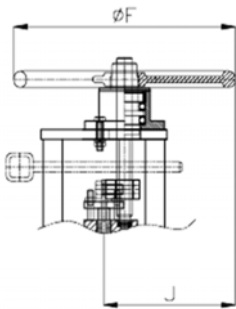

2) 6~10" Bevel Gear

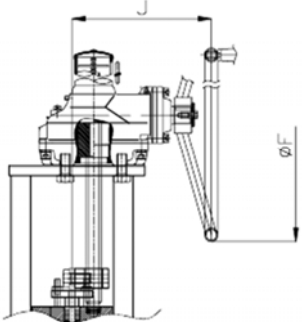

UNIT : Inch

SIZE(Inch)	A	AA	B	C	D	D—optional	E	F	H	J	K	M	N x Top
2	2	1.5	3.62	24.3	2.75	—	11.3	18	3.2	1.68	5.0	2.5	8 x 5/8-11
4	4	3.5	6.19	28	4.12	—	13.9	18	5.0	1.68	7.88	2.5	8 x 3/4-10
6	6	5.5	8.50	39.2	4.12	—	15.9	21	6.2	1.74	10.63	3.5	12 x 3/4-10
8	8	7.5	10.62	41.5	4.63	7.52	21.2	21	7.5	1.74	13.0	3.5	12 x 7/8-9
10	10	9.5	12.75	54.1	5.38	—	22.4	21	8.7	1.92	15.25	5.0	16 x 1-8
12	12	11.5	15.00	63.2	5.63	—	27.5	—	10.2	—	17.75	5.0	16 x 1 1/8-8
14	13.25	12.75	16.25	70.9	6.25	—	27.9	—	11.5	—	20.25	6.5	20 x 1 1/8-8
16	15.25	14.75	18.50	72.3	6.63	—	30.6	—	12.7	—	22.5	6.5	20 x 1 1/4-8
18	17	16.5	21.00	79.2	7.0	12.99	32.9	—	14.0	—	24.75	6.5	24 x 1 1/4-8
20	19	18.5	23.00	89.1	7.44	14.72	34.8	—	15.2	—	27.0	7.5	24 x 1 1/4-8
24	23	22.5	27.25	105.4	8.5	14.84	39.3	—	18.0	—	32.0	8.5	24 x 1 1/2-8
26	25	24.5	29.50	114.8	8.5	—	42.0	—	19.1	—	34.5	9.5	28 x 1 5/8-8
28	27	26.5	31.50	121.7	10.0	16.00	43.5	—	20.4	—	37.0	9.5	28 x 1 5/8-8
30	29	28.5	33.75	131.4	10.5	—	46.0	—	21.5	—	39.25	12.63	28 x 1 3/4-8
32	31	30.5	36.00	139.7	11.5	—	52.0	—	22.6	—	41.5	12.63	28 x 1 7/8-8
34	33	32.5	38.00	147.0	11.75	—	55.0	—	23.8	—	43.5	14.88	28 x 1 7/8-8
36	35	34.5	40.25	154.3	12.0	—	58.0	—	25.0	—	46.0	14.88	32 x 2-8
40	39	38.5	42.75	164.2	14.2	—	60.9	—	25.2	—	46.8	17.13	32 x 1 5/8-8
42	41	40.5	44.75	178.3	14.75	—	62.8	—	25.6	—	47.5	17.13	32 x 1 5/8-8
48	46.5	46	51.25	199.5	16.75	—	68.8	—	28.8	—	54.0	19.0	32 x 1 7/8-8
54	52.5	52	57.75	210.5	18.8	—	77.4	—	32.4	—	60.7	19.0	36 x 1 7/8-8
60	58	57.5	64.00	232.4	20.8	—	86.0	—	36.0	—	67.5	19.0	36 x 1 7/8-8

** All options including actuators can be changed to suit customer specifications. **