


VLAN Project

This project demonstrates 2 switch each on own VLAN communicating through the router to one another

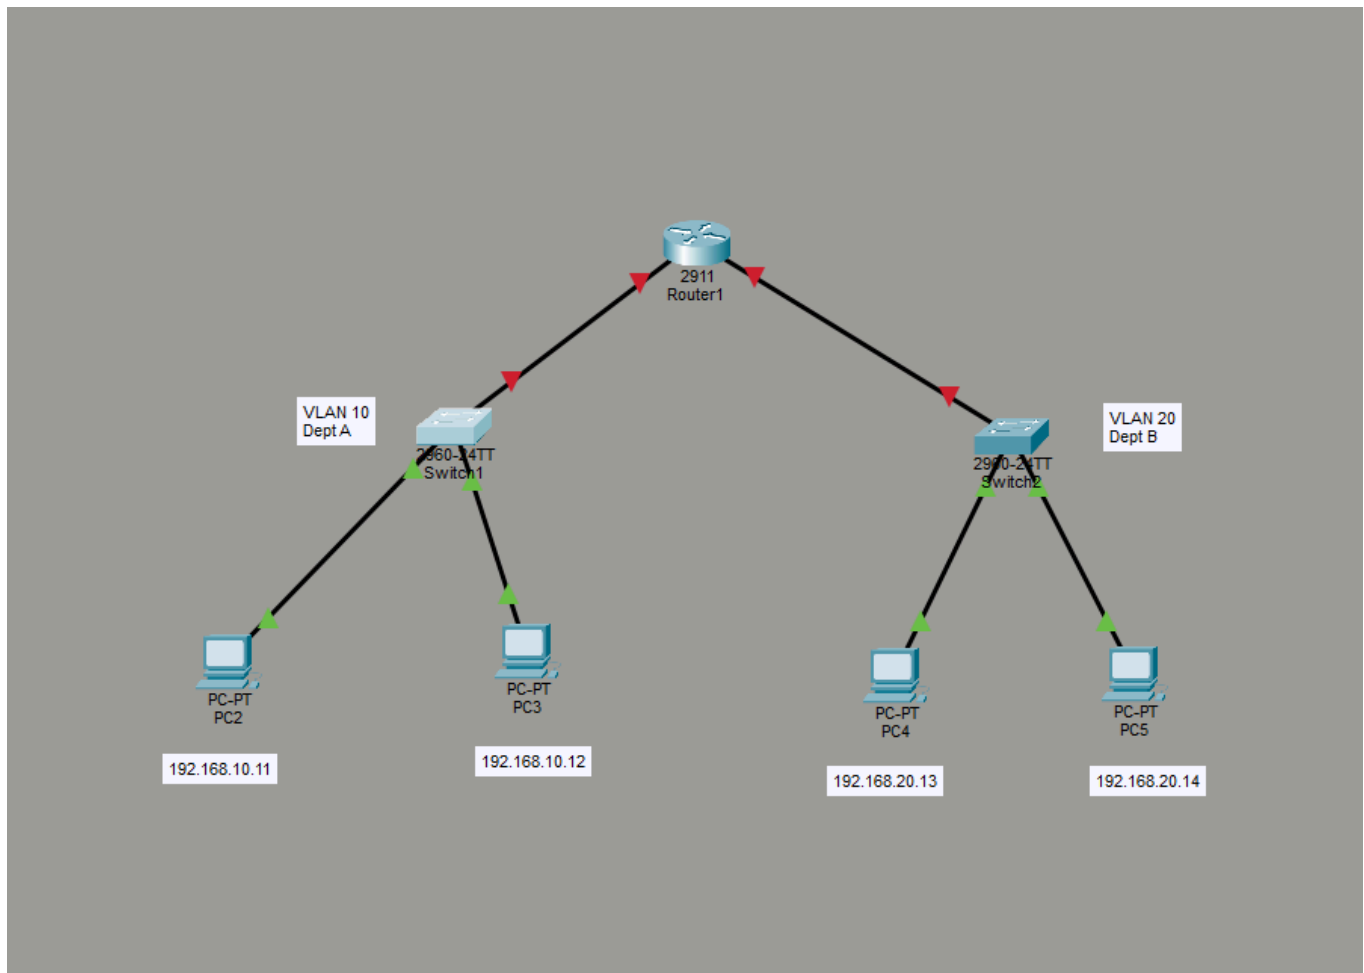

Router VLAN 10

```
en
conf t
```

Only need to do once

```
hostname {Name}- set the hostname of router to name.
enable secret {password}- sets router password
```

```
interface gi0/0
ip address 192.168.10.1 255.255.255.0
description Dept_A
no shutdown
exit (Takes back to config)
exit (Exits config mode)
```

```
write memory
```

Only need to do once

```
copy run start- saves run config to start config
```

```
show run - shows run config
```

```
show startup-configuration- shows startup config
```

Router VLAN 20

```
en
```

```
conf t
```

Only need to do once

```
hostname {Name}- set the hostname of router to name.
```

```
enable secret {password}- sets router password
```

```
interface gi0/1
```

```
ip address 192.168.20.1 255.255.255.0
```

```
description Dept_B
```

```
no shutdown
```

```
exit (Takes back to config)
```

```
exit (Exits config mode)
```

```
write memory
```

Only need to do once

```
copy run start- saves run config to start config
```

```
show run - shows run config
```

```
show startup-configuration- shows startup config
```

Switch 1 Setup

```
en
```

```
conf t
```

```
vlan 10
```

```
name Dept_A
```

```
exit
```

```
interface range fa0/1 - 24
```

```
switchport mode access
```

```
switchport access vlan 10
```

```
exit
```


```
exit
```

```
write memory
show vlan brief
```

Switch 2 Setup

```
en
conf t
vlan 20
name Dept_B
exit
interface range fa0/1 - 24
switchport mode access
switchport access vlan 20
exit
exit
write memory
show vlan brief
```

PC Setup (Example pic each one setup own IP address from diagram above)

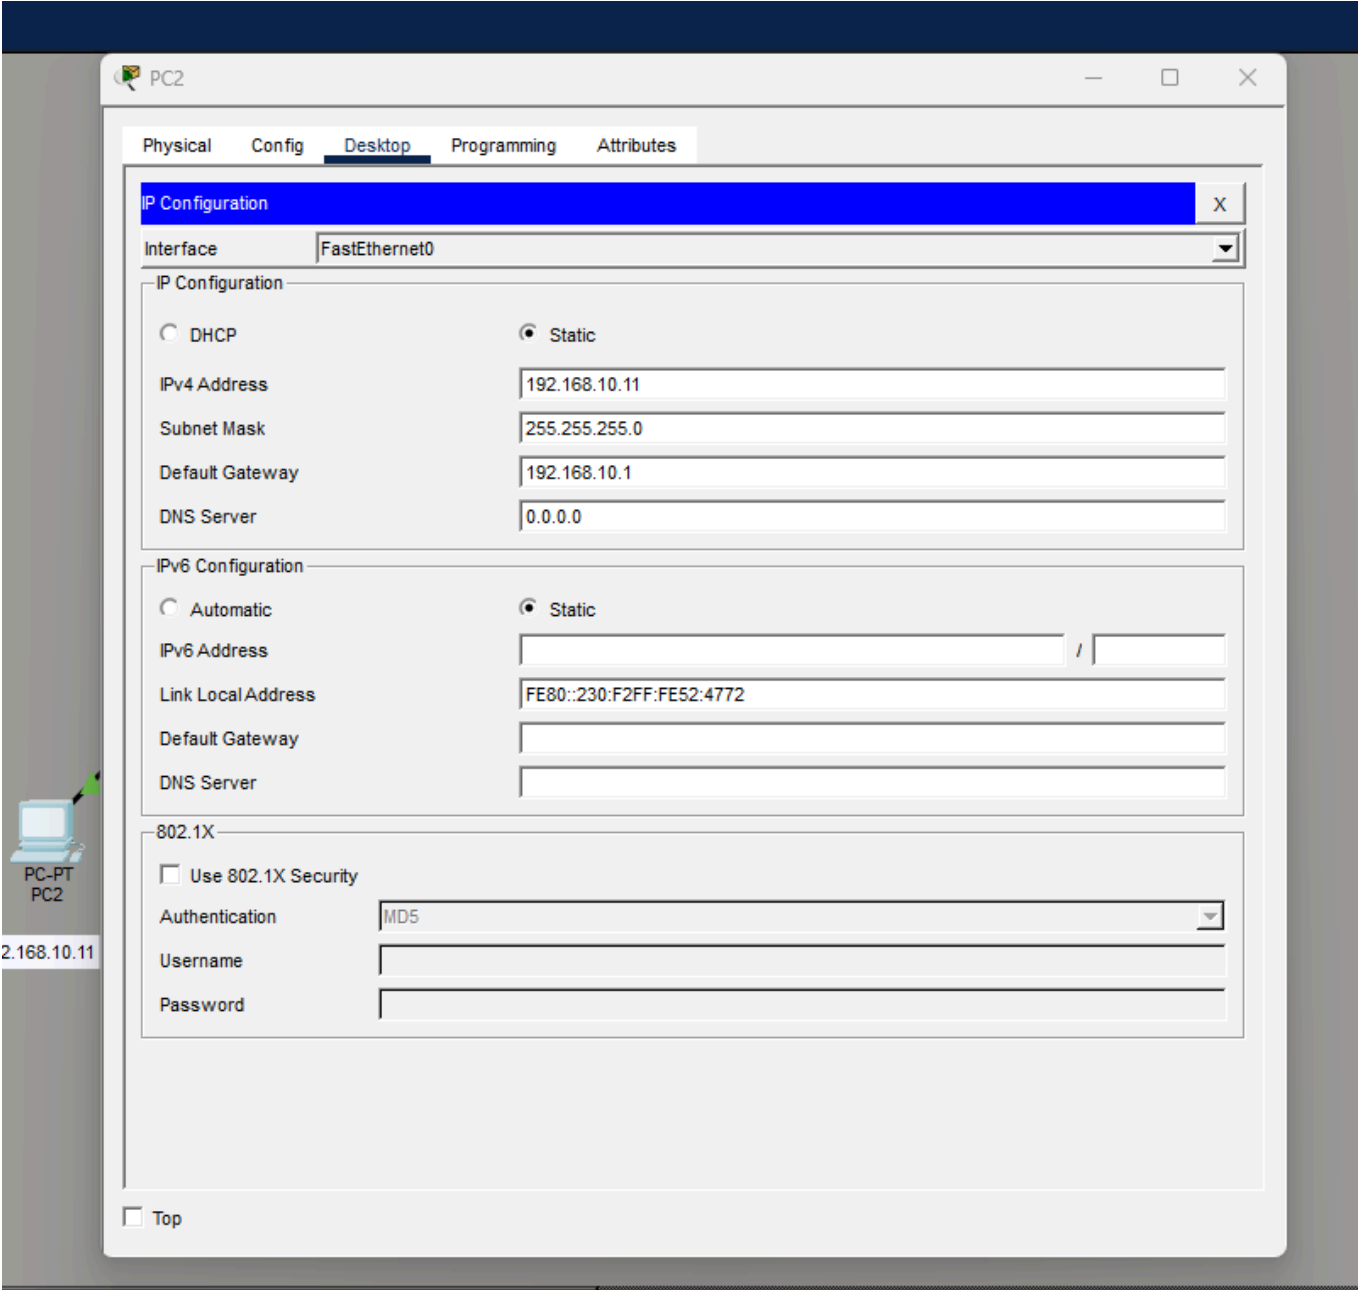

Test Example (should be able to ping each computer to other computer)

PC2

Physical Config Desktop Programming Attributes

Command Prompt

X

Cisco Packet Tracer PC Command Line 1.0

C:\>ping 192.168.10.12

Pinging 192.168.10.12 with 32 bytes of data:

Reply from 192.168.10.12: bytes=32 time<1ms TTL=128

Reply from 192.168.10.12: bytes=32 time<1ms TTL=128

Reply from 192.168.10.12: bytes=32 time<1ms TTL=128

Reply from 192.168.10.12: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.12:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.20.13

Pinging 192.168.20.13 with 32 bytes of data:

Request timed out.

Reply from 192.168.20.13: bytes=32 time<1ms TTL=127

Reply from 192.168.20.13: bytes=32 time<1ms TTL=127

Reply from 192.168.20.13: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.20.13:

Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>arp -a

Internet Address	Physical Address	Type
192.168.10.1	0007.ec69.be01	dynamic
192.168.10.12	0001.43a3.5748	dynamic

C:\>

☐ Top