


Skill - 1


Install Wireshark

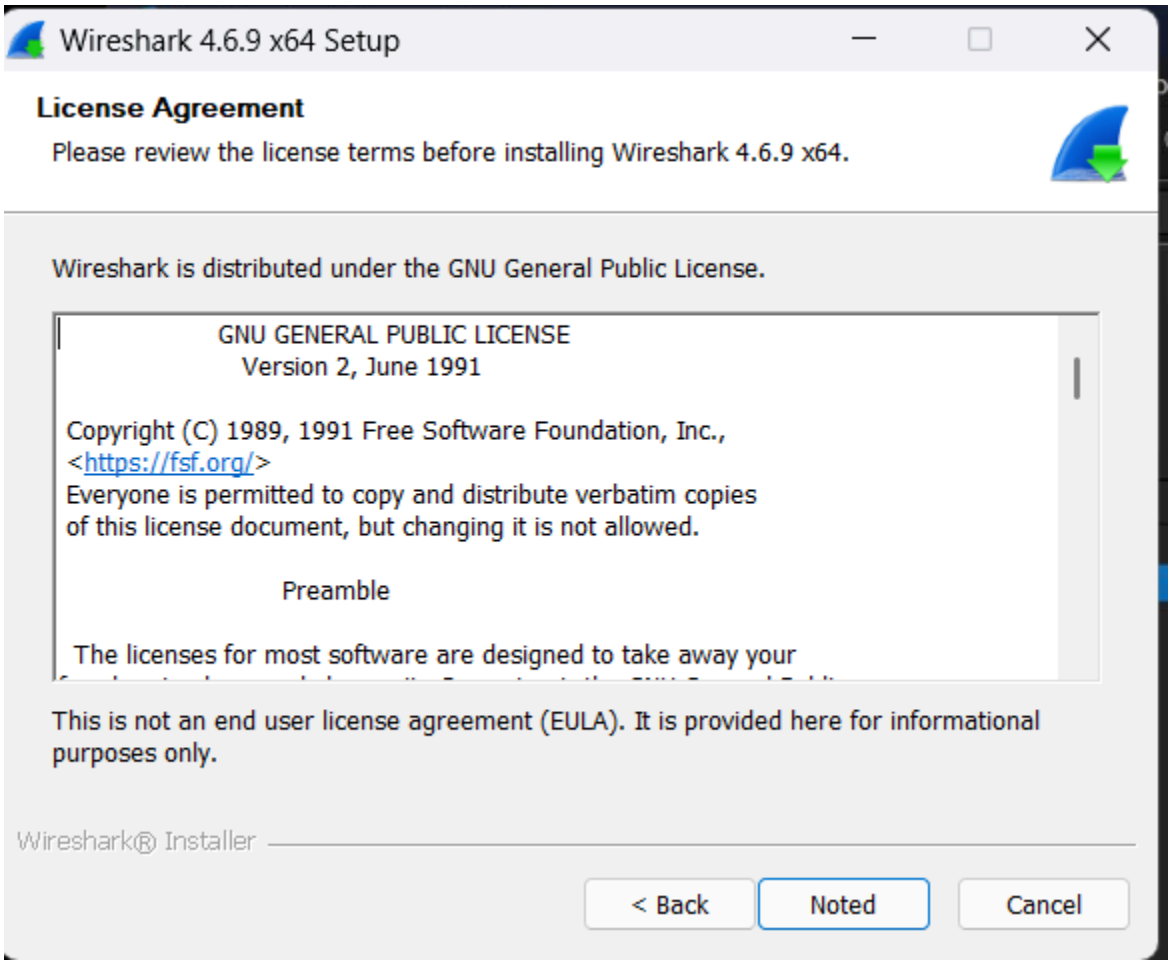

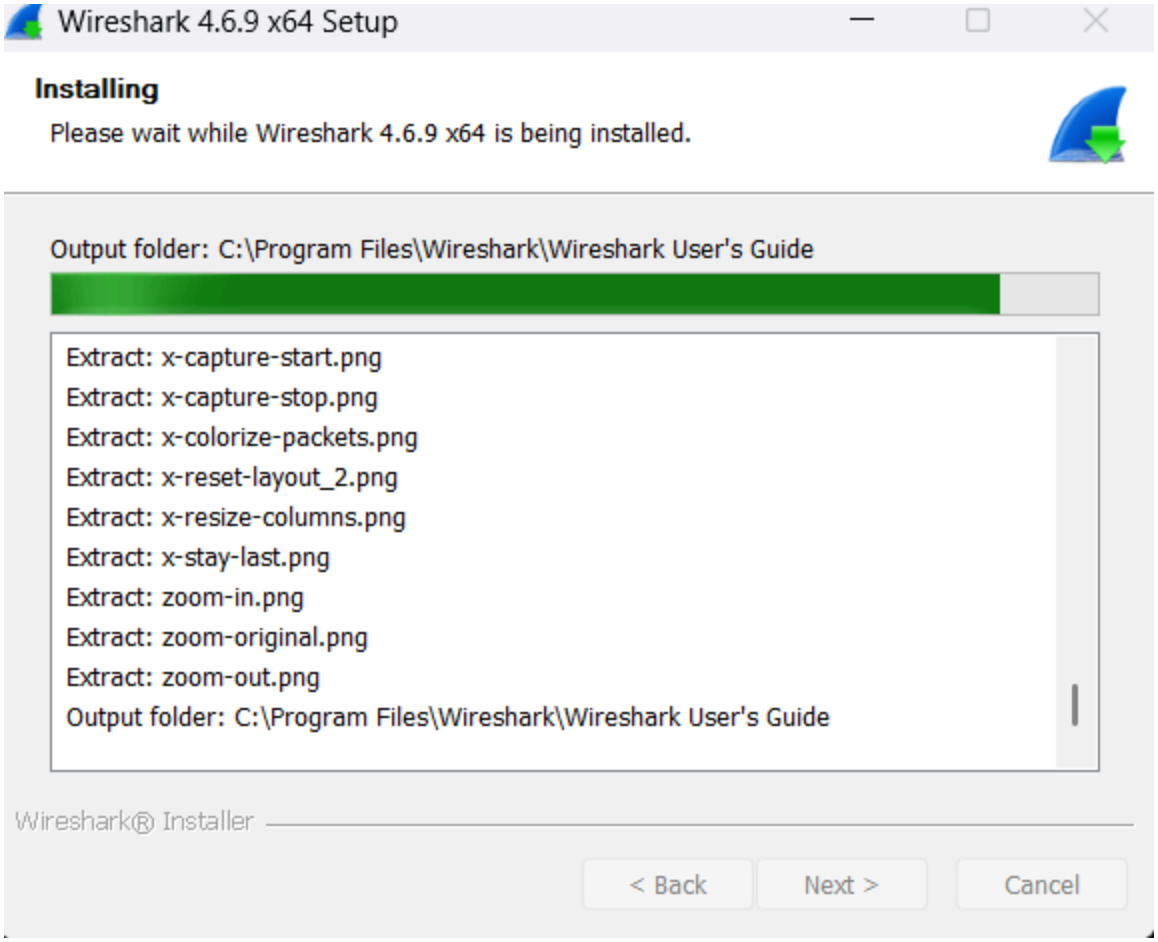


Generate network traffic

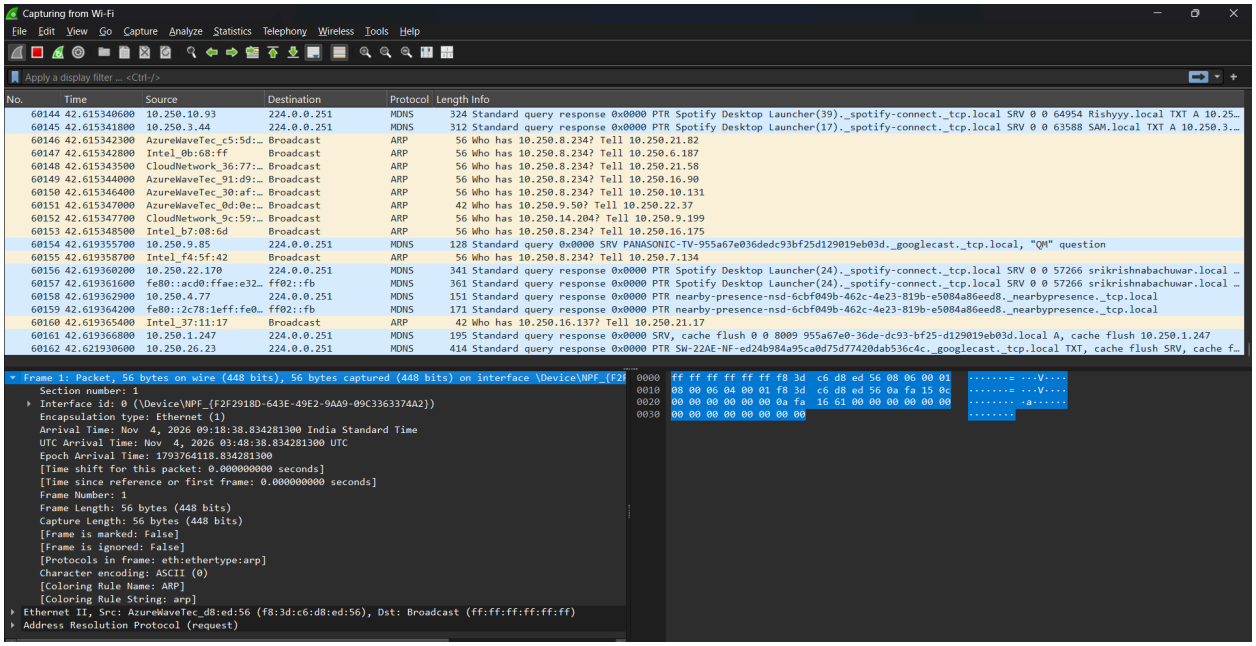

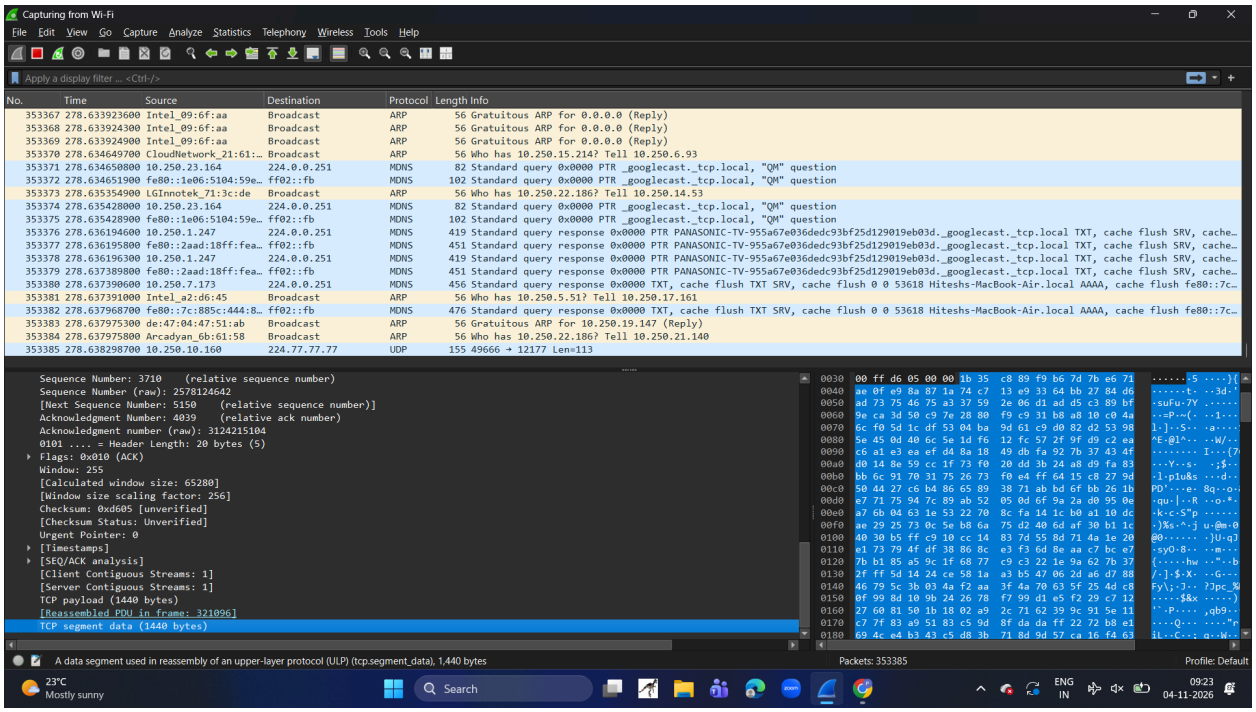


Apply Display Filter


1.tcp

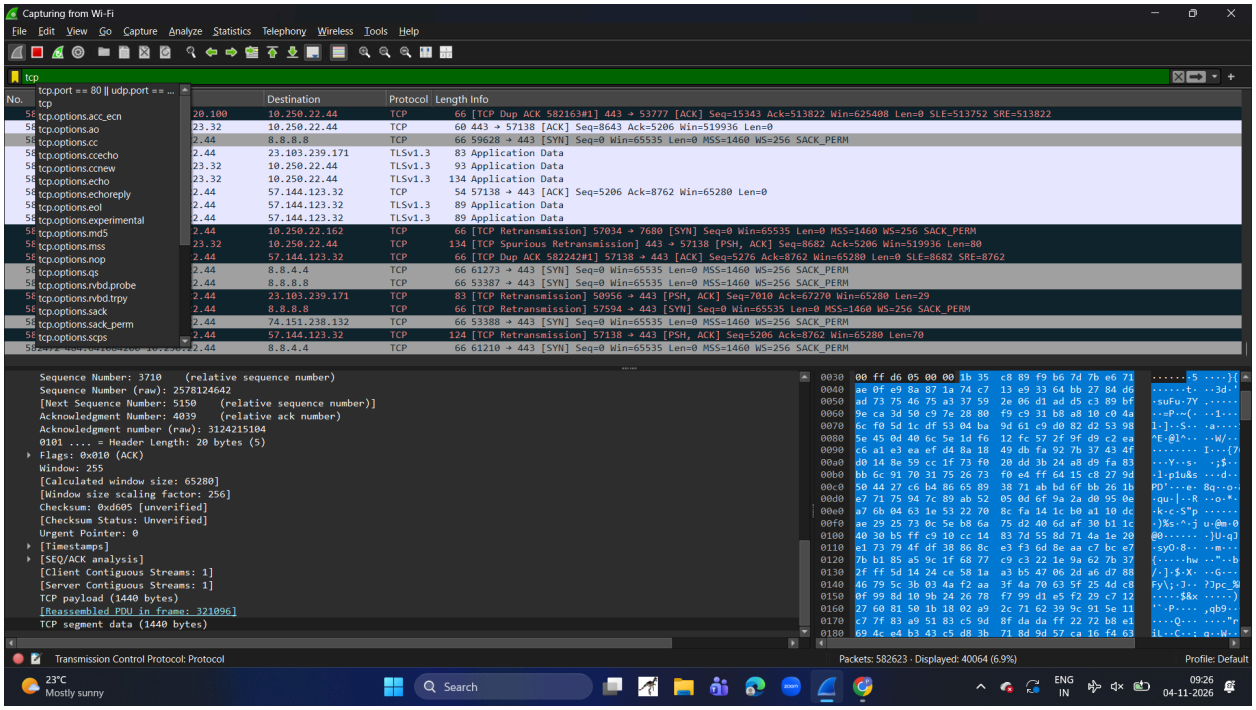


2.udp

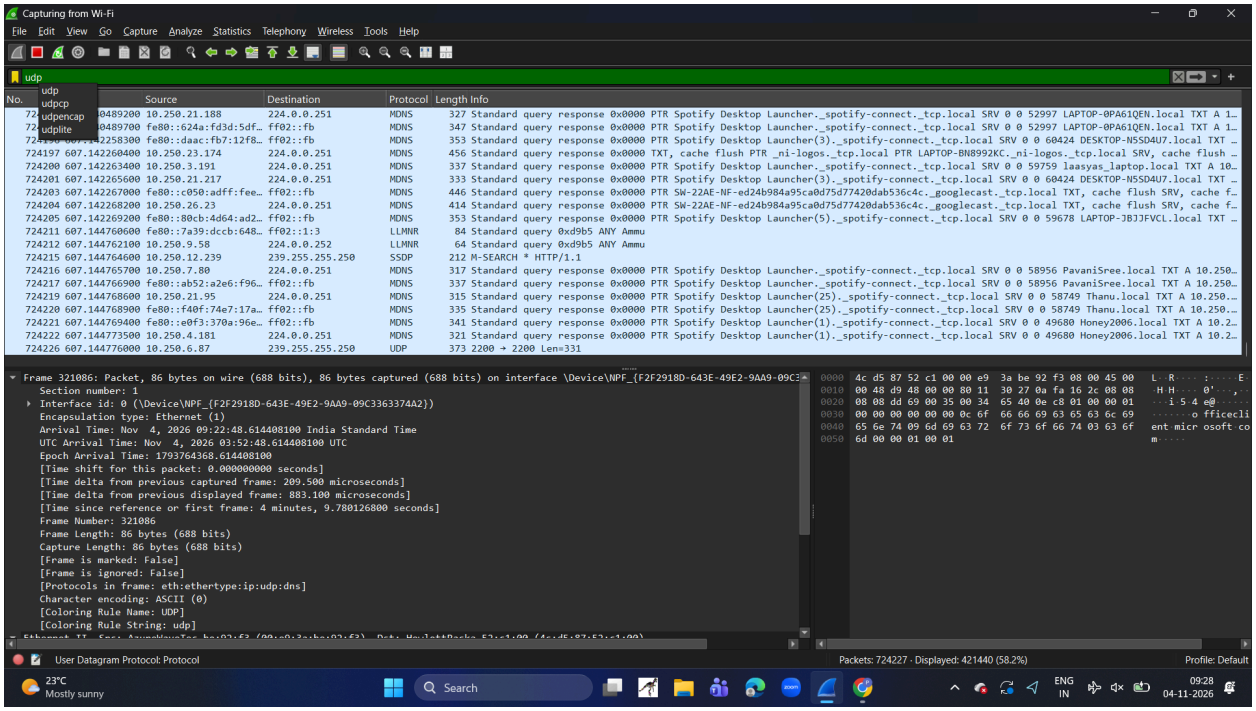

3.icmpv6

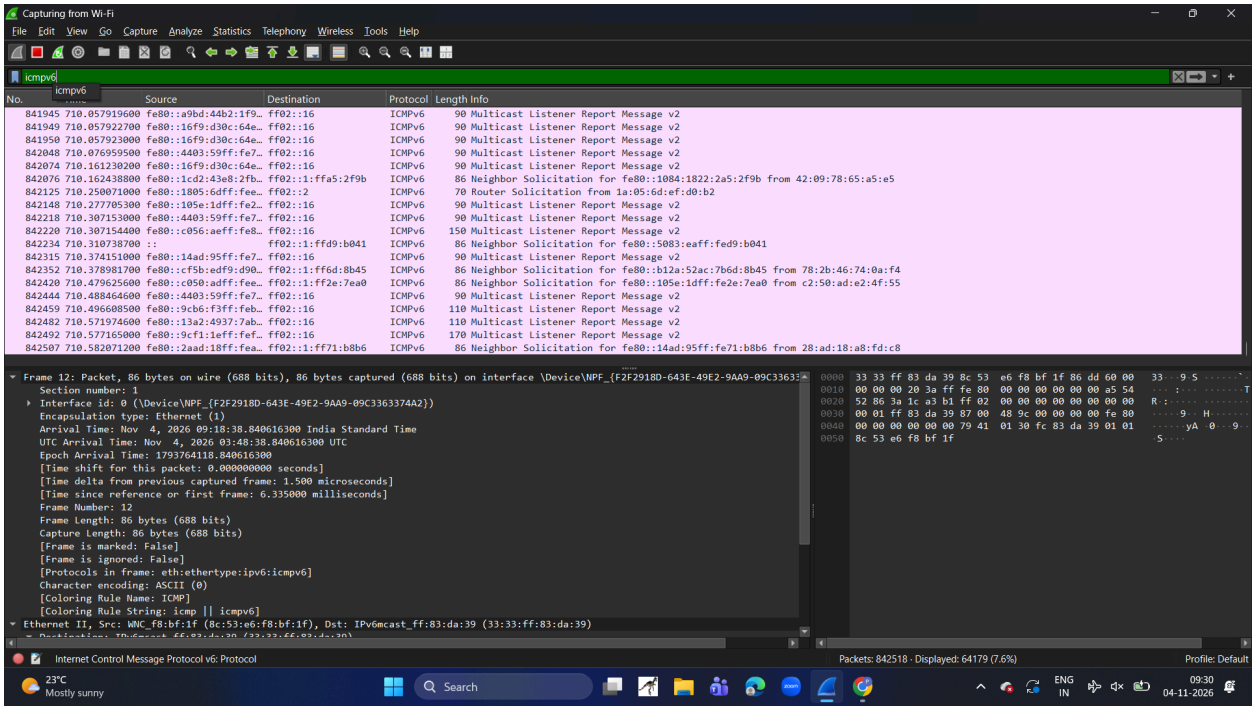

4.tcp.len > 0

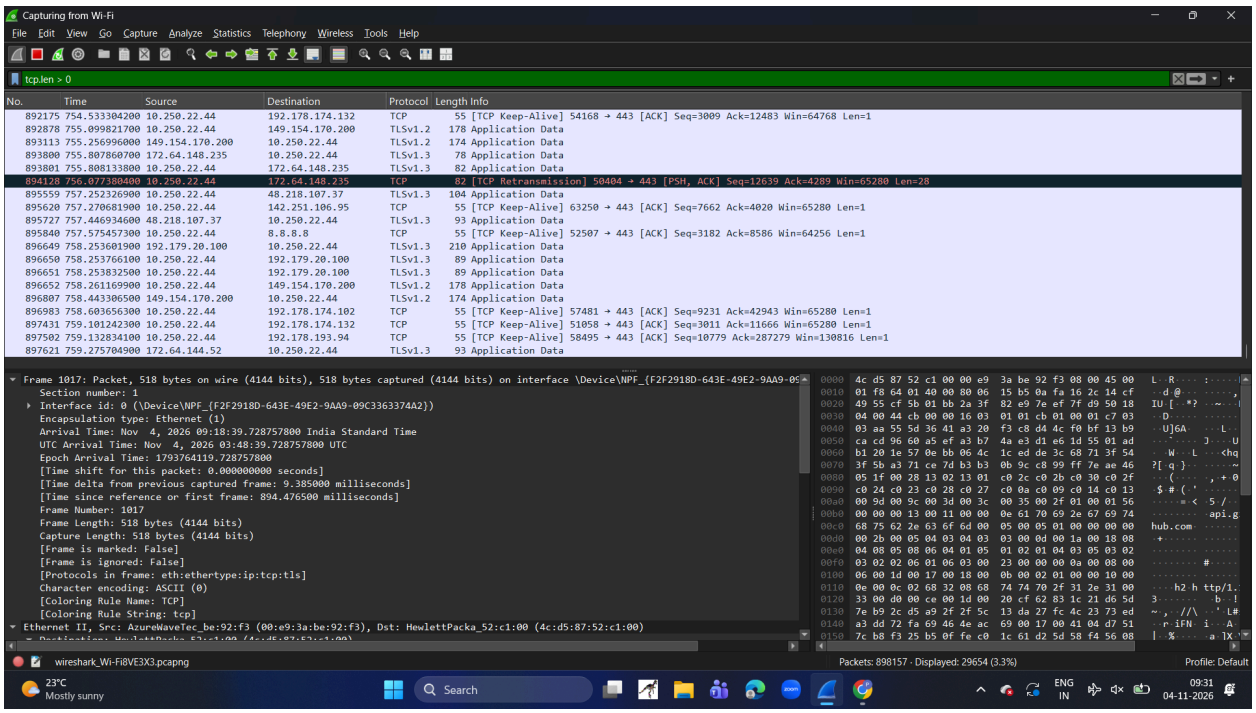

Inspect packet headers

```
▾ Frame 1017: Packet, 518 bytes on wire (4144 bits), 518 bytes captured (4144 bits) on interface \Device\NPF_{F2F2918D-643E-49E2-9AA9-0
    Section number: 1
  ▸ Interface id: 0 (\Device\NPF_{F2F2918D-643E-49E2-9AA9-09C3363374A2})
    Encapsulation type: Ethernet (1)
    Arrival Time: Nov  4, 2026 09:18:39.728757800 India Standard Time
    UTC Arrival Time: Nov  4, 2026 03:48:39.728757800 UTC
    Epoch Arrival Time: 1793764119.728757800
    [Time shift for this packet: 0.000000000 seconds]
    [Time delta from previous captured frame: 9.385000 milliseconds]
    [Time delta from previous displayed frame: 9.385000 milliseconds]
    [Time since reference or first frame: 894.476500 milliseconds]
    Frame Number: 1017
    Frame Length: 518 bytes (4144 bits)
    Capture Length: 518 bytes (4144 bits)
    [Frame is marked: False]
    [Frame is ignored: False]
    [Protocols in frame: eth:ethertype:ip:tcp:tls]
    Character encoding: ASCII (0)
    [Coloring Rule Name: TCP]
    [Coloring Rule String: tcp]
▾ Ethernet II, Src: AzureWaveTec_be:92:f3 (00:e9:3a:be:92:f3), Dst: HewlettPacka_52:c1:00 (4c:d5:87:52:c1:00)
  ▾ Destination: HewlettPacka_52:c1:00 (4c:d5:87:52:c1:00)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
  ▾ Source: AzureWaveTec_be:92:f3 (00:e9:3a:be:92:f3)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Type: IPv4 (0x0800)
    [Stream index: 502]
▸ Internet Protocol Version 4, Src: 10.250.22.44, Dst: 20.207.73.85
▾ Transmission Control Protocol, Src Port: 53083, Dst Port: 443, Seq: 1, Ack: 1, Len: 464
    Source Port: 53083
    Destination Port: 443
    [Stream index: 0]
    [Stream Packet Number: 4]
```