SUNPOWER

E20/435 SOLAR PANEL

20% EFFICIENCY

SunPower E20 panels are the highestefficiency panels on the market today, providing more power in the same amount of space

MAXIMUM SYSTEM OUTPUT


Comprehensive inverter compatibility ensures that customers can pair the highestefficiency panels with the highest-efficiency inverters, maximizing system output

REDUCED INSTALLATION COST

More power per panel means fewer panels per install. This saves both time and money.

RELIABLE AND ROBUST DESIGN

SunPower's unique Maxeon[™] cell technology and advanced module design ensure industry-leading reliability



MAXEON™ CELL TECHNOLOGY

Patented all-back-contact solar cell, providing the industry's highest efficiency and reliability






THE WORLD'S STANDARD FOR SOLAR™

SunPower[™] E20 Solar Panels provide today's highest efficiency and performance. Powered by SunPower Maxeon[™] cell technology, the E20 series provides panel conversion efficiencies of up to 20.1%. The E20's low voltage temperature coefficient, anti-reflective glass and exceptional low-light performance attributes provide outstanding energy delivery per peak power watt.

SUNPOWER'S HIGH EFFICIENCY ADVANTAGE

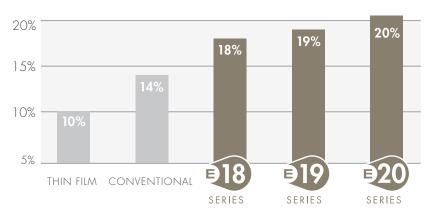


sunpowercorp.com



MODEL: SPR-435NE-WHT-D


electrical data		
Measured at Standard Test Conditions (STC): irradiance of 1000 W/m², AM 1.5, and cell temperature 25° C		
Peak Power (+/- 5%)	P _{max}	435 W
Cell Efficiency	η	22.5 %
Panel Efficiency	η	20.1 %
Rated Voltage	V_{mpp}	72.9 V
Rated Current	I _{mpp}	5.97 A
Open-Circuit Voltage	V _{oc}	85.6 V
Short-Circuit Current	I _{sc}	6.43 A
Maximum System Voltage	UL	600 V
Temperature Coefficients	Power (P)	- 0.38%/K
	Voltage (V _{oc})	- 235.5 mV/K
	Current (I _{sc})	3.5 mA/K
NOCT		45° C +/- 2° C
Series Fuse Rating		20 A
Grounding	Positive grounding not required	

	mechanical data
Solar Cells	128 SunPower Maxeon™ cells
Front Glass	High-transmission tempered glass with anti-reflective (AR) coating
Junction Box	IP-65 rated with 3 bypass diodes
	Dimensions: 32 x 155 x 128 mm
Output Cables	700 mm cables / Multi-Contact (MC4) connectors
Frame	Anodized aluminum alloy type 6063 (silver); stacking pins
Weight	56.0 lbs. (25.4 kg)

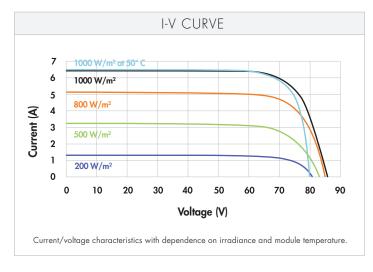

TESTED	tested operating conditions		
Temperature	– 40° F to +185° F (– 40° C to + 85° C)		
Max load 113 psf 550 kg/m² (5400 Pa), front (e.g. snow/specified mounting configurations			
	50 psf 245 kg/m 2 (2400 Pa) front and back (e.g. wind)		
Impact Resistance	Hail: (25 mm) at 51 mph (23 m/s)		

warranties and certifications		
Warranties	25-year limited power warranty	
	10-year limited product warranty	
Certifications	Tested to UL 1703. Class C Fire Rating	

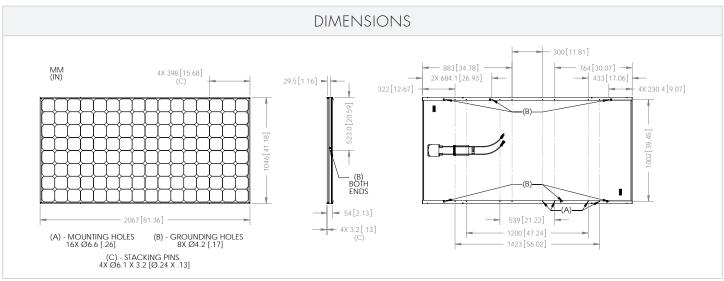

Please read safety and installation instructions before using this product, visit sunpowercorp.com for more details.