

Nama : Bintang Anugerah

NIM : 224308030

Kelas TKA 6-B

Kontrol PID

Program transfer fuction :

```
clear
clc
% Parameter Motor
R = 0.4;
L = 2.7;
J = 0.0004;
B = 0.0022;
Ke = 0.015;
Kt = 0.05;

% Numerator dan Denominator
num = Ke;
den = [L * J (L * B + R * J) (R * B + Ke * Kt)];

% Transfer Function (Open-loop)
Gs = tf(num, den);

% PID parameters
kp = 53.7208;
Ti = 0.73245;
Td = 0.17711;
ki = kp / Ti;
kd = kp * Td;

% Buat controller PID
PID = pid(kp, ki, kd);

% Closed-loop transfer function (Negative feedback, unity)
T = feedback(PID * Gs, 1);

% Step response
step(T)
title('Step Response with PID Controller')
grid on

% Hitung karakteristik step response
```

```
info = stepinfo(T)
```

```
% Tampilkan hasil karakteristik
```

```
fprintf('\nKarakteristik Step Response:\n');
```


```
fprintf('Rise Time    : %.4f s\n', info.RiseTime);
```

```
fprintf('Peak Time     : %.4f s\n', info.PeakTime);
```

```
fprintf('Overshoot     : %.2f %%\n', info.Overshoot);
```


```
fprintf('Settling Time  : %.4f s\n', info.SettlingTime);
```

Hasil Run :

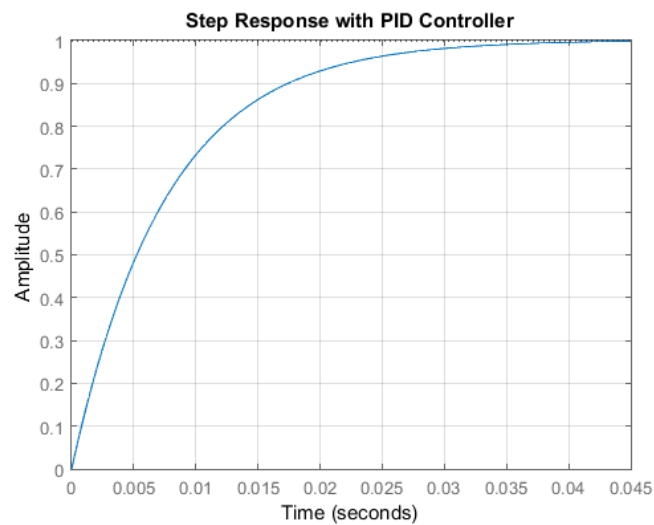


<pre>info = RiseTime: 0.0166 SettlingTime: 0.0294 SettlingMin: 0.9002 SettlingMax: 1.0010 Overshoot: 0.1002 Undershoot: 0 Peak: 1.0010 PeakTime: 0.0554</pre>	Karakteristik Step Response: <pre>Rise Time : 0.0166 s Peak Time : 0.0554 s Overshoot : 0.10 % Settling Time : 0.0294 s</pre>
---	---

Simulink :

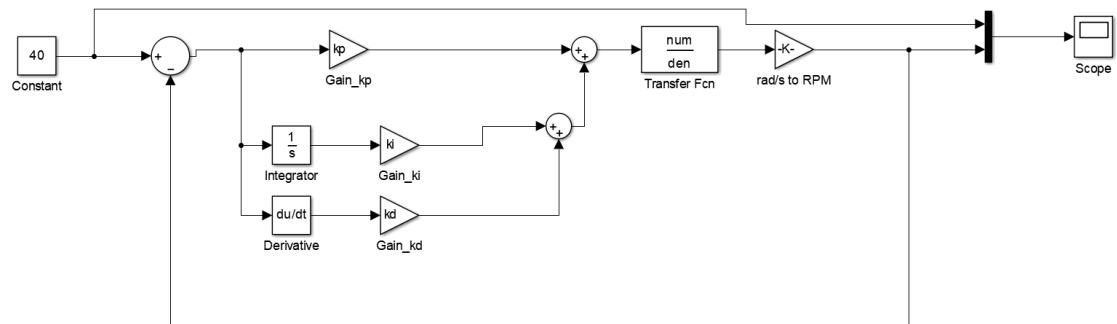

Hasil Simulink :

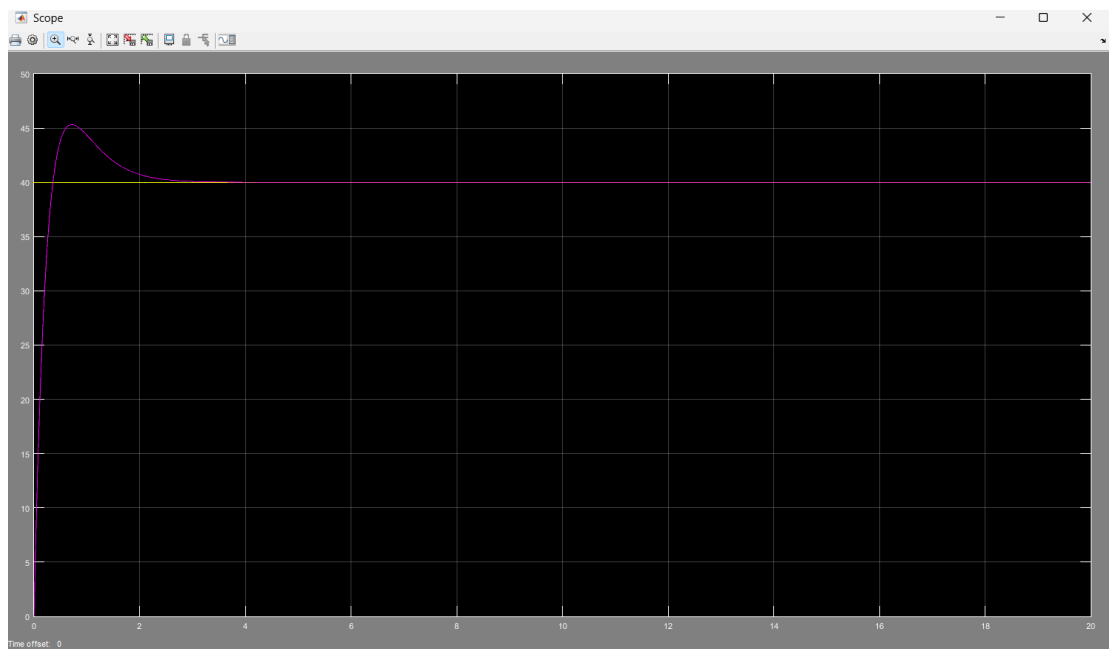

Program ARDUINO IDE :

```
#include <WiFi.h>
#include <PubSubClient.h>

// =====
// KONFIGURASI WIFI & MQTT
// =====

const char* ssid = "TKA 6Barokah";
const char* password = "65432100";
```

```

const char* mqtt_server = "broker.hivemq.com";
const int mqtt_port = 1883;
WiFiClient espClient;
PubSubClient client(espClient);

// =====
// PIN KONFIGURASI
// =====

const int pinMotorPWM = 5;
const int pinREn = 21;
const int pinLEn = 22;
const int encoderPinA = 34;
const int encoderPinB = 35;

// =====
// VARIABEL PID & MOTOR
// =====

kp = 53.7208;
Ti = 0.73245;
Td = 0.17711;
ki = kp / Ti;
kd = kp * Td;
float error = 0, lastError = 0, integral = 0;
float targetSpeedKmh = 0;
float actualSpeedKmh = 0;
int pidPWM = 0;
int throttleLevel = 0;
String motorDirection = "forward"; // Default arah

// =====
// ENCODER
// =====

volatile long encoderCount = 0;
unsigned long lastSpeedCheck = 0;
void IRAM_ATTR encoderISR() {
    encoderCount++;
}

// =====
// WIFI DAN MQTT SETUP
// =====

void setup_wifi() {
    Serial.print("Connecting to WiFi ");
    Serial.print(ssid);
    WiFi.mode(WIFI_STA);
    WiFi.begin(ssid, password);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.println();
    Serial.println("WiFi connected, IP: " + WiFi.localIP().toString());
}

```

```

void reconnect() {
  while (!client.connected()) {
    Serial.print("Connecting to MQTT...");
    String clientId = "ESP32Client-";
    clientId += String(random(0xffff), HEX);
    if (client.connect(clientId.c_str())) { // Connect tanpa user/password
      Serial.println("connected!");
      client.subscribe("motor/throttle");
      client.subscribe("motor/direction");
    } else {
      Serial.print("failed, rc=");
      Serial.print(client.state());
      Serial.println(" try again in 5 seconds");
      delay(5000);
    }
  }
}

// =====
// CALLBACK MQTT
// =====

void callback(char* topic, byte* payload, unsigned int length) {
  String msg;
  for (unsigned int i = 0; i < length; i++) {
    msg += (char)payload[i];
  }

  Serial.print("[MQTT] Topic: ");
  Serial.print(topic);
  Serial.print(" | Message: ");
  Serial.println(msg);

  if (String(topic) == "motor/throttle") {
    int throttle = msg.toInt();
    throttleLevel = constrain(throttle, 0, 3);
    switch (throttleLevel) {
      case 1: targetSpeedKmh = 5; break;
      case 2: targetSpeedKmh = 10; break;
      case 3: targetSpeedKmh = 15; break;
    }
    Serial.println("[MQTT] Throttle level set: " + String(throttleLevel));
  }

  if (String(topic) == "motor/direction") {
    msg.toLowerCase();
    if (msg == "forward" || msg == "reverse" || msg == "neutral") {
      motorDirection = msg;
      Serial.println("[MQTT] Direction set: " + motorDirection);
    }
  }
}

```

```

    }
}
}

// =====
// SETUP
// =====
void setup() {
    Serial.begin(115200);

    pinMode(pinREn, OUTPUT);
    pinMode(pinLEn, OUTPUT);

    ledcSetup(0, 5000, 8); // 5kHz, 8-bit PWM
    ledcAttachPin(pinMotorPWM, 0);

    pinMode(encoderPinA, INPUT_PULLUP);
    pinMode(encoderPinB, INPUT_PULLUP);
    attachInterrupt(digitalPinToInterrupt(encoderPinA), encoderISR, RISING);

    setup_wifi();
    client.setServer(mqtt_server, mqtt_port);
    client.setCallback(callback);
}

// =====
// MENGHITUNG KECEPATAN
// =====
void updateSpeed() {
    noInterrupts();
    long count = encoderCount;
    encoderCount = 0;
    interrupts();

    float rpm = (count / 20.0) * 60.0; // 20 pulses per rotation
    float wheelCircumference = 3.14 * 0.1; // Diameter roda 10 cm
    actualSpeedKmh = (rpm * wheelCircumference * 60.0) / 1000.0;

    Serial.println("[ESP32] Actual Speed: " + String(actualSpeedKmh, 2) + " km/h");
    client.publish("motor/actual_speed", String(actualSpeedKmh, 2).c_str());
}

// =====
// KONTROL ARAH
// =====
void controlDirection() {
    if (motorDirection == "forward") {
        digitalWrite(pinREn, HIGH);
        digitalWrite(pinLEn, LOW);
    }
}

```

```

    } else if (motorDirection == "reverse") {
        digitalWrite(pinREn, LOW);
        digitalWrite(pinLEn, HIGH);
    } else { // neutral
        digitalWrite(pinREn, LOW);
        digitalWrite(pinLEn, LOW);
    }
}

// =====
// PID CONTROL
// =====

void PIDControl() {
    if (motorDirection == "neutral" || targetSpeedKmh == 0) {
        ledcWrite(0, 0);
        pidPWM = 0;
        integral = 0;
        lastError = 0;
        return;
    }

    error = targetSpeedKmh - actualSpeedKmh;
    integral += error;
    float derivative = error - lastError;
    lastError = error;

    float output = Kp * error + Ki * integral + Kd * derivative;
    pidPWM = constrain((int)output, 0, 255);
    ledcWrite(0, pidPWM);

    Serial.println("[ESP32] PID PWM: " + String(pidPWM));
    client.publish("motor/pid_output", String(pidPWM).c_str());
}

// =====
// LOOP UTAMA
// =====

void loop() {
    if (!client.connected()) {
        reconnect();
    }
    client.loop();

    controlDirection();

    unsigned long now = millis();
    if (now - lastSpeedCheck >= 1000) {
        lastSpeedCheck = now;
        updateSpeed();
    }
}

```

```
PIDControl();  
}  
}
```