(54) Title: METHOD FOR CONTROLLING A SPRYTE RENDERING PROCESSOR

(57) Abstract

Linked lists of spryte control blocks are prepared in memory (108) and transversed by a spryte rendering engine. Each spryte control block (106) controls the rendering of a respective spryte into the display buffer, and contains such information as a pointer to source data for the corresponding spryte, positional an incrementing specifications for a destination quadrilateral, a control word for manipulations to be performed on the spryte image source data, and an indication of which of several available formats the spryte image source data is packed in. Once the linked list is prepared, the spryte rendering engine (106) can be called by writing certain values into specific memory-mapped hardware registers, and then writing dummy data to an address recognized by the hardware as a command to initiate the spryte rendering operation (106).

-1-

METHOD FOR CONTROLLING A SPRYTE RENDERING PROCESSOR

5

10   A portion of the disclosure of this patent document
contains material which is subject to copyright
protection. The copyright owner has no objection to the
facsimile reproduction by anyone of the patent document
or the patent disclosure as it appears in the U.S.
15   Patent and Trademark Office patent file or records, but
otherwise reserves all copyright rights whatsoever.

CROSS-REFERENCE TO RELATED APPLICATIONS
        This application is related to:
20   PCT Patent Application Serial No. PCT/US92/09349,
entitled AUDIO/VIDEO COMPUTER ARCHITECTURE, by inventors
Mical et al., filed concurrently herewith, Attorney
Docket No. MDIO4222, and also to U.S. Patent Application
Serial No. 07/970,308, bearing the same title, same
25   inventors and also filed concurrently herewith;
        PCT Patent Application Serial No. PCT/US92/09342,
entitled RESOLUTION ENHANCEMENT FOR VIDEO DISPLAY USING
MULTI-LINE INTERPOLATION, by inventors Mical et al.,
filed concurrently herewith, Attorney Docket No.
30   MDIO3050, and also to U.S. Patent Application Serial No.
07/970,287, bearing the same title, same inventors and
also filed concurrently herewith;
        PCT Patent Application Serial No. PCT/US92/09348,
entitled METHOD FOR GENERATING THREE DIMENSIONAL SOUND,
35   by inventor David C. Platt, filed concurrently herewith,
Attorney Docket No. MDIO4220, and also to U.S. Patent
Application Serial No. 07/970,274, bearing the same

-2-

title, same inventor and also filed concurrently
herewith;

PCT Patent Application Serial No. PCT/US92/09350,
entitled METHOD FOR CONTROLLING A SPRYTE RENDERING
5   PROCESSOR, by inventors Mical et al., filed concurrently
herewith, Attorney Docket No. MDIO3040, and also to U.S.
Patent Application Serial No. 07/970,278, bearing the
same title, same inventors and also filed concurrently
herewith;
10   PCT Patent Application Serial No. PCT/US92/09462,
entitled SPRYTE RENDERING SYSTEM WITH IMPROVED CORNER
CALCULATING ENGINE AND IMPROVED POLYGON-PAINT ENGINE, by
inventors Needle et al., filed concurrently herewith,
Attorney Docket No. MDIO4232, and also to U.S. Patent
15   Application Serial No. 07/970,289, bearing the same
title, same inventors and also filed concurrently
herewith;

PCT Patent Application Serial No. PCT/US92/09460,
entitled METHOD AND APPARATUS FOR UPDATING A CLUT DURING
20   HORIZONTAL BLANKING, by inventors Mical et al., filed
concurrently herewith, Attorney Docket No. MDIO4250, and
also to U.S. Patent Application Serial No. 07/969,994,
bearing the same title, same inventors and also filed
concurrently herewith;
25   PCT Patent Application Serial No. PCT/US92/09461,
entitled IMPROVED METHOD AND APPARATUS FOR PROCESSING
IMAGE DATA, by inventors Mical et al., filed
concurrently herewith, Attorney Docket No. MDIO4230, and
also to U.S. Patent Application Serial No. 07/970,083,
30   bearing the same title, same inventors and also filed
concurrently herewith; and

PCT Patent Application Serial No. PCT/US92/09384,
entitled PLAYER BUS APPARATUS AND METHOD, by inventors
Needle et al., filed concurrently herewith, Attorney
35   Docket No. MDIO4270, and also to U.S. Patent Application

SUBSTITUTE SHEET

-3-

Serial No. 07/970,151, bearing the same title, same
inventors and also filed concurrently herewith.

The related patent applications are all commonly
assigned with the present application and are all
5   incorporated herein by reference in their entirety.

DESCRIPTION OF RELATED ART

1.   Field of the Invention

The invention relates generally to image data
10   processing, and more particularly, to techniques for
controlling a spryte engine to perform functions related
to shadowing, highlighting and other functions, on a
source image which is to be mapped and rendered onto a
destination grid.

15   2.   Description of Related Art

In recent years, the presentation and pre-
presentation processing of visual imagery has shifted
from what was primarily an analog format to an
essentially digital format. Unique problems come to
20   play in the digital processing of image data. The
problems include providing adequate storage capacity for
digital image data and maintaining acceptable data
throughput rates. In addition, there is the problem of
creating a sense of realism in digitally generated
25   imagery, particularly in animated imagery.

The visual realism of imagery generated by digital
video game systems, simulators and the like can be
enhanced by providing special effects such as shadowing,
highlighting and so forth. For example, when the image
30   of an airplane is to be displayed flying over a flat
terrain on a sunny day, the realism of the overall scene
is enhanced by generating a shadow image of the airplane
within the image of the terrain. The effect appears
more realistic when the terrain region onto which the

-4-

shadow is projected becomes dimmed rather than completely blackened. The observer continues to see part of the texture of the terrain even though it is covered by the airplane's shadow. The effect is

5   referred to as "shadowing."

    Highlighting is another example of realism-imparting effects. Suppose an explosive device is displayed detonating near the airplane. Visual realism is enhanced by momentarily increasing the brightness

10 (highlighting) of the airplane's image to create the impression that light from the explosion is reflecting off the airplane's fuselage. The effect appears more realistic when certain brightness and/or colorization relationships between different parts of the airplane

15 (e.g., cockpit, fuselage, wings) are maintained.

    Home game systems, such as the Sega "Genesis" have a two-source image merging system for creating shadowing and highlighting effects on-the-fly (in real time). When the shadow effect is desired, a first source "tile"

20 or "sprite" (rectangular block of bit-mapped data representing the airplane shadow region) is overlaid with a second source tile representing the underlying terrain. For every pixel position where the first (shadow) sprite intensity is non-zero, a digital signal

25 representing the corresponding terrain intensity in the second tile is cut in half to thereby produce a "dimming" effect. The dimmed version of the terrain tile is then output as part of the video image. (The dimmed image data is not stored in memory however.)

30 To produce the highlighting effect, the Sega "Genesis" system divides the shading value of all pixels within the airplane's sprite by two and then adds half the maximum shading value to each such pixel. This preserves the relative shading relation between parts of

35 the airplane while making each brighter. The augmented

-5-

version of the airplane tile is then output as part of the video signal, but not saved. It is not possible to both shade and highlight a tile at the same time in the Sega "Genesis™" system.

The above-described shadowing and highlighting techniques are of limited use. Optically-complex animated scenes require much more. Consider for example a scene in a Knights of the Realm kind of game. The hero enters the arch chamber of a church. Stained glass windows of different elevations, colorations, transparencies, shapes and angles surround the chamber. A villain is to be seen through the stained glass windows, approaching from the outside of the chamber at an angle relative to the stained glass windows. The scene is to be projected through, or displayed on, a two-dimensional window (hereafter, the observation plane). For added realism, the position of the observation plane (the window through which the game player views the scene) is to rotate slowly about the hero, thus giving a three-dimensional quality to the displayed two-dimensional scene.

Realistic rendering of such a scene has to take into consideration the transformation of outside light as the light passes at various angles through the stained glass windows to the observation plane. It also has to take into account the reflection of internal lighting off the stained glass windows toward the observer's plane. Moreover, if the villain throws a rock through one of the stained glass windows, the visual effects of the hole have to replace those of the removed window material. If the villain flings mud onto a window, the transparency and coloration of the affected window regions have to change accordingly.

Previously available home-game systems (e.g. Nintendo Entertainment System, Sega Genesis) were not

-6-

capable of handling such optically-complex animated
scenes in real time. Some commercial imaging systems
such as the Silicon Graphics "Iris™" system do provide
mechanisms for handling optical complexities in real

5   time, but this is made possible only through the use of
high speed computers, large memories and special custom
circuitry. These commercial systems are therefore
available only at very high cost.

Heretofore, a low cost system for providing

10   realistic renditions of complex animated scenes has not
been available.

Digital graphic processing also relies on the
physical transformation of digital signals representing
image data from one organizational format to another.

15   Part or all of the transformed image data is then
displayed on an appropriate display means (e.g., a
cathode ray tube or a liquid crystal display).

In many instances, it is desirable to transform
digital image data from one format to another at

20   relatively high speed. This is done to create a sense
of animation in displayed images and to create a sense
of real-time responsiveness to user inputs in the case
of interactive systems. Such high-speed transformation
is referred to as real-time digital graphic processing.

25   Real-time digital graphic processing is particularly
useful in flight or other simulation systems,
interactive game systems and the like.

One function that is often called for in real-time
digital graphic processing is the mapping of a source

30   image onto a destination surface. Typically, the source
image comprises one or more pixels each of which is
filled with a particular color or shade. The mapping
function can be a one-to-one copying of pixels from a
source area to a destination area. Or alternatively,

35   the mapping function can include a transformation of

-7-

size, and/or a change of shape (e.g., skew) and/or a
rotation of some angle plus a change of colors or image
brightness.

By way of example, consider a simulated scene in a
5   real-time military game. An airplane is to be pictured
on a display panel such that it appears to be flying
towards or away from a viewer. The viewer controls at
least part of the action on the display by way of real-
time controls (e.g., a joystick). If the airplane is
10   to be seen flying towards the viewer, its image becomes
larger as its apparent distance from the viewer
decreases. Conversely, if the airplane is to be seen
flying away from the viewer, its image becomes smaller
as its distance from the viewer increases. Moreover, if
15   the airplane performs a roll during its flight, its
image has to rotate.

If an explosive device ignites near the airplane as
the airplane flies by, the displayed brightness of the
aircraft body should increase momentarily to simulate
20   reflection of light from the explosion off the fuselage
of the airplane.

The airplane may have transparent components, such
as a large bubble-shaped cockpit window; or a hole on
part of its body, the hole being one that is suddenly
25   created by a striking projectile. In such cases, it is
desirable to show background scenery passing
transparently through the cockpit window and/or body
hole as the airplane flies in front of a background
scene.

30   An animated real-time scene of this type can be
produced on a display means in a number of ways.

A brute force approach would separately generate
each frame of the animated scene data in its entirety,
store the generated frame data in high speed memory
35   (e.g., video RAM) and transfer each complete frame

-8-

(background plus airplane) to the display means at an appropriate frame rate. This brute-force approach wastes memory space and demands high-speed performance from the processing circuitry that generates the

5   sequential frames of image data.

A better approach relies on the concept of sprite painting. One area of memory stores nonchanging, background image data and a second area of memory stores the image data of the airplane and other moving bodies.

10 With each displayed frame, the image of the airplane is mapped from the second memory area onto the background image of the first memory area. The mapping function changes with time to provide size enlargement or reduction and rotation over time. The mapping function

15 also provides changes of color and/or brightness to simulate various illuminations such as that from a nearby explosion.

Ideally, it should be possible to take any source image and produce a mapping of it which includes

20 arbitrary amounts of enlargement or reduction in size. It should be possible to project the mapped copy onto a destination grid with or without rotation and/or shape distortion (skew). It should also be possible to project the mapped copy onto a destination grid with or

25 without changes of color.

High-performance electronic computer systems are available for transforming image data in such a manner, such as the Silicon Graphics Iris™ system mentioned above. Such systems rely on complex software-controlled

30 data transformations and bulk transfers of image data from one memory region to another. A general purpose computing unit is burdened with the task of supporting all calculations. Unfortunately, these computer systems suffer from drawbacks such as excessive cost, large

-9-

circuit size, complexity and/or slow image rendition speed.

A need exists within the industry for a compact image-rendering system that can be implemented at low cost on one or a few integrated circuit (IC) chips and can nonetheless perform high-speed complex image transformations.

A need also exists to control such an image-rendering system with a plurality of software routines or primitives which can be called by higher level routines in a logical, basically self-evident manner, so that the detailed complexities of the image-rendering system can be hidden. Such routines should also provide protection from unintentional misuse of the image-rendering system.

SUMMARY OF THE INVENTION

According to the invention, roughly described, linked lists of spryte control blocks are prepared in memory and traversed by a spryte rendering engine. Each spryte control block controls the rendering of a respective spryte into the display buffer, and contains such information as a pointer to source data for the corresponding spryte, positional and perspective specifications for a destination quadrilateral, a control word for manipulations to be performed on the spryte image source data, and an indication of which of several available formats the spryte image source data is packed in. A spryte control block can also control the spryte rendering engine to modify a portion of existing display data, using either new spryte image source data or constant data. Once the linked list is prepared, the spryte rendering engine can be called by writing certain values into specific memory-mapped hardware registers, and then writing dummy data to an

-10-

address recognized by the hardware as a command to initiate the spryte rendering operation.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described with respect to particular embodiments thereof, and reference will be made to the drawings, in which:

Fig. 1 is a block diagram of major components of a hardware system in which the invention may be used;

Fig. 2 is a symbolic block diagram of the address manipulator of Fig. 1;

Fig. 3 is a block diagram of part of the address generator of Fig. 2;

Fig. 4 is a block diagram of the stack address logic of Fig. 3; and

Fig. 5 is a block diagram of left address pad logic of Fig. 3.

DETAILED DESCRIPTION

The embodiments described herein are intended to operate on hardware systems such as that described in the related AUDIO/VIDEO COMPUTER ARCHITECTURE application the related IMPROVED METHOD AND APPARATUS FOR PROCESSING IMAGE DATA application and the related SPRYTE RENDERING SYSTEM WITH IMPROVED CORNER CALCULATING ENGINE AND IMPROVED POLYGON-PAINT ENGINE application. These applications are incorporated herein by reference, and the description of the hardware described in such applications need not be repeated here. Certain information set forth below, however, will be useful to an understanding of the present invention.

I.   Overall Hardware Architecture

Fig. 1 is a block diagram showing major components of the hardware system. It comprises a CPU 102, which

-11-

may be an ARM 60 RISC processor manufactured by Advanced
RISC Machines, Ltd., Swaffham Bulbeck, Cambridge, U.K.
The ARM 60 is described in Advanced RISC Machines, "ARM
60 Datasheet" (1992), incorporated herein by reference.
5   The address bus 104, which is provided as an input to an
address manipulator chip 106. The address manipulator
chip 106 contains, among other things, an address
generator for providing DMA-generated addresses to
system memory, as well as addresses from other sources;
10   a D-bus arbiter; two spryte engines; and interfaces to
a player bus, a slow bus and a set of external
processors. The address manipulator chip 106 generates
addresses for system memory 108, which includes a left
memory bank 108A and a right memory bank 108B. System
15   memory is 32-bits wide, the high-order 16 bits of each
32-bit word being in left memory 108A and the low-order
16 bits being in right memory 108B. The CPU 102
addresses system memory only in words, but the address
manipulator chip 106 can address each half of the memory
20   entirely independently. Address manipulator chip 106
provides addresses and control signals to left memory
108A over an LA bus 110 and an LCTL bus 112,
respectively, and provides addresses and control signals
to right memory 108B over an RA bus 114 and RCTL bus
25   116, respectively.

        System memory 108 can include one or two "sets" of
video RAM (VRAM) and zero, one or two sets of DRAM. A
set VRAM contains 512 k bytes of left memory and 512 k
bytes of right memory, for a total of one megabyte. A
30   set of DRAM is, depending on the system configuration,
one, four or 16 megabytes long. As with VRAM, half of
each set is located in the left bank of memory and the
other half is located in the right bank of memory.
However, unlike VRAM, DRAM is always accessed in full

-12-

32-bit words.   System memory 108 is considered big-endian.

All of the left and right bank system memory sets receive the respective left and right half addresses generated by the address manipulator chip 106. All of the left bank sets also include a data port which are coupled bi-directionally with a left half data bus D(31:16) 118. Similarly, the data ports of all of the sets of right bank memory are coupled bi-directionally with a right half data bus D(15:0) 120. The VRAM sets also have a serial port S, which is coupled bi-directionally with an S(31:0) bus 122.

Address manipulator chip 106 also provides and receives control signals to and from the CPU 102 over lines 128, and is also coupled bi-directionally with the left and right data buses 118 and 120. Address manipulator chip 106 also interfaces to a slow bus 130, which is an 8-bit bus for accessing such devices as a CPU ROM 132, a battery-backed SRAM, and/or various front panel devices 134. It may also support additional CPU-accessible RAM, and may also support an FM sound generator device. The slow bus 130 includes 14 bits of the address bus 104 A(16:2), an 8-bit data bus PD(7:0), a PDRDB read strobe, a PDWRB write strobe, and various control lines. PDRDB and PDWRB are used to carry the two low-order address lines for accessing the 8-bit wide CPU ROM 132.

Address manipulator chip 106 also interfaces to a player bus 136, which is used to connect the system to various user input/output devices such as joysticks, 3-D glasses, hand controllers and steering wheels, and and game saver cartridges. Address manipulator chip 106 is also coupled to a control bus 138, which is used to send and receive control signals to and from other processors in the system of Fig. 1.

-13-

The system of Fig. 1 further includes an audio/video processor chip 140 which is coupled bi-directionally to both halves 118 and 120 of the D-bus, and coupled to receive data from the 32-bit wide S bus 122. Audio/video processor chip 140 is also coupled to the control bus 138, and is coupled to receive address bits A(15:2) from the system address bus 104. The audio/video processor chip 140 generally includes display path circuitry, an audio subsystem, timers, an interrupt controller, an expansion bus interface and a watchdog timer. The expansion bus interface couples to an expansion bus 142 which includes control lines 144 and an 8-bit bus 146 carrying multiplexed address and data information. The expansion bus 142 supports such devices as CD/CD-ROM player 148 and optional expansion bus RAM 150. The CD/CD-ROM player 148 is built into the housing of the system of Fig. 1 and provides the primary mechanism by which software (including the routines described herein) is loaded into the system for execution on the CPU 102.

The audio/video processor 140 communicates with audio/video output circuitry 152 via audio lines 157, control lines 156, and a 12-bit AD bus 158. The audio/video output circuitry 152 generally generates the video timing and output video waveforms. It provides a composite video output, an RF output for connection to a standard television, an SVHS output, and separate left and right audio signal outputs.

The system of Fig. 1 also includes a decompression co-processor 166 which is coupled to the control bus 138, to bits A(15:2) of the system address bus 104, and to both halves 118 and 120 of the D bus. Decompression co-processor 166 is used to decompress software which is loaded into the system from the CD/CD-ROM player 148 or from another source.

-14-

A section of system memory starting at address zero
and extending to either 0, 8, 16 or 32 K bytes, may be
defined as SYSRAM. The size selection is made by the
software. The address manipulator chip 106 contains
5   protections which prevent user software from writing to
or reading from SYSRAM. Only software running in the
supervisor mode of the CPU 102 may write to SYSRAM.

All of the system address and timing signals are
generated by the address manipulator chip 106. Any
10   requests for access to system memory from either the CPU
102 or the audio/video processor 140 pass through the
address manipulator chip 106.

Except for the allocation of SYSRAM, and except for
a 1 megabyte limitation on data structures which are
15   expected to be shifted out the S-port of a video RAM,
present only because of physical VRAM boundaries, the
restrictions on where various portions of a software
application may be located in system memory are minimal.
In a minimum system, with only one megabyte of system
20   memory (VRAM), the low 64k 32-bit words might contain
CPU instructions and data. The next 300k bytes might
contain uncompressed 8-bit image source data, and the
next 172k bytes might contain audio and other data. The
next 150k bytes might be allocated for one frame buffer
25   (320 by 240 pixels by two bytes per pixel), and the last
150k bytes might be allocated for a second frame buffer.

Frame buffers are arranged so that even number data
lines reside in the left memory bank and odd number data
lines reside in the right memory bank. Pixels are
30   represented as 16-bit values divided as follows: five
bits to represent a red pen number, five bits to
represent a green pen number, four bits to represent a
blue pen number, and two subposition bits H and V. In
an alternative data format, one of the H or V bits is
35   replaced by a fifth blue pen number bit. When a pixel

-15-

value is transmitted down the display path, a color
look-up table translates each 4- or 5-bit pen number to
an 8-bit value for the corresponding color DAC. The
color look-up table can be updated prior to each scan
5   line. Pixels are stored at a low resolution of 320 by
240 pixels per frame, and the H and V subposition bits
indicate which quadrant of the low-resolution pixel area
the designated color is actually considered to be
located in.

10   Fig. 2 is a symbolic block diagram showing major
functional units of the address manipulator chip 106 of
Fig. 1. It comprises an internal 32-bit MDT data bus
202, an internal 32-bit MADR address bus 204. The MDT
data bus 202 is coupled to the left and right half
15   system D-bus 118, 120 via buffers 222. The chip 106
also includes a CPU interface unit 206 which is coupled
to receive CPU-generated addresses over the A-bus 104,
and also communicates with the CPU 102 over control
lines 128. Among the control lines 128 is an MCLK
20   signal provided by the CPU interface 106 to the MCLK
input of CPU 102, which is the memory clock input of CPU
102. Address manipulator 106 controls the waveform of
this clock signal to both stretch CPU cycles for slow
accesses and to put the CPU 102 to sleep for long
25   periods of time. The ARM 60 CPU is a static part which
does not need maintain any minimum clock input
frequency.

        Addresses generated by the CPU 102 are passed by
the CPU interface 206 to an address generator 208 when
30   a D-bus arbiter 210 grants control of the D-bus and
address generator 208 to the CPU 102. The address
generator 208 drives the high-order address bits from
A(31:16) onto the MADR bus 204, where they are decoded
by an address decoder 212. Address decoder 212
35   determines from these bits whether the desired address

-16-

represents a memory-mapped hardware register, in which case it activates the appropriate select line to notify the appropriate hardware component in the system of Fig. 1. That hardware component then performs the desired function in response to bits A(15:2) of system address bus 104. If address decoder 212 determines that the desired address is part of system memory 108, then it so notifies the address generator 208. Address generator 208 generates the appropriate addressing and control signals on the LCTL and LA buses 112 and 110, and the RCTL and RA buses 116 and 114.

Address generator 208 receives addresses from the CPU via the CPU interface 206 and also from spryte engine 214. Address generator 208 also maintains a stack of DMA control information and can generate addresses for DMA transfers. The D-bus arbiter 210 receives requests from the various devices for transfers over the D-bus, arbitrates among them, and indicates to address generator 208 which request to service. Even though the two halves of system memory are addressed and controlled separately, only one master may be operational at a time. If the winning requestor has requested a DMA transfer, then the D-bus arbiter 210 supplies the address generator 208 with a DMA group address indicating where in the DMA stack the desired control information may be found for the requested transfer. In effect, the DMA group address identifies a particular DMA channel. The DMA interface is handled entirely within the address manipulator chip 106.

The spryte engine 214 is coupled to the internal MDT data bus 202, and the functions and operation of the spryte engine 214 are described in more detail below.

Address manipulator chip 106 also includes a player bus interface 216 and a slow bus interface 218, for interfacing respectively to the player bus 136 and the

-17-

slow bus 130. These need not be described here in detail.

D-bus arbiter 210 receives requests from various requestors for access to the D-bus and D-port of system memory 108. When D-bus arbiter 210 grants the bus to a particular requestor, it sends an acknowledge signal to the requestor. The details of the D-bus arbiter need not be described here, except to note that the CPU 102 is intentionally given the lowest priority in the arbitration for access to the D-bus port of system memory 108 because in the architecture of Fig. 1, the CPU 102 is conceived to perform housekeeping functions only. All the other functional units in the system are more tightly coupled with the memory than the CPU is, so they can perform their functions at high speed. In the past, the requirement that the CPU perform many of the detailed functions of an interactive multi-media system either limited the performance and realism of the system, or mandated the use of a powerful and expensive CPU, or both.

II.   Spryte Manipulation Subsystem

The spryte engine 214 (Fig. 2) is described in detail in the related SPRYTE RENDERING SYSTEM WITH IMPROVED CORNER CALCULATING ENGINE AND IMPROVED POLYGON-PAINT ENGINE and IMPROVED METHOD AND APPARATUS FOR PROCESSING IMAGE DATA applications. Without repeating those descriptions, it is useful to note here that whereas conventional imaging systems are built around the concept of a "sprite", the embodiment described herein refers instead to a "spryte". The difference in spelling is intentional. A conventional sprite consists of a rectangularly-shaped area of image data, with all scan lines of a conventional sprite having the same length. A "spryte", on the other hand, is defined

-18-

herein as a compilation of horizontal scan-lines
extending from, and to the right of, a vertical
(hypothetical) spryte edge line where each scan line
includes data representing a number of successive source
5   pixels.   The length of each spryte scan-line is
independently controlled by an EOL (end-of-line)
terminating code or other appropriate means. The top
point on the spryte edge line is defined by a spryte
corner position. The total number of horizontal lines
10   which collectively define a spryte is given by a spryte
line count. A spryte can include scan-lines with no
pixels in them, and particular pixels within a spryte
can be designated as transparent. In effect, therefore,
a spryte can be thought of as having any shape that
15   might be desired.

III. Address Generator 208
     Fig. 3 is a block diagram of parts of address
generator 208 (Fig. 2). Fig. 4 is a block diagram of
20   stack address logic 336 (Fig. 3), and Fig. 5 is a block
diagram of the left and right address pad logic units
345, 353 (Fig. 3). These units are described in detail
in the above-mentioned AUDIO/VIDEO COMPUTER ARCHITECTURE
application and need not be repeated here.   It is
25   worthwhile noting, however, that CPU-originated
addresses and addresses originating from the spryte
engine are provided to the memory 108 via respective
input ports of a multiplexer 316. All other system
memory accesses are performed by DMA using the DMA stack
30   312.
     The 128 22-bit registers in the DMA stack 312 are
organized in groups, each group storing the information
required to control a respective DMA "channel". Each
group is located at a respective fixed set of addresses
35   in the DMA stack 312, and each channel is predefined to

-19-

control transfers from a particular source device to a
particular destination device.   Table I sets forth
certain information about the channels used for the
spryte engine:

5   TABLE I

Grouping Type	No. Groups	Registers Per Grp	Looping Available	Interrupts Available	Transfers Controlled	Channels Available	Max DMA Burst Len
Spryte Engine	1	8	No	No	Spryte control data	1	7 words
					PIP data	1	4 words
					Spryte source data start address	1	1 word
					Spryte image data	2	4 word

IV.   Spryte Control Block (SCoB)

20   Before describing how spryte source data is
provided to the spryte engine 214, it will be useful to
describe a data structure known as a spryte control
block (SCoB).   A SCoB controls the hardware operations
to be performed on a particular spryte.   Before invoking
25   the spryte engine 214, the CPU 102 prepares a linked
list of such SCoBs in system memory 108, and then loads
a memory-mapped register in the address generator 208 to
indicate where to find the first SCoB.
        The SCoB data structure contains the words set
30   forth in Table II below.

-20-

TABLE II

SCoB Data Structure

Number of Bits	Name	Description
32	FLAGS	Assorted flags. This is the first word read by the spryte-rendering hardware. (The flag bits are detailed in below TABLE III.)
24	NEXTPTR	Address of next SCoB to process. (Format is absolute or relative.) Spryte rendition takes place by stepping through a linked list having one or more SCoB's. After a first source spryte is mapped to, and painted onto a destination grid area defined by its SCoB, the spryte-rendering engine processes the next SCoB, if any, and renders its source spryte onto its designated destination surface. The linked list can be circular if desired so that the process is repeated iteratively.
24	SOURCEPTR	Address in system memory 108 of image data that is to be rendered as a spryte.
24	PIPPTR	Address in system memory 108 of Pen Index Palette (PIP) that is to be loaded into the IPS unit in spryte engine 214.
32	XPOS	Horizontal position (in 640-max pixels format) in the destination grid of the upper left corner of the to-be rendered spryte, including 16 bits which represent a fraction (noninteger) position-defining portion.
32	YPOS	Vertical position (in 480-max pixels format) in the destination grid of the upper left corner of the to-be rendered spryte, including 16-bit fraction part.
32	DX	Horizontal position increment from mapped first corner of a source pixel to mapped second corner of a source pixel when scanning and re-mapping the first spryte row onto the destination grid (format is two 16-bit half-words which are expressed in integer.fraction form as: 12.20).
32	DY	Vertical position increment from mapped first corner of a source pixel to mapped third corner of a source pixel when scanning and re-mapping the first spryte row (12.20).
32	LINEDX	Horizontal position increment in destination grid from top left corner of 1st mapped spryte row to top left corner of 2nd mapped spryte row (16.16).
32	LINEDY	Vertical position increment from 1st line to 2nd (16.16).
32	DDX	Increment to DX for each successive row after the 1st row of the spryte being rendered (12.20).
32	DDY	Increment to DY for each successive line processed (12.20) after 1st line.
32	PPMPC	PPMP control word (two halfwords: 16, 16) (See Table IV).

-21-

| 32 | PRE0 | Possible 1st preamble word. |
| 32 | PRE1 | Possible 2nd preamble word. |

5   The bits of the FLAGS word specified above are
defined as set forth in Table III. These flag bits
control specific fetching and rendering operations of
the spryte-rendering engine 214. The data specific
control bits are found in the preamble word of the
10 source data.

TABLE III

FLAGS Word

Bits	Name	Description
B31	=SKIP	If set, skip this SCoB.
B30	=LAST	If set, this is the last SCoB to process.
B29	=NPABS	1=Absolute, 0=Relative address for NEXTPTR.
B28	=SPABS	1=Absolute, 0=Relative for SOURCEPTR.
B27	=PPABS	1=Absolute, 0=Relative for PIPPTR.
B26	=LDSIZE	Load 4 words of size and slope data. (DX, DY, LINEDX, LINEDY).
B25	=LDPRS	Load 2 words of perspective (skew control) data. (DDX, DDY).
B24	=LDPPMP	Load new PPMP control word (PPMPC) into PPMP control registers.
B23	=LDPIP	Load new PIP data into PIP.
B22	=SCoBPRE	Preamble location. 1=At end of SCoB, 0=At start of source data.
B21	=YOXY	Translate the XY values to a system memory address value and write the corresponding data to the hardware.
B20:B19	= xx	Reserved.
B18	=ACW	Allow rendering of a CW (clock-wise) oriented destination pixel.
B17	=ACCW	Allow rendering of a CCW oriented destination pixel.
B16	=TWD	Terminate rendition of this Spryte if wrong direction is encountered (CW-CCW).

-22-

B15 = LCE   Lock the operations of the 2 corner-calculating engines together. (at H change).

B14 = ACE   Allow the second corner-calculating engine to function.

B13 = ASC   Allow Super-Clipping (the local switch is ANDed with ASCALL).

B12 = MARIA   1=disable full-math region-fill action and use only the faster Munkee decisions as instructions to the destination line-filler.

B11 = PXOR   1=set PPMP XOR mode. (XOR the A and B sources while disabling adder.)

B10 = USEAV   1=use the "AV" bits in PPMPC to control PPMP math functions.

B9 = PACKED   Primary source spryte type, 1=packed, 0=totally literal. (Secondary source spryte is always totally literal.)

B8:B7 = DOVER   D-Mode override. 00=use the D-bit generated by the IPS unit to select the output of CMUX , 01=reserved, 10=select the A input of the CMUX, 11=select the B input of the CMUX.

B6 = PIPPOS   Use PIP generated bits as the subposition bits (B0 & B15 of the Output-PEN signal) instead of the SCoB selection made below by B15POS and B0POS.

B5 = BGND   1=background spryte type.

B4 = NOBLK   1=no black spryte type.

B3:B0 = PIPA   PIP address bits, these are used to pad the 5-bit wide PIP address input signal when BPP (Bits Per Pixel) output of unpacker is less than 5 bits wide.

The PPMP control word (PPMPC) has two 16-bit wide halves. One half is used when the CMUX select control bit=0, the other half is used when the CMUX select control bit=1. The bits of only the upper half are defined as set forth in Table IV. The lower half has identical structure.

TABLE IV

PPMPC Word

Bits	Name	Description
B31	= S1	Select 1st multiplier input signal. 0=use IPN (Source A), 1=use cFB data (Source B).

-23-

B30:B29 = MS   Select 2nd multiplier input signal. 0=MxF (source is SCoB), 1=MUL (source is IPS), 2=IPNM (source is IPS), 3=xx (multiply by default value, 1 or 0).

B28:B26 = MxF   Multiply Factor. 0->7 means multiply by 1->8. (only used if MS=0).

B25:B24 = Dv1   First divide-by Scaling-factor. 1=divide by 2, 2=divide by 4, 3=+8, 0=divide by 16.

B23:B22 = S2   Selector of secondary input signal. 0="apply 0 value to Adder port B", 1=use AV word (from SCoB), 2=use cFBD (Source B), 3=use IPS output (Source A).

B21:B17 = AV   Adder Value. 5 bit value to be added if S2=1. This 5-bit signal is also used as a math control word if USEAV=1.

B16   = Dv2   Post addition, 2nd divider. 0=divide by 1, 1=divide by 2.

Aside from providing an "add value", the AV bits serve a secondary function as follows when USEAV=1. The secondary functions are set forth in Table V.

TABLE V

Secondary AV Bit Functions

Bits   Function

AV0   =   Invert the output of the second divider in the PMPP and set the carry-in of the adder.

AV1   =   Enable the sign-extend function for the signals flowing down the second math side of the PMPP (Post possible XOR).

AV2   =   Disable the wrap-limiter function. (Use the 5 LSB's of the 8-bit adder output and ignore possibility that it wrapped above decimal 31 or below decimal zero.)

AV3:AV4= Select second side divider value as: 00=divide by 1, 01=divide by 2, 10=divide by 4, 11=divide by __ (reserved).

There is also a general spryte-rendering engine control word, referred to as SCOBCTL0. It is loaded only by the CPU. Its bits are set forth in Table VI.

-24-

TABLE VI

SCOBCTL0 Engine Control Word

Bits		Name	Description
B31:B30	=	B15POS	B15 oPEN selector for output of PMPP. (This bit can function as a subposition defining bit that is used by the pre-display interpolater.) 0=0, 1=1, 2=xx, 3=same as Source data
B29:B28	=	B0POS	B0 oPEN selector for output of PMPP. (This bit can also function as a subposition defining bit that is used by the pre-display interpolater.) 0=0, 1=1, 2=PPMP math, 3=same as Source data
B27	=	SWAPHV	1=Swap the H and V subpositions prior to their entry into the PPMP
B26	=	ASCALL	1=Allow super clipping function (master enable switch)
B25	=	xx	Reserved
B24	=	CFBDSUB	1=use the H and V subposition bits of the cFB data in place of (vice) the spryte source values when the cFB data is selected as a PPMP source. (Note: CFBDsel=(S1=1) OR (S2=2).)
B23:B22	=	CFBDLSB	cFBD PPMP Blue LSB source. 0=0, 1=cFBD[B0], 2=cFBD[B4], 3=x
B21:B20	=	IPNLSB	IPN PPMP Blue LSB source. 0=0, 1=IPN[B0], 2=IPN[B4], 3=x

Note that when 'relative' has been specified in the flags for NEXTPTR, SOURCEPTR, or PIPPTR, the value that should (must) be placed in the SCoB is the word distance from the address in RAM that has the relative value in it to the address in RAM that is desired to be the new address MINUS FOUR. (REL= Target - PC - 4). Also note that the B0POS value of '2' is the only setting that uses PPMP math to control the B0 bit in the actually output oPEN signal. When this setting is chosen, the Blue LSB will also be included in the input parameters of the black detector.

There are 2 basic formats of Spryte image data, totally literal format and non-totally literal format. There are sub-groups within each basic format. In non-totally literal Sprytes, the image data consists of

-25-

groups of words that represent source scan lines of data. In totally literal Sprytes, the image data consists of purely image data (no intermingled control functions).

Non-totally literal Sprytes require one word preamble, whereas totally literal Sprytes require two words of preamble. These preamble words may be located at the end of the SCoB words (but before the PIP) as set forth in Table II, or at the start of the image data. The normal location for these words is at the start of the image data, but for totally literal Sprytes that are in frame buffer format, they are typically at the end of the SCoB that invokes that spryte.

Non-totally literal Sprytes can be compacted to save both memory space and rendering time. Each source scan line of data has its horizontal word size specified as part of the data. Totally literal Sprytes have a rectangular format that is specified in the preamble of the data.

The first preamble word for all sprytes is the data structure preamble. It contains the data-specific control bits for the source data, defined in Table VII.

TABLE VII

First Spryte Data Preamble Word

B31->B21	=	Reserved, set to 0.
B20	=	PACKED. This is identical to the PACKED bit in the SCoB
B19->B16	=	Reserved, set to 0.
B15->B6	=	VCNT Vertical number of source data lines in this image data, minus 1. (10 bits)
B5	=	Reserved, set to 0.
B4	=	LINEAR. 0=use PIP for generating IPN output of IPS unit, 1=use PIN for outputting IPN.

-26-

B3   =   REP8 1=replicate the bits in the linear 8 Spryte, 0=fill
                           with 0.

B2->B0   =   BPP   Bits/pixel, pixel type.

VCNT is loaded into a hardware counter in the Spryte requestor and is decremented at the end of the fetching of each source scan line of data. When the count is at -1, there are no more source lines of data in the object. Note that Spryte processing does not end here, this is merely one of the events that is required to end a Spryte. VCNT = line count -1.

An initial value of -1 for VCNT will cause a "REAL BIG Spryte" to be fetched. There is no 'zero line count' value.

The LINEAR bit applies only when the BPP type indicates 8 bits per pixel or 16 bits per pixel. In those cases, there are enough PIN bits to provide a 15 bit IPN without using the PIP. Since the PIN bits are spread linearly across the IPN, and it will result in a linear translation from PIN to IPN, the mode is called 'LINEAR'. The LINEAR bit should be set only for sprytes having 8 or 16 bits per pixel, known as LINEAR 8 and LINEAR 16 (as opposed to 'normal' 8 or 16) format.

The REP8 bit is effective only in the 8 bit per pixel source data size.

Table VIII defines the BPP control bits decode.

TABLE VIII

BPP Field

BPP	Data Size	PIP DMA Size	IPN Trans Bits	D-bit	R-Mul	G-Mul	B-Mul
0 =	Reserved	4 PIP words	Reserved		0	0	0
1 =	1 bit	4 PIP words	PIN[0]	PIP[15]	0	0	0
2 =	2 bit	4 PIP words	PIN[1:0] PIP[15]	0	0	0	
3 =	4 bit	8 PIP words	PIN[3:0] PIP[15]	0	0	0	
4 =	6 bit	16 PIP words	PIN[5:0] PIN[5]	0	0	0	
5 =	8 bit	16 PIP words	PIN[7:0] PIP[15]	PIN[7:5]	PIN[7:5]	PIN[7:5]	
6 =	16 bit	16 PIP words	PIN[14:0]	PIN[15]	PIN[13:11]	PIN[10:8]	PIN[7:5]
7 =	Reserved	16 PIP words	Reserved		0	0	0

-27-

If the PACKED bit in the SCoB is '0', then the source data is totally literal. For totally literal

5   Sprytes, there is a second preamble word. It contains, among other things, the horizontal pixel count for each line of the source data and the word offset from one line of source data to the next. These bits are valid only while the totally literal Spryte is being rendered,

10   and they are not used when the current Spryte is not totally literal. The bit fields of the second preamble word are defined in Table IX.

Table IX

15   Second Spryte Data Preamble Word

B31->B24   =   WOFFSET(8).   Word offset from one line of data to the next (-2) (8 bits). Bits 23->16 of offset are set to 0.

20   B25->B16   =   WOFFSET(10).   Word offset from one line of data to the next (-2) (10 bits). Bits 31->26 of offset are set to 0.

B15   =   Reserved,   Set to 0.

25   B14   =   NOSWAP   1=disable the SWAPHV bit from the general spryte control word.

B13->B12   =   TLLSB   IPN PPMP blue LSB source. 0=0, 1=IPN[0], 2=IPN[4], 3=IPN[5].

30   B11   =   LRFORM   Left/right format.

B10->B0   =   TLHPCNT   Horizontal pixel count (-1) (11 bits).

35   The TLLSB bits perform the same function that the IPNLSB bits perform in normal Sprytes.

If LRFORM=1, the source data has the frame buffer format of the screen as a source format. Vertically adjacent pixels in the rectangular display space are

40   horizontally adjacent in the 2 halves of a memory word. This is useful for the 16 bit per pixel totally literal data format. The unpacker in spryte engine 214 will disable the 'B' FIFO data requests and alternately place

-28-

pixels from the source into both FIFOs. Left 16 bits go
to 'A' FIFO, right 16 bits go to 'B' FIFO. The data
requests for 'A' FIFO are made in a request 'pair' to
minimize page breaks and other latencies. The hardware
5   locks the corner engines to operate together (regardless
of the LCE bit).

TLHPCNT is the number of pixels in the horizontal
dimension, minus 1. This is the number of pixels that
the spryte engine 214 will attempt to render for each
10   horizontal line of the Spryte source data. This value
is used by the data unpacker. A '0' value for TLHPCNT
will attempt one pixel. A '-1' value will attempt many
pixels. There is no 'zero pixel count' value.

WOFFSET is the offset in words of memory from the
15   start of one line of data to the start of the next line,
minus 2. If the BPP for this Spryte indicates an 8- or
16-bit per pixel format, WOFFSET(10) or WOFFSET(8) is
appropriate. This number is zero for the minimum sized
Spryte (2 words).

20   By arranging WOFFSET and TLHPCNT correctly, it is
possible to extract a rectangular area of data out of a
larger sized rectangular area of data.

The address generator 208 will also use WOFFSET as
the length value in the normal data fetch process.
25   WOFFSET and TLHPCNT must be set so that WOFFSET does not
expire first.

In the spryte packed data formats, the first one or
two bytes of data on each line of spryte source data
contain a word offset from the start of this line of
30   source data to the start of the next line of data, minus
2. In Sprytes having six or fewer bits per pixel, only
1 byte (bits 31:16) of offset are used. However, the
actual offset has a maximum size of 10 bits. The rest
of the bits in the 2 bytes are set to 0. 10 bits of
35   word offset is 2048 pixels at 16 bits per pixel. 8 bits

-29-

of word offset at 6 bits per pixel is 1365 pixels. The
requirement is 1280 pixels.

This offset is used by the address generator 208
both to calculate the start of the next line of spryte
5   source data (by adding it to the start of the current
line), and to set the maximum length (by subtracting 1
and placing it in the DMA stack length register) for the
current DMA transfer.

Also in packed spryte data formats, the next data
10   after the offset is a control byte and zero or more bits
of PIN data. The number of bits used for each PIN is
specified by BPP.

The control byte consists of a 2-bit code and a 6-
bit count, as follows:
15   00xxxxxx   end of line, xxxxxx need not be present
01count   literal PINs for 'count+1'
10count   Defined 'transparent' for 'count+1'
11count   packed 'PIN' for 'count+1'

20   The 'transparent' definition will actually output a
'transparent' bit from the unpacker. This will cause
the remainder of the pixel processing pipe to ignore
this pixel.

25   V.   Spryte Rendering Process

In order to render a spryte into an area of system
memory 108, the CPU 102 first sets up the required data
in a different area of the system memory 108. Such data
includes 6 to 15 32-bit words as specified in Table II
30   above, all located contiguously in system memory 108; 4,
8 or 16 optional 32-bit words contiguously located in
system memory 108 to represent PIP data; and spryte
image data of any length. Of the 6 to 15 words
specified in Table II, note that several groups are
35   optional as set forth more fully below. Note also that

-30-

the second word of the SCoB is a pointer to the next
SCoB to process; thus, the CPU may create a linked list
of any number of SCoBs to process in sequence, each
defining its own spryte source data, optional PIP data,
5   and spryte rendering control information.

Also prior to starting the spryte engine, the CPU
102 writes desired information directly into certain
memory-mapped hardware registers as follows:

SCOBCTL0.   32-bit word defined in Table VI above.

10   REGCTL0.   Controls the modulo for reading source
frame buffer data into the primary and/or secondary
input port of the spryte engine 214 and for writing
spryte image result data from the spryte engine 214 into
a destination frame buffer in system memory 108.   The
15   modulo effectively indicates the number of pixels per
scan line as represented in the respective frame buffer
in system memory 108.

Only the low-order 16 bits of REGCTL0 are used.   The
low-order 8 bits specify the modulo for the source frame
20   buffer, and the next 8 bits specify the modulo for the
destination frame buffer.   For each of the two modulo
designations, the low-order 4 bits specify a G1 value
and the high-order 4 bits specify a G2 value.   The
modulo specified for a particular buffer is then
25   calculated as G1+G2.   Thus the following bits of REGCTL0
are defined (CFBD refers to current frame buffer data,
a source buffer separate from spryte source data, which
the spryte engine may read as input data):

REGCTL0 BIT   DESCRIPTION

30   0   G1=32   for CFBD read buffer.
            1   Undefined. Set to 0.
            2   G1=256   for CFBD read buffer.
            3   G1=1024 for CFBD read buffer.
            4   G2=64   for CFBD read buffer.
35   5   G2=128   for CFBD read buffer.
            6   G2=256   for CFBD read buffer.
            7   Undefined. Set to 0.

```
          8           G1=32    for destination buffer.
          9           Undefined. Set to 0.
          10          G1=256   for destination buffer.
          11          G1=1024  for destination buffer.
  5       12          G2=64    for destination buffer.
          13          G2=128   for destination buffer.
          14          G2=256   for destination buffer.
          15          Undefined. Set to 0.
```

10   The software must ensure that no more than one bit
in each nibble is set. The hardware does not protect
against setting more than one bit. If no bits are set
in a nibble, the contribution to the resultant modulo is
zero.

15   REGCTL1.   X and Y clip values, effectively
indicating the number of pixels in the X and Y
dimensions which make up the frame buffer. Bits 26:16
indicate the last writeable row (counting from row 0) in
the Y dimension and bits 10:0 indicate the last
20 writeable column (counting from col. 0) in the X
dimension. All other bits must be zero. As an example,
a value of 00EF013F indicates that the frame buffer data
is represented in 320x240 format.

        REGCTL2. Read base address. Indicates the address
25 in system memory 108 of the upper left corner pixel of
the source frame buffer data.

        REGCTL3.   Write base address.   Indicates the
address in system memory 108 of the upper left corner
pixel of the destination frame buffer (CFBD).

30   Also before the spryte engine is started, the CPU
102 places the address of the first SCoB in the linked
list into the DMA stack 312 register corresponding to
"next SCoB". The CPU then writes to the memory mapped
address designated SPRSTRT in order to start the spryte
35 engine running. Once the spryte engine starts running,
it retains exclusive control of the D-bus until either
it finishes processing all the SCoBs in the list, or an
interrupt occurs. If an interrupt occurs, the spryte

-32-

engine continues to a convenient stopping point, then
releases the D-bus.   The CPU then vectors to an
appropriate interrupt handler, and when done, returns to
the routine which originally started the spryte engine.
5   That routine checks the status bit SPRON in a memory
mapped status bit register to determine whether the
spryte engine stopped due to an interrupt or due to
completion of processing, and if the former, restarts
the spryte engine.   In an alternative embodiment, the
10 CPU can have a separate bus to program memory, to
thereby permit the CPU 102 to perform other tasks while
the spryte engine 214 renders the sprytes.   In the
latter embodiment, the spryte engine can generate an
interrupt for the CPU 102 when spryte processing has
15 completed, at which time the CPU 102 can vector to an
interrupt handler.

The DMA stack 312 includes an 8-register grouping
for spryte control.   The eight registers are as follows:

        0   CURRENT SCOB ADDRESS
20   1   NEXT SCOB ADDRESS
        2   PIP ADDRESS
        3   SPRYTE DATA ADDRESS
        4   ENGINE A FETCH ADDRESS
        5   ENGINE A LENGTH
25   6   ENGINE B FETCH ADDRESS
        7   ENGINE B LENGTH

When the CPU writes to the SPRSTRT address, after
the spryte engine gains control of the system data bus
30 118, 120, the DMA engine of Figs. 3 and 4 loads in the
first six words from the first SCoB beginning from the
system memory address specified in the NEXT SCOB
register in the DMA stack 312.   To accomplish this, the
address of the first word to load is read out of the
35 NEXT SCOB register and provided to the memory address
lines via source multiplexer 314.   The address is also
incremented by adder/clipper 320 and written back via
multiplexer 310 into the CURRENT SCOB register in DMA

-33-

stack 312. All six words are read from memory in this
manner, the CURRENT SCOB register maintaining the
address of each next word to load.

The first SCoB word read, FLAGS, is written into a
5   32-bit hardware register in address manipulator chip
106. The next SCoB word read, NEXTPTR, is written into
the NEXT SCOB register in DMA stack 312. SOURCEPTR is
written into the SPRYTE DATA ADDRESS register of DMA
stack 312, and PIPPTR is written into the PIP ADDRESS
10   register in DMA stack 312. XPOS and YPOS are written to
two memory mapped hardware registers XYPOSH and XYPOSL,
each having the format of x,y. That is, the high-order
16 bits from XPOS and the high-order 16 bits from YPOS
are written to the high- and low-order half words,
15   respectively, of XYPOSH, and the low-order 16 bits of
XPOS and the low-order 16 bits of YPOS are written to
the high and low half words, respectively, of XYPOSL.

After the first six words of the SCoB are loaded,
depending on the bits which were set in FLAGS, up to
20   seven additional SCoB words are loaded. The possible
words are grouped as a single DMA transfer of up to
seven words. If the LDSIZE bit of FLAGS was asserted,
then the DMA controller of Figs. 3 and 4 expects the
first four words of this group of seven to be DX, DY,
25   LINEDX and LINEDY. These words are loaded in the same
manner as the first six words of the SCoB, the
incremented addresses being stored in the CURRENT SCOB
register in DMA stack 312. DX and DY are written in x,y
format into two memory mapped hardware registers DXYH
30   and DXYL, and LINEDX and LINEDY are written in x,y
format to two memory mapped hardware registers DDXYH and
DDXYL. Note that if the SKIP bit of the FLAGS word
equals one, indicating that the present SCoB is to be
skipped, or if the YOXY bit is zero, then the X and Y
35   values are not written to the hardware.

-34-

If the LDPRS bit of FLAGS was set, then the DMA control unit of Figs. 3 and 4 expects the first two words (or the next two words) of the optional seven to contain DDX and DDY. These are written in x,y format to

5   two memory mapped hardware registers DDXYH and DDXYL.

If the LDPPMP bit of the FLAGS word was set, then the DMA control unit of Figs. 3 and 4 expects the first (next) word of the optional seven words to be PPMPC. This word is written to a memory mapped PPMPC hardware

10   register.

After the second SCoB load of zero through seven words, the DMA control unit of Figs. 3 and 4 performs a preamble load of either one or two words. If the SCOBPRE bit of FLAGS was set, then the preamble word(s)

15   is (are) assumed to be at the end of the SCoB, in which case the CURRENT SCOB register in DMA stack 312 contains the address of the first preamble word. If SCOBPRE was not set, then the preamble word(s) is (are) assumed to be at the start of the data, in which case the SPRYTE

20   DATA ADDRESS contains the address of the first preamble word. The DMA control unit selects the appropriate register source for the starting address of the preamble load and returns the incremented addresses to the same register.

25   The first preamble word is always present and is loaded into the appropriate hardware registers. The second preamble word is present only when the PACKED bit of the FLAGS word was zero, indicating that the spryte image data is in "totally literal" format. When the DMA

30   unit reads this word, the information in the WOFFSET field is written to an offset register and the information in the TLHPCNT field is written to a pixel count register in the hardware. The offset indicates the width of the totally literal spryte in memory, and

35   is used by the DMA controller to calculate the start of

-35-

each next line of the spryte source data. The pixel
count indicates the number of pixels to be transferred
on each scan line of totally literal spryte source data.
These two values are settable independently in order to
5   permit the transfer of only a rectangular portion of a
larger bit image, smaller than the overall bit image
both in width and height.

After the preamble load, if the LDPIP bit of the
FLAGS word was set, the DMA control unit will read out
10   4, 8 or 16 words of PIN to IPN conversion information,
beginning from the address in the PIP ADDRESS register
in the DMA stack 312. Incremented addresses are also
rewritten into the same DMA stack register. The number
of 4-word bursts to perform (if any) depends on the data
15   compression format of the spryte image source data,
which is specified in the BPP ("bits per pixel") field
of the first preamble word. In particular, as set forth
in Table VIII above, a total of four PIP words will be
loaded for BPP = 0, 1 or 2; eight PIP words will be
20   loaded if BPP = 3; and 16 PIP words will be loaded if
BPP = 4, 5, 6 or 7. Note that since PIP data in system
memory 108 is referenced indirectly, the same PIP data
may be downloaded from multiple SCoBs. Also, the PIP
may be loaded even if it will not be used to decompress
25   the current spryte image source data (which is the case
if the LINEAR bit of the first preamble word is one).
For loads of all 16 PIP words, the entire PIP is
overwritten. For loads of fewer than 16 words, the PIPA
field of the FLAGS word indicates the starting address
30   in the PIP for receiving the data.

After the PIP load, the DMA unit of Figs. 3 and 4
begins transferring spryte image source data from system
memory 108 to the data input FIFOs of the spryte engine
214. As set forth above, if the spryte image source
35   data is packed (i.e. not in totally literal format),

-36-

then at the beginning of each scan line of spryte source
data, the first one or two bytes of the first word
contain a word offset from the start of the current line
of source data to the start of the next line of source

5   data, minus 2.   This offset is used by the DMA
controller both to calculate the start of each next line
of source data and to set the length of a DMA transfer
of the line of source data.   Accordingly, the DMA
controller reads this word from the address specified

10   in the SPRYTE DATA ADDRESS register of the DMA stack
312, incrementing the address and placing it into the
ENGINE A FETCH ADDRESS register of the DMA stack 312.
The high-order 8 or 10 bits of this word are placed into
the ENGINE A LENGTH register of the DMA stack 312, and

15   the entire word is also sent to the spryte engine data
input FIFO for corner engine A. The spryte engine knows
to ignore this word. Note that if the spryte image
source data is in totally literal format, then the
single offset value (as well as the pixel count value)

20   specified in the second preamble word and described
above applies to the entire spryte.

The offset is loaded, the DMA controller then
transfers additional words of spryte image source data
for the current scan line in bursts of up to four words

25   each, as requested by the spryte engine 214.   The
starting address for each burst is found in the ENGINE
A FETCH ADDRESS register of DMA stack 312, and the
incremented addresses are placed in the same register.
Correspondingly, the DMA controller decrements the value

30   in the ENGINE A LENGTH register of DMA stack 312
according to the number of words transferred.

The DMA controller also updates the SPRYTE DATA
ADDRESS register in DMA stack 312 by adding the offset
specified in the first word of the scan line, so that

-37-

that register always points to the next scan line to be processed.

Note that on the conditions described in the above-mentioned SPRYTE RENDERING SYSTEM WITH IMPROVED CORNER
5   CALCULATING ENGINE AND IMPROVED POLYGON-PAINT ENGINE APPLICATION, the spryte engine 214 can also request DMA transfers of 4-word bursts of the next scan line of spryte image source data into the corner engine B data input FIFO, using the ENGINE B FETCH ADDRESS and ENGINE
10   B LENGTH registers. In this manner, both corner engines A and B in the spryte engine 214 can operate on different scan lines of spryte image source data simultaneously, and the DMA controller can burst data to each as independently requested.
15   Note that there are a number of invalid SCoB bit settings which are not protected against in the hardware. The software must ensure that these combinations are never asserted. Among these combinations are:
20   1. If the LINEAR bit is set in the first spryte data preamble word, and BPP is set for 8 bits per pixel, then the D-mode selection in the DOVER field of the FLAGS word must not be set to use the choice determined by BPP.
25   2. If LINEAR is selected, then BPP must be set to be either 8 or 16 bits per pixel.

3. The BPP field and the LINEAR setting in the SCoB must match the format of the incoming source data. If they do not, then the results are unpredictable.
30   These are some examples; there are many others.

VI.   Software Routines

Before setting forth software routines which may be used for implementing the invention, it will be useful

-38-

to set forth the following C language type definitions
and macro definitions:

```
/* copyright 1992 The 3DO Company */

/* The SCB_RELATIVE macro takes the absolute address of an object and returns
 * the sort of relative address needed by the spryte engine. The first
 * argument is the absolute address of the field to receive the relative
 * address, and the second argument is the absolute address of the object
 * to be referenced.
 *   For instance, to create a relative pointer to a "next spryte"
 * these arguments would be used:
 *     SCB_RELATIVE( &spryte->scb_NextPtr, &NextSpryte );
 * To make sure the spryte indicates that the pointer to the next spryte is
 * relative, it might be desireable to first explicitly clear the control flag:
 *     ClearFlag( spryte->scb_Flags, SCB_NPABS );
 */
#define SCB_RELATIVE(field,linkobject) ((long)(linkobject)-(long)(field)-4)

#define RGB(a,b,c) (((a)<<10)|((b)<<5)|(c))
#define RGB2(a,b,c) (RGB(a,b,c)*0x00010001)

#define COLORENTRY(index,r,g,b) ((((uint32)(index)<<24)|((uint32)(r)<<16) \
                    |((uint32)(g)<<8)|((uint32)(b))))

#define MAKE_REGCTL1(width,height) (((width-1)<<REG_XCLIP_SHFT)\
                    |((height-1)<<REG_YCLIP_SHFT))


typedef long  Color;
typedef long  Coord;
typedef long  RGB888;


typedef struct Point
    {
    Coord point_X, point_Y;
    } Point;


typedef struct Rect
    {
    Coord rect_XLeft, rect_YTop, rect_XRight, rect_YBot;
    } Rect;
```

A. Screen and Bitmap Routines

The spryte engine 214 is advantageously controlled
using three software data structures known as Screen,
ScreenGroup and Bitmap. These structures are owned by
the system as opposed to a user task, and in order to
prevent illegal combinations of control information from
reaching the hardware, the information in these
structures can be modified only by a routine running in
the supervisor mode of the CPU 102. The following are

-39-

type definitions for the Screen, ScreenGroup and Bitmap
data structures.

```
/* copyright 1992 The 3DO Company */

5    typedef struct Screen
         {
         ItemNode scr;

         ScreenGroup *scr_ScreenGroupPtr;

10       VDLEntry *scr_VDLPtr;
         int32   scr_VDLType;

         Bitmap *scr_TempBitmap;
         List scr_BitmapList;
15       } Screen;


         typedef struct ScreenGroup
             {
20           {ItemNode sg;

             /* display location, 0 = = top of screen */
             long sg_Y;

25           /* total height of each screen */
             long sg_ScreenHeight;

             /* display height of each screen (can be less than the screen's
              * actual height)
30            */
             long sg_DisplayHeight;
             } ScreenGroup;


35   typedef struct Bitmap
         {
         ItemNode bm;

         ubyte *bm_Buffer;

40       int32 bm_Width;
         int32 bm_Height;
         int32 bm_ClipWidth;
         int32 bm_ClipHeight;
         int32 bm_VerticalOffset;
45       int32 bm_Flags;

         int32 bm_SCOBCTL0;
         int32 bm_REGCTL0;
         int32 bm_REGCTL1;
50       int32 bm_REGCTL2;
         int32 bm_REGCTL3;
         } Bitmap;
```

55   As can be seen, the Bitmap structure includes
certain global information about a destination buffer

-40-

(typically but not exclusively a display buffer) into which the spryte engine 214 is to render sprytes. Such global information includes the base address of the buffer (bm_Buffer), its width, height and
5   characteristics (bm_Width, bm_Height and bm_Flags, respectively), clipping widths and heights (bm_ClipWidth and bm_ClipHeight) beyond which the spryte engine 214 need not render sprytes, a vertical offset value (bm_VerticalOffset), and values for the five spryte
10 engine control registers (bm_SCOBCTL0, bm_REGCTL0, bm_REGCTL1, bm_REGCTL2, bm_REGCTL3). The Screen structure points to a Bitmap structure to be displayed, and a ScreenGroup structure, as well as containing certain other information about the display.

15   The following are some sample routines to manipulate Bitmaps, ScreenGroups and Screens. Though some of these routines are trivial, it is advantageous that they be provided anyway as operating system routine callable by a user program. In this manner they can run
20 in the supervisor mode of CPU 102.

```
/* copyright 1992 The 3DO Company */

int32
SetClipWidth( Item bitmapItem, ulong clipwidth )
/* Set the bitmap's clipping width */
{
    int32 retvalue;
    Bitmap *bitmap;

    /* This routine needs to be in supervisor mode */

    bitmap = (Bitmap *)CheckItem( bitmapItem, NODE_GRAPHICS, TYPE_BITMAP );
    if ( NOT bitmap )
        {
        retvalue = -1201;
        goto DONE;
        }

    if ( clipwidth > bitmap->bm_Width )
        {
        retvalue = -1202;
        goto DONE;
        }
```

-41-

```
        bitmap->bm_ClipWidth = clipwidth;
        bitmap->bm_REGCTL1 = MAKE_REGCTL1( bitmap->bm_ClipWidth,
            bitmap->bm_ClipHeight );

5       retvalue = 0;

    DONE:
        return( retvalue );
    }


10  int32
    SetClipHeight( Item bitmapItem, ulong clipheight )
    /* Set the bitmap's clipping height */
    {
        int32 retvalue;
15      Bitmap *bitmap;

        /* This routine needs to be in supervisor mode */

        bitmap = (Bitmap *)CheckItem( bitmapItem, NODE_GRAPHICS, TYPE_BITMAP );
20      if ( NOT bitmap )
            {
            retvalue = -1301;
            goto DONE;
            }

25      if ( clipheight > bitmap->bm_Height )
            {
            retvalue = -1302;
            goto DONE;
            }

30      bitmap->bm_ClipHeight = clipheight;
        bitmap->bm_REGCTL1 = MAKE_REGCTL1( bitmap->bm_ClipWidth,
            bitmap->bm_ClipHeight );

        retvalue = 0;

35  DONE:
        return( retvalue );
    }


40  Item
    CreateScreenGroup( Item *screenItemArray, CreateScreenArgs *stargs )
    {
        Item sgitem;
        ScreenGroup *sgptr;
45      Screen *screen;
        Item retvalue;
        int32 currentHeight, width;
        VDLEntry *vdl, *vdl2, *vdl3, **vdlptr;
        Bitmap *bitmap;
50      Item bitmapitem;
        ubyte **bufptr, **bufptr2, *zbufptr, *prevbufptr;
        int32 *widthptr, *heightptr;
        Item *iptr;
        int32 i, i2, i3, size, color;

55      /* This routine needs to be in supervisor mode */

        SDEBUG( ("CreateScreenGroup( screenItemArray=$%lx, stargs=$%lx\n",
```

-42-

```
                    screenItemArray, stargs) );

        retvalue = 0;
        sgitem = 0;

5       sgitem = SuperCreateItem( MKNODEID(NODE_GRAPHICS,TYPE_SCREENGROUP), NULL );
        SDEBUGVDL(("CreateItem returned 0x%x\n",sgitem));
        if ( (int32)sgitem < 0 )
            {
            /* couldn't allocate screen group item */
10          retvalue = -3001;
            goto DONE;
            }

        /* Initialize the ScreenGroup item */
15      sgptr = (ScreenGroup *)LocateItem( sgitem );
        SDEBUGVDL( ("LocateItem returned 0x%x\n",sgptr) );

        sgptr->sg_DisplayHeight = stargs->st_DisplayHeight;
        sgptr->sg_ScreenHeight = stargs->st_ScreenHeight;

20      iptr = screenItemArray;
        bufptr = stargs->st_BitmapBufArray;
        vdlptr = stargs->st_VDLPtrArray;
        for ( i = 0; i < stargs->st_ScreenCount; i++ )
            {
25          *iptr = SuperCreateItem( MKNODEID(NODE_GRAPHICS, TYPE_SCREEN),
                    NULL );
            if( *iptr < 0 )
                {
                retvalue = *iptr; /* couldn't allocate screen item */
30              goto DONE;
                }
            screen = (Screen *)LocateItem( *iptr );
            screen->scr_ScreenGroupPtr = sgptr;
            iptr++;
35          SDEBUG(("screen=$%lx\n", (unsigned long)(screen)));

            InitList( &screen->scr_BitmapList, "ScreenBitmapList" );

            heightptr = stargs->st_BitmapHeightArray;
40          widthptr = stargs->st_BitmapWidthArray;
            currentHeight = 0;
            for ( i2 = 0; i2 < stargs->st_BitmapCount; i2++ )
                {
                bitmapitem = SuperCreateItem( MKNODEID(NODE_GRAPHICS, TYPE_BITMAP),
45                  NULL);
                if ( bitmapitem < 0 )
                    {
                    retvalue = bitmapitem; /* couldn't allocate bitmap item */
                    goto DONE;
50                  }
                bitmap = (Bitmap *)LocateItem( bitmapitem );
                AddTail( &screen->scr_BitmapList, (Node *)(&bitmap->bm) );

                bitmap->bm_Buffer = *bufptr++;
55              if ( widthptr ) bitmap->bm_Width = *widthptr++;
                else bitmap->bm_Width = GrafBase->gf_DefaultDisplayWidth;
                bitmap->bm_ClipWidth = bitmap->bm_Width;
                if ( heightptr ) bitmap->bm_Height = *heightptr++;
                else bitmap->bm_Height = stargs->st_ScreenHeight;
60              bitmap->bm_ClipHeight = bitmap->bm_Height;
                bitmap->bm_Flags = 0;
```

```
        switch ( bitmap->bm_Width )
            {
            case  32:
                i3 = G1_RMOD32|G1_WMOD32; break;
            case  64:
                i3 = G2_RMOD64|G2_WMOD64; break;
            case  96:
                i3 = G1_RMOD32|G2_RMOD64|G1_WMOD32|G2_WMOD64; break;
            case 128:
                i3 = G2_RMOD128|G2_WMOD128; break;
            case 160:
                i3 = G1_RMOD32|G2_RMOD128|G1_WMOD32|G2_WMOD128; break;
            case 256:
                i3 = G1_RMOD256|G1_WMOD256; break;
            case 288:
                i3 = G1_RMOD32|G2_RMOD256|G1_WMOD32|G2_WMOD256; break;
            case 320:
                i3 = G1_RMOD256|G2_RMOD64|G1_WMOD256|G2_WMOD64; break;
            case 384:
                i3 = G1_RMOD256|G2_RMOD128|G1_WMOD256|G2_WMOD128; break;
            case 512:
                i3 = G1_RMOD256|G2_RMOD256|G1_WMOD256|G2_WMOD256; break;
            case 1024:
                i3 = G1_RMOD1024|G1_WMOD1024; break;
            case 1088:
                i3 = G1_RMOD1024|G2_RMOD64|G1_WMOD1024|G2_WMOD64; break;
            case 1052:
                i3 = G1_RMOD1024|G2_RMOD128|G1_WMOD1024|G2_WMOD128; break;
            case 1280:
                i3 = G1_RMOD1024|G2_RMOD256|G1_WMOD1024|G2_WMOD256; break;
            default:
                SDEBUG(("CreateScreenGroup() bad bitmap width=%d ($%lx)\n",
                    bitmap->bm_Width));
                retvalue = -3007;
                goto DONE;
            }
        bitmap->bm_REGCTL0 = i3;
        bitmap->bm_REGCTL1 = MAKE_REGCTL1( bitmap->bm_ClipWidth,
            bitmap->bm_ClipHeight );
        bitmap->bm_REGCTL2 = (int32)bitmap->bm_Buffer;
        bitmap->bm_REGCTL3 = (int32)bitmap->bm_Buffer;

        bitmap->bm_SCOBCTL0 = (0xC0000000 & B15POS_MASK)
                | (0x20000000 & B0POS_MASK)
                | (0x00400000 & CFBDLSB_MASK)
                | (0x00100000 & IPNLSB_MASK);

        bitmap->bm_VerticalOffset = currentHeight;
        currentHeight += bitmap->bm_Height;
        }
    }

    retvalue = sgitem;

DONE:
    if ( retvalue < 0 )
        {
        if ( sgitem > 0 ) SuperexternalDeleteItem( sgitem );
        }
    return( retvalue );
    }
```

-44-

```
      DisplayScreen( Item ScreenItem0, Item ScreenItem1 )
      {
          Screen *scr0, *scr1;
5         ScreenGroup *sg;
          int32 retvalue;

          /* This routine needs to be in supervisor mode */

10        SDEBUGVDL(("DisplayScreen( %x, %x )\n", ScreenItem0, ScreenItem1));

          scr0 = (Screen *)CheckItem( ScreenItem0, NODE_GRAPHICS, TYPE_SCREEN );
          if ( ScreenItem1 )
              scr1 = (Screen *)CheckItem( ScreenItem1, NODE_GRAPHICS, TYPE_SCREEN );
15        else
              scr1 = scr0;

          if (( scr0 == NULL ) || ( scr1 == NULL ))
              {
20            /* invalid screen items */
              retvalue = -3009;
              goto DONE;
              }

25        sg = scr0->scr_ScreenGroupPtr;
          if ( sg NOT = scr1->scr_ScreenGroupPtr )
              {
              /* screen items must be in the same screen group */
              retvalue = -3010;
30            goto DONE;
              }

          /* Designate that these are the screens that should be displayed */
          GrafBase->gf_CurrentVDLEven = scr0->scr_VDLPtr;
35        GrafBase->gf_CurrentVDLOdd = scr1->scr_VDLPtr;

          retvalue = 0;

      DONE:
40        return( retvalue );
      }
```

45   The following routine illustrates how to directly modify a bitmap of a buffer.

```
      /* copyright 1992 The 3DO Company */

      int32
50    WritePixel( Item bitmapItem, Coord x, Coord y, Color color )
      /* Write a pixel in the foreground color to the current screen */
      {
          ubyte *ptr;
          int32 retvalue;
55        Bitmap *bitmap;

          /* This routine needs to be in supervisor mode */

          bitmap = (Bitmap *)CheckItem( bitmapItem, NODE_GRAPHICS, TYPE_BITMAP );
```

```
        if ( NOT bitmap )
          {
          retvalue = -2001;
          goto DONE;
 5        }

        if ( x < 0 || x > = bitmap->bm_ClipWidth
             || y < 0 || y > = bitmap->bm_ClipHeight )
          {
10        retvalue = -2002;
          goto DONE;
          }

        ptr = bitmap->bm_Buffer
15            + (((y >> 1) * bitmap->bm_Width) << 2)
              + ((y & 1) << 1) + (x << 2);
        *ptr++ = (ubyte)(color >> 8);
        *ptr = (ubyte)color;

20      retvalue = 0;

      DONE:
          return( retvalue );
      }
```

25   The following routines read bitmaps directly. They
      do not need to be in supervisor mode.

```
      /* copyright 1992 The 3DO Company */

30    void *
      GetPixelAddress( Item screenItem, Coord x, Coord y )
      /* Return the address of the specified pixel in the screen.
       * A read outside the bitmap boundaries returns a value of NULL.
       */
35    {
          void *retvalue;
          Bitmap *bitmap;
          Screen *screen;

40      /* This routine can be in user mode */

        retvalue = NULL;

        screen = (Screen *)CheckItem( screenItem, NODE_GRAPHICS, TYPE_SCREEN );
45      if ( NOT screen ) goto DONE;

        bitmap = screen->scr_TempBitmap;

        if ( x < 0 || x > = (bitmap->bm_ClipWidth)
             || y < 0 || y > = (bitmap->bm_ClipHeight) )
50        goto DONE;

        retvalue = (void *)(bitmap->bm_Buffer
              + (((y >> 1) * bitmap->bm_Width) << 2)
55            + ((y & 1) << 1) + (x << 2));

      DONE:
```

-46-

```
        return( retvalue );
    }


5   Color
    ReadPixel( Item bitmapItem, GrafCon *gc, Coord x, Coord y )
    /* Read a pixel from the graphics context and return its value.
     * A read outside the bitmap boundaries returns a value of < 0.
     */
10  {
        ubyte *ptr;
        Color retvalue;
        Bitmap *bitmap;

15      /* This routine can be in user mode */

        bitmap = (Bitmap *)CheckItem( bitmapItem, NODE_GRAPHICS, TYPE_BITMAP );
        if ( NOT bitmap )
            {
20          retvalue = -2101;
            goto DONE;
            }

        if ( x < 0 || x >= bitmap->bm_ClipWidth
25              || y < 0 || y >= bitmap->bm_ClipHeight )
            {
            retvalue = -2102;
            goto DONE;
            }

30      ptr = (ubyte *)(bitmap->bm_Buffer
                + (((y >> 1) * bitmap->bm_Width) << 2)
                + ((y & 1) << 1) + (x << 2));
        retvalue = ( (Color)ptr[0] << 8 ) | (Color)ptr[1];

35  DONE:
        return( retvalue );
    }
```

40   B.   Spryte Rendering Routines

         As mentioned, the spryte engine 214 renders sprytes

in response to "spryte control blocks" (SCoBs) which

have been prepared and linked together in a list. The

software data structure for a SCoB (also called SCB) is

45 advantageously as follows:


```
    /* copyright 1992 The 3DO Company */

    /* Definition of spryte data structure */
50  typedef ulong SpryteData[];
```

-47-

```
/* Definition of spryte control block */
typedef struct SCB
    {
    ulong scb_Flags;

    struct SCB  *scb_NextPtr;
    SpryteData  *scb_SpryteData;
    void        *scb_PIPPtr;

    Coord scb_X;
    Coord scb_Y;
    long  scb_HDX;
    long  scb_HDY;
    long  scb_VDX;
    long  scb_VDY;
    long  scb_DDX;
    long  scb_DDY;
    ulong scb_PPMPC;
    ulong scb_PRE0;
    ulong scb_PRE1;
    } SCB;
```

Once a linked list of SCoBs has been prepared, the
following supervisor mode routines may be used to
initiate the spryte engine 214:

```
/* copyright 1992 The 3DO Company */

int32
DrawScreenSprytes( Item screenItem, SCB *scb)
/* Draw sprytes into the screen's bitmaps, following the SCB chain */
{
    Screen *screen;
    int32 retvalue;

    /* This routine should NOT be in supervisor mode */

    SDEBUG(("DrawScreenSprytes( "));
    SDEBUG(("screenItem=$%lx ", (unsigned long)(screenItem)));
    SDEBUG(("scb=$%lx ", (unsigned long)(scb)));
    SDEBUG((" )\n"));

    screen = (Screen *)CheckItem( screenItem, NODE_GRAPHICS, TYPE_SCREEN );
    if ( NOT screen )
        {
        retvalue = -1001;
        goto DONE;
        }

    retvalue = DrawSprytes( screen->scr_TempBitmap->bm.n_Item, scb );
    goto DONE;

    retvalue = 0;

DONE:
    return( retvalue );
}
```

```
       int32
       DrawSprytes( Item bitmapItem, SCB *scb )
 5     /* Draw sprytes into the bitmap, following the SCB chain */
       {
           int32 retvalue;
           Bitmap *bitmap;

10         /* This routine should be in supervisor mode */

           int32 timestamp;

           SDEBUG(("DrawSprytes( "));
15         SDEBUG(("bitmapItem=$%lx ", (unsigned long)(bitmapItem)));
           SDEBUG(("scb=$%lx ", (unsigned long)(scb)));
           SDEBUG((" )\n"));

           bitmap = (Bitmap *)CheckItem( bitmapItem, NODE_GRAPHICS, TYPE_BITMAP );
20         if ( NOT bitmap )
               {
               retvalue = -2111;
               goto DONE;
               }

25         timestamp = GrafBase->gf_VBLCount;

           *SCOBCTL0 = bitmap->bm_SCOBCTL0;
           *REGCTL0 = bitmap->bm_REGCTL0;
           *REGCTL1 = bitmap->bm_REGCTL1;
30         *REGCTL2 = bitmap->bm_REGCTL2;
           *REGCTL3 = bitmap->bm_REGCTL3;

           *NEXTPTR = (ulong)scb;

35         *SPRSTRT = 0;
           while( *STATBits & SPRON )
               {
       #ifdef AUTOKILL_SPRITE
               if ( GrafBase->gf_VBLCount - timestamp >= 3 )
40                 {
                   *SPRSTOP = 0;
                   retvalue = -666;
                   goto DONE;
                   }
45             else *SPRCNTU = 0;
       #else
               *SPRCNTU = 0;
       #endif /* #ifdef AUTOKILL_SPRITE */
               }

50         retvalue = 0;

       DONE:
           return( retvalue );
       }
```

55   As previously mentioned, the spryte engine 214 can

map a spryte source image onto a quadrilateral (proper

or degenerate) of any shape, given appropriate values in
the SCoB for that spryte. The following routine is
useful to help users calculate correct values for the
scb_X,   scb_Y,   scb_HDX,   scb_HDY,   scb_VDX,   scb_VDY,
5   scb_DDX and scb_DDY values in a SCoB, given the four
points of a destination quadrilateral in the destination
buffer.

```
/* copyright 1992 The 3DO Company */

10   void
     MapSpryte( SCB *scb, Point *quad, int32 width, int32 height )
     /* Take a spryte and create position and delta values to map
      * its corners onto the specified quadrilateral, whose points define the
      * corners of the quadrilateral in clockwise order starting from top-left.
15    */
     {
         int32 size;

         /* This routine should be in user mode */

20       size = width * height;
         scb->scb_X = ((quad[0].point_X << 16) & 0xffff0000) + 0x8000;
         scb->scb_Y = ((quad[0].point_Y << 16) & 0xffff0000) + 0x8000;
         scb->scb_HDX = ((quad[1].point_X - quad[0].point_X) << 20) / width;
         scb->scb_HDY = ((quad[1].point_Y - quad[0].point_Y) << 20) / width;
25       scb->scb_VDX = ((quad[3].point_X - quad[0].point_X) << 16) / height;
         scb->scb_VDY = ((quad[3].point_Y - quad[0].point_Y) << 16) / height;
         scb->scb_DDX = ((quad[2].point_X - quad[3].point_X
             - quad[1].point_X + quad[0].point_X) << 20) / size;
         scb->scb_DDY = ((quad[2].point_Y - quad[3].point_Y
30           - quad[1].point_Y + quad[0].point_Y) << 20) / size;
     }
```

        A wide variety of basic spryte rendering routines
35   may be built on the above primitives. These spryte
rendering routines may be written to merely create
appropriate SCoBs and link them into a list for
subsequent rendering by a routine such as DrawSprites,
or they may call the spryte engine 214 directly. Such
40   routines can include routines to draw horizontal or
vertical lines with specified endpoints, routines to
fill a specified rectangle, and routines to draw a line
from the current pen position of a graphics context to
a new position. These routines can all operate by

-50-

creating a SCoB which points to spryte image source data containing a single pixel of the current graphics context foreground color, and setting up appropriate values in scb_X, scb_Y, scb_hdx, scb_hdy, scb_vdx,
5   scb_vdy, scb_ddx and scb_ddy to have the spryte engine 214 expand the pixel to the desired shape. The routine can then either link the SCoB into a list or use a routine like DrawSprytes to call the spryte engine 214 immediately. Advantageously, routines such as these
10 utilize a GrafCon data structure to maintain "current" foreground and background colors, and "current" X and Y pen positions within a destination bitmap. Such a data structure may be defined as follows:

15 /* copyright 1992 The 3DO Company */

    /* Graphics Context structure */
    typedef struct GrafCon
        {
20   Node gc;
        Color gc_FGPen;
        Color gc_BGPen;
        Coord gc_PenX;
        Coord gc_PenY;
25   ulong gc_Flags;
        } GrafCon;

    Using the GrafCon structure, the following is an
30 example of a routine that uses DrawSprytes to call the spryte engine 214 to draw a line in a specified bitmap.

    /* copyright 1992 The 3DO Company */

35 /* A routine that draws a line to a Bitmap, using a Graphics Context */
    int32
    DrawTo(Item bitmapItem, GrafCon *gc, Coord x, Coord y)
    {
        SCB scb;
40   int32 sprytedata[3];
        Coord adx;
        int32 oldx, oldy;

        /* This routine doesn't need to be in supervisor mode */

45   oldx = gc->gc_PenX;
        oldy = gc->gc_PenY;

```
        gc->gc_PenX = x;
        gc->gc_PenY = y;

        /* Set up a data buffer to look like a literal sprite */
5       sprytedata[0] = ((1 - 1) << PRE0_VCNT_SHFT) | PRE0_LINEAR | PRE0_BPP_16;
        sprytedata[1] =((1 - 1) << PRE1_TLHPCNT_SHFT)
              | (0 << PRE1_WOFFSET10_SHFT);

        /* Put the foreground color into the literal data */
10      sprytedata[2] = gc->gc_FGPen << 16;

        /* Set up the sprite control block to refer to this type of sprite */
        scb.scb_Flags = SCB_ACW | SCB_ACCW | SCB_LAST | SCB_SPABS
                   | SCB_ACE | SCB_BGND | SCB_NOBLK
15                 | SCB_LDSIZE | SCB_YOXY | SCB_LDPPMP | SCB_LDPRS;
        scb.scb_PPMPC = (PPMP_MODE_NORMAL << PPMP_0_SHIFT)
                   | (PPMP_MODE_NORMAL << PPMP_1_SHIFT);
        scb.scb_SpryteData = (SpryteData *)(&sprytedata);

20      scb.scb_DDX = 0;
        scb.scb_DDY = 0;

        if ( y > = oldy )
            {
25          scb.scb_X = oldx << 16;
            scb.scb_VDX = (x << 16) - scb.scb_X;
            scb.scb_Y = oldy << 16;
            scb.scb_VDY = (y << 16) - scb.scb_Y;
            }
30      else
            {
            scb.scb_X = x << 16;
            scb.scb_VDX = (oldx << 16) - scb.scb_X;
            scb.scb_Y = y << 16;
35          scb.scb_VDY = (oldy << 16) - scb.scb_Y;
            }

        if ( scb.scb_VDX > = 0 ) adx = scb.scb_VDX;
        else adx = -scb.scb_VDX;

40      if (adx > = scb.scb_VDY)
            {
            scb.scb_HDX = 0;
            scb.scb_HDY = (-1) << 20;
            scb.scb_VDY += (1 << 16);
45          if (scb.scb_VDX > = 0)
                scb.scb_VDX += (1 << 16);
            else
                {
                scb.scb_VDX -= (1 << 16);
50              scb.scb_X += (1 << 16);
                }
            }
        else
            {
55          scb.scb_HDX = 1 << 20;
            scb.scb_HDY = 0;
            if (scb.scb_VDX > = 0) scb.scb_VDX += (1 << 16);
            else scb.scb_VDX -= (1 << 16);
            scb.scb_VDY += (1 << 16);
60          }
```

-52-

```
    return( DrawSprytes( bitmapltem, &scb ) );
}
```

5   The invention has been described with respect to particular embodiments thereof, and numerous modifications may be made without departing from its scope.

-53-

CLAIMS

1. A method for rendering a graphical image into a destination buffer, comprising the steps of:

preparing a control block in a memory; and

causing a graphics manipulation processor to render a sub-image into said destination buffer in response to said control block.

2. A method according to claim 1, wherein said control block is one of a linked list of control blocks, each carrying rendering information for a corresponding sub-image,

and wherein said step of causing comprises the step of causing said processor to begin sub-image rendering steps in response to sequential ones of said control blocks in said linked list.

3. A method according to claim 2, further comprising the step of displaying as a single image, the sub-images rendered into said destination buffer.

4. A method according to claim 1, wherein said control block is arranged contiguously in said memory.

5. A method according to claim 1, wherein said step of preparing a control block comprises the step of writing into said control block, a pointer to sub-image source data in said memory for use by said processor to render the sub-image corresponding to said control block.

6. A method according to claim 1, wherein said step of preparing a control block comprises the step of writing into said control block, a pointer to a data translation table for use by said processor to translate pixel color values in sub-image source data corresponding to said control block.

7. A method according to claim 1, wherein said step of preparing a control block comprises the step of writing into said control block, a plurality of flag

bits for use by said processor to process sub-image source data corresponding to said control block.

8. A method according to claim 1, wherein said step of preparing a control block comprises the step of writing into said control block, an indication of starting coordinates in said display buffer at which said processor is to begin rendering sub-image source data corresponding to said control block.

9. A method according to claim 1, wherein said step of preparing a control block comprises the step of writing into said control block, an indication of a number, DX and DY respectively, of horizontal and vertical pixels in said destination buffer by which said processor is to increment for each pixel rendered along a first line of sub-image source data corresponding to said control block.

10. A method according to claim 9, wherein said step of preparing a control block further comprises the step of writing into said control block, an indication of a number of horizontal and vertical pixels in said destination buffer by which said processor is to increment said values DX and DY, respectively, for each line rendered of said sub-image source data corresponding to said control block.

11. A method according to claim 1, wherein said step of preparing a control block comprises the step of writing into said control block, an indication of a number of horizontal and vertical pixels in said destination buffer by which said processor is to increment starting coordinates in said destination buffer at which said processor is to begin rendering a second line of sub-image source data corresponding to said control block, relative to starting coordinates in said destination buffer at which said processor is to

-55-

begin rendering a first line of sub-image source data
corresponding to said control block.

    12. A method according to claim 1, wherein said step
of preparing a control block comprises the step of
writing into said control block, an indication of which
of a plurality of available data compression formats is
used in sub-image source data corresponding to said
control block.

    13. A method according to claim 5, wherein said step
of preparing a control block further comprises the step
of writing to the beginning of said sub-image source
data in said memory, an indication of which of a
plurality of available data compression formats is used
in said sub-image source data in said memory.

    14. A method according to claim 1, further
comprising the step of writing a value to a control
register (REGCTL0) indicating the number of pixels which
said processor should consider as defining a scan line
in said destination buffer.

    15. A method according to claim 1, wherein said
processor combines said sub-image with an additional
image portion in rendering said sub-image into said
destination buffer,

    further comprising the step of writing a value to a
control register (REGCTL0) indicating the number of
pixels which said processor should consider as defining
a scan line in said additional image portion.

    16. A method according to claim 1, further
comprising the step of writing a value to a control
register (REGCTL3) indicating to said processor a base
address in said memory of said destination buffer.

    17. A method according to claim 1, wherein said
processor combines said sub-image with an additional
image portion in rendering said sub-image into said
destination buffer,

-56-

further comprising the step of writing a value to a control register (REGCTL2) indicating to said processor a base address in said memory of said additional image portion.

18. A method according to claim 1, further comprising the step of writing a horizontal clip value to a control register (REGCTL1), indicating to said processor that no destination pixels horizontally beyond said horizontal clip value need be rendered.

19. A method according to claim 1, further comprising the step of writing a vertical clip value to a control register (REGCTL1), indicating to said processor that no destination pixels vertically beyond said vertical clip value need be rendered.

20. A method for rendering a graphical image into a display buffer, comprising the steps of:

preparing a linked list of control blocks in a memory, each carrying rendering information for a corresponding sub-image; and

causing a graphics manipulation processor to begin sub-image rendering steps in response to sequential ones of said control blocks.

21. A computer-readable medium, for use with a CPU, a graphics manipulation processor and a memory, comprising:

first computer instructions, executable on said CPU, to prepare a control block in said memory; and

second computer instructions, executable on said CPU, to cause said graphics manipulation processor to render a sub-image into a destination buffer in said memory in response to said control block.
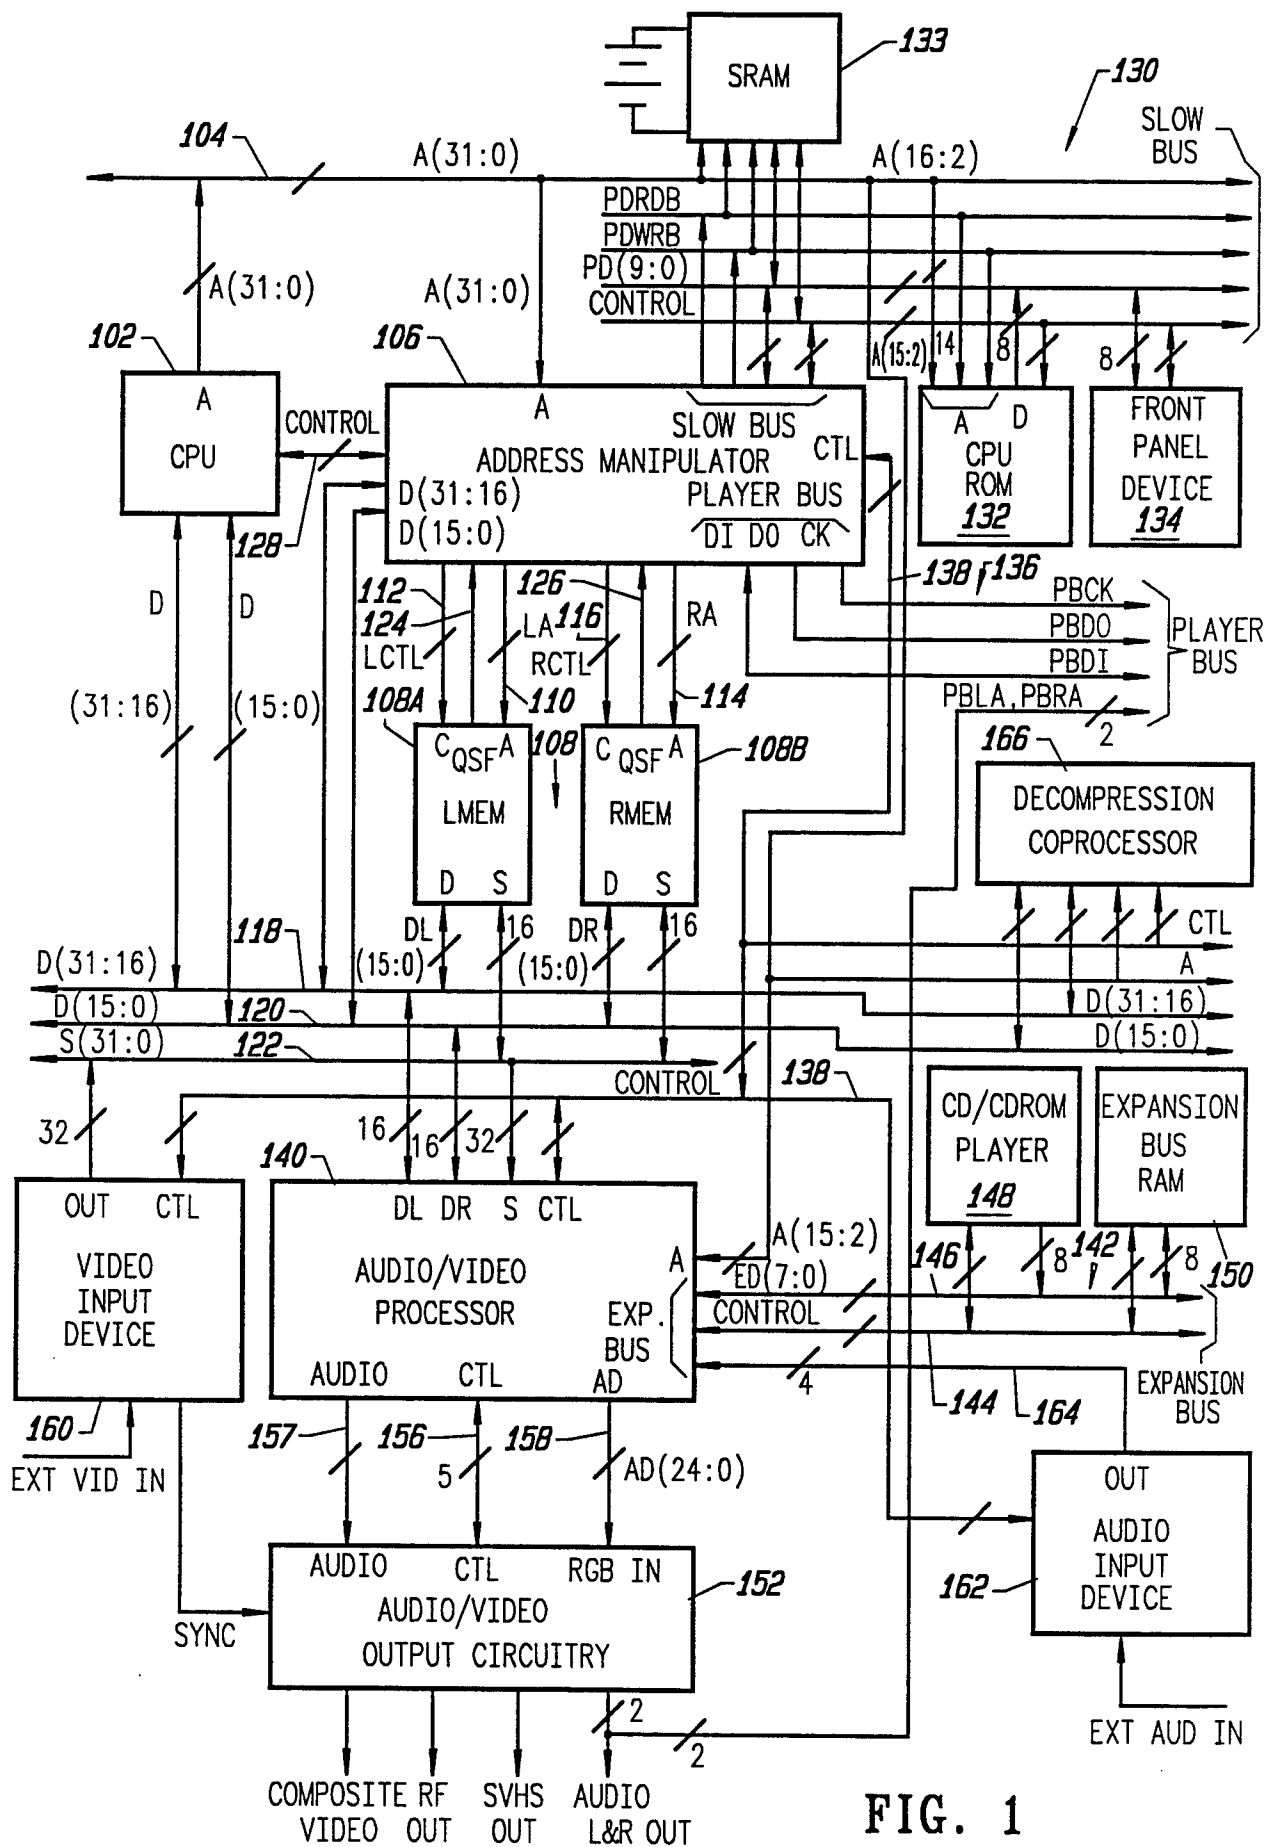
1/5

FIG. 1

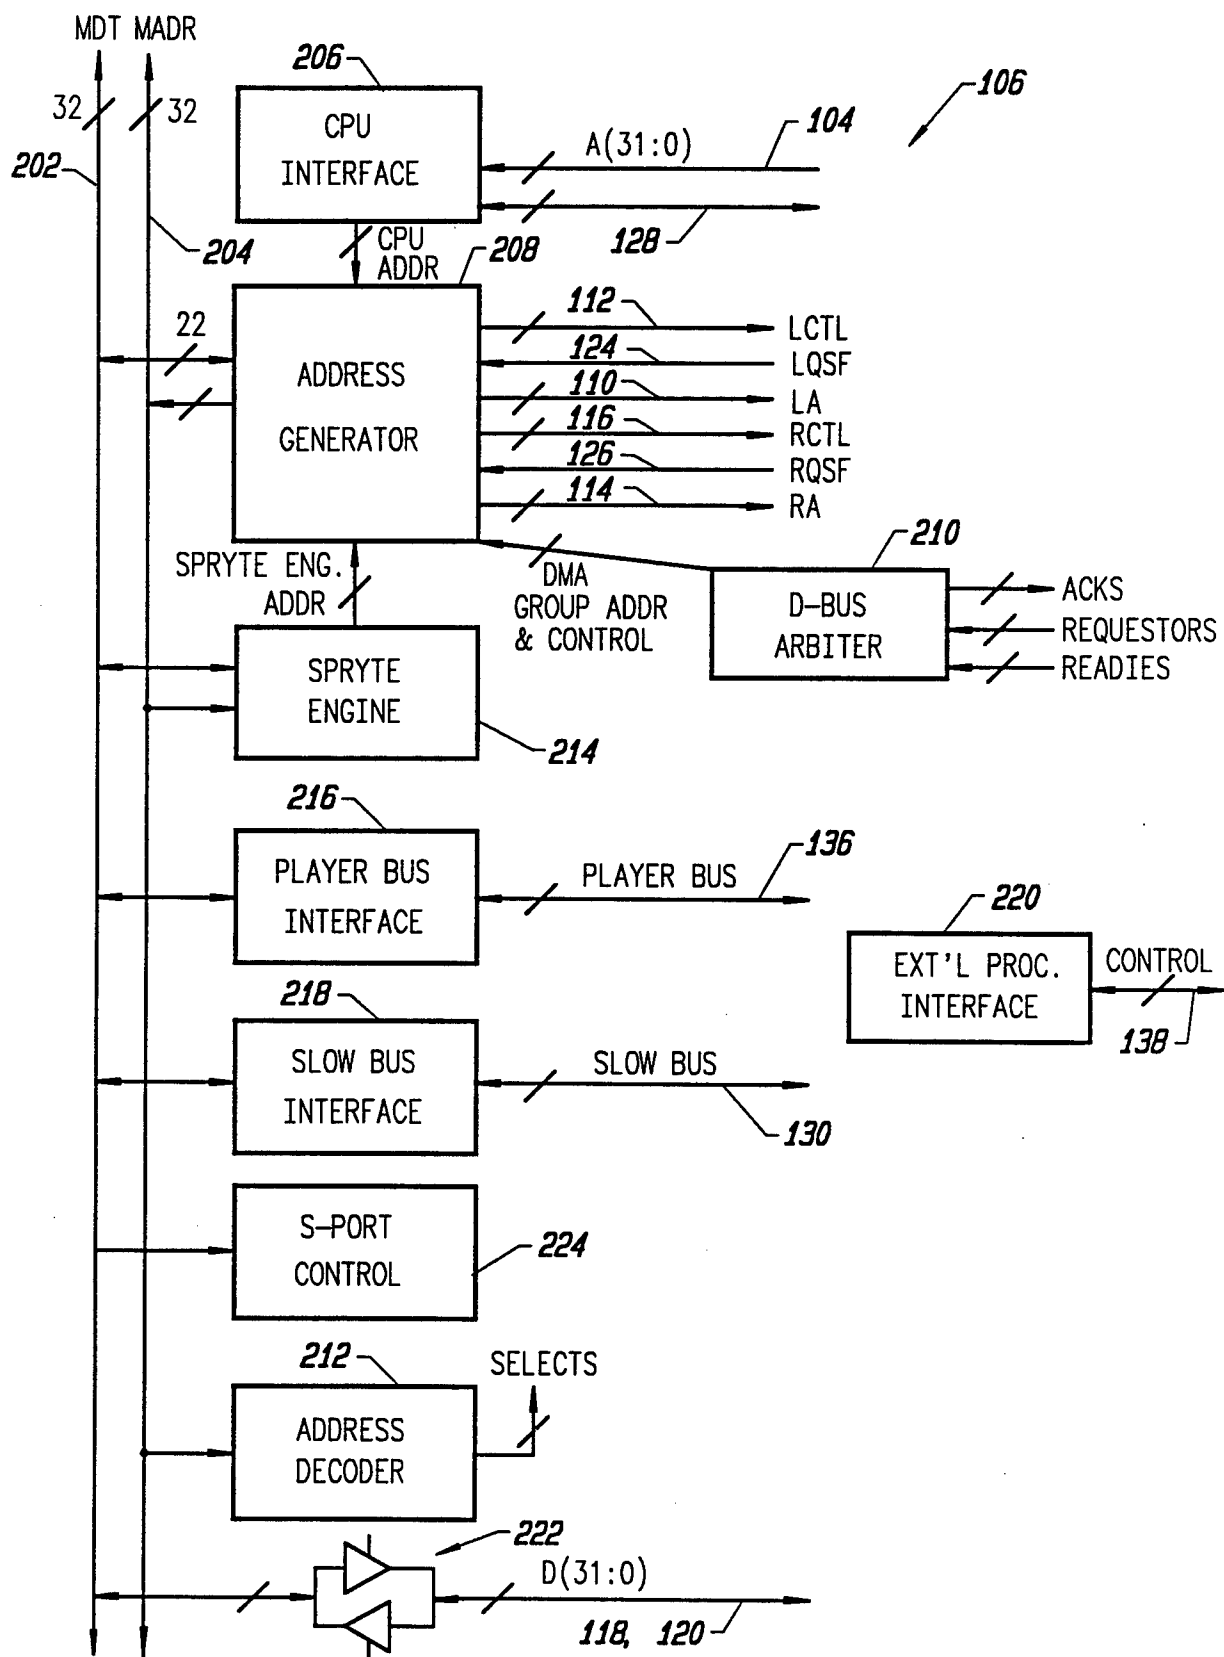FIG. 2

3/5

FIG. 3A

4/5
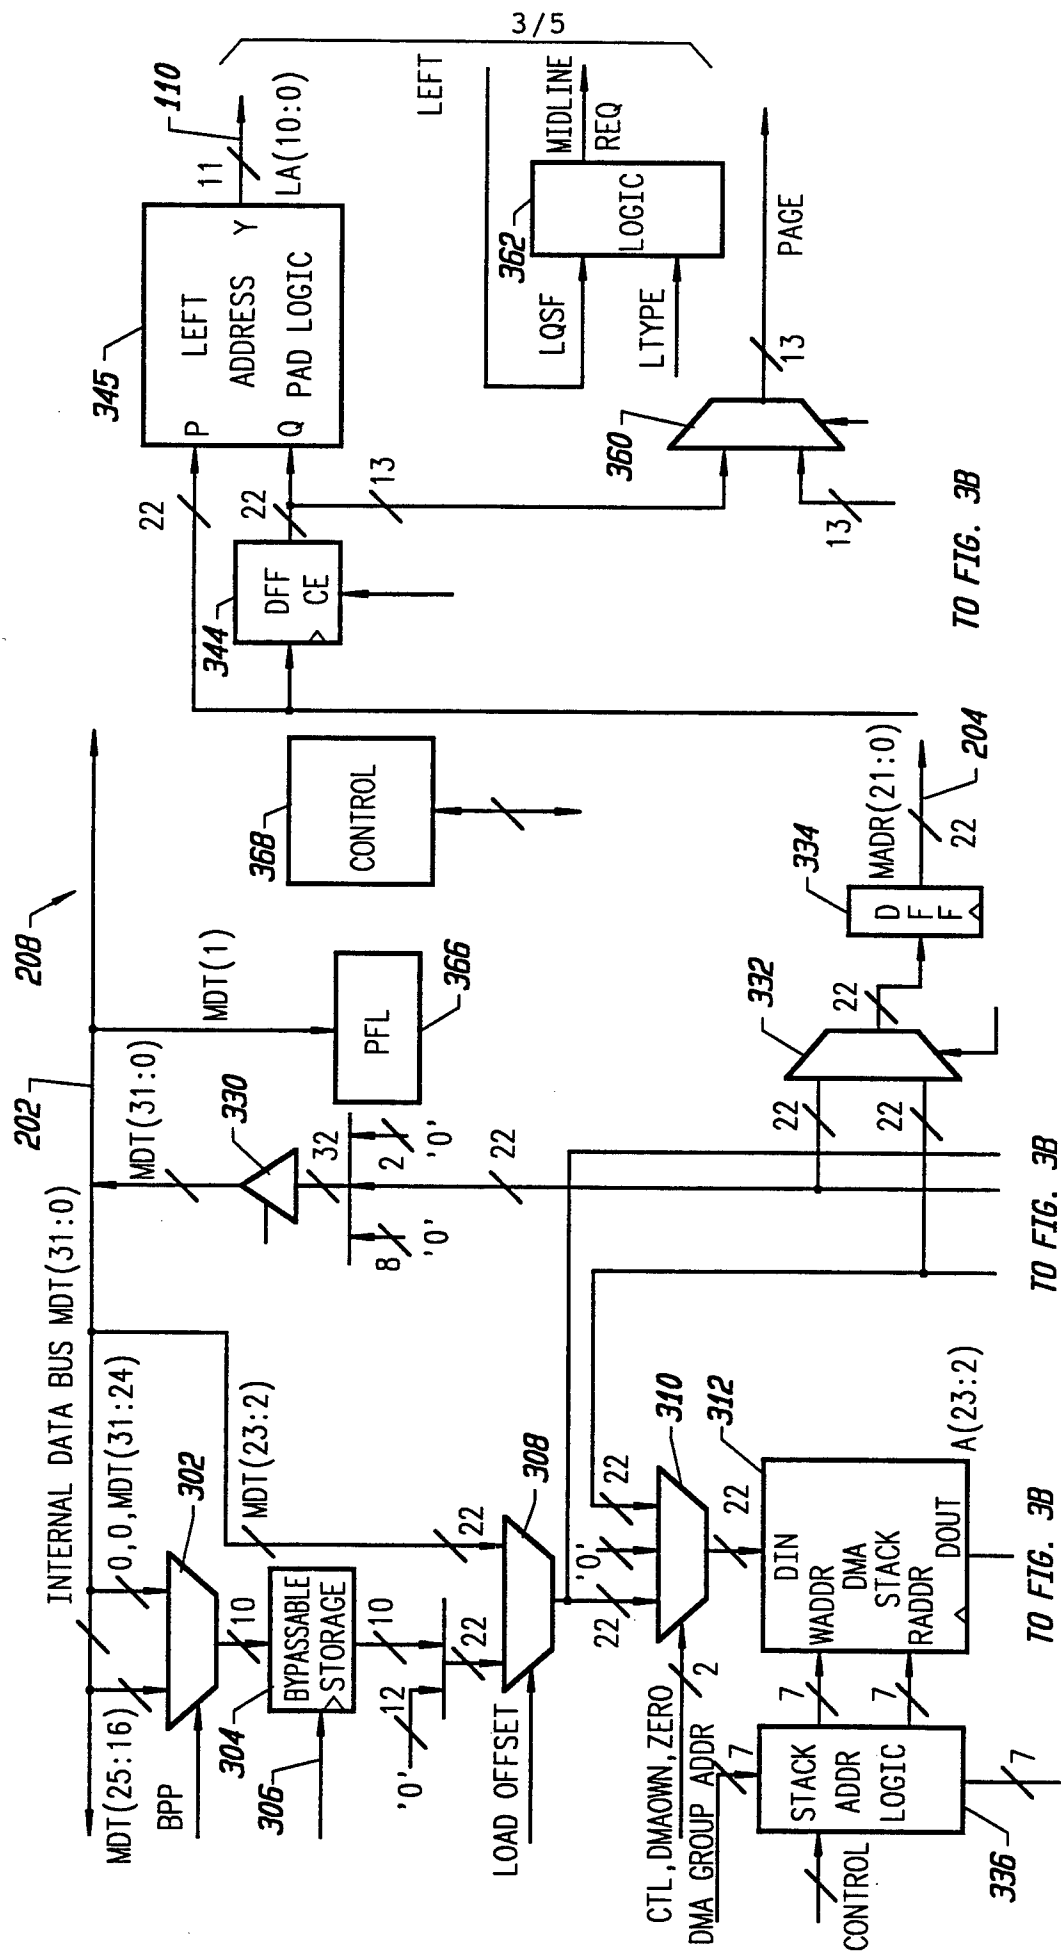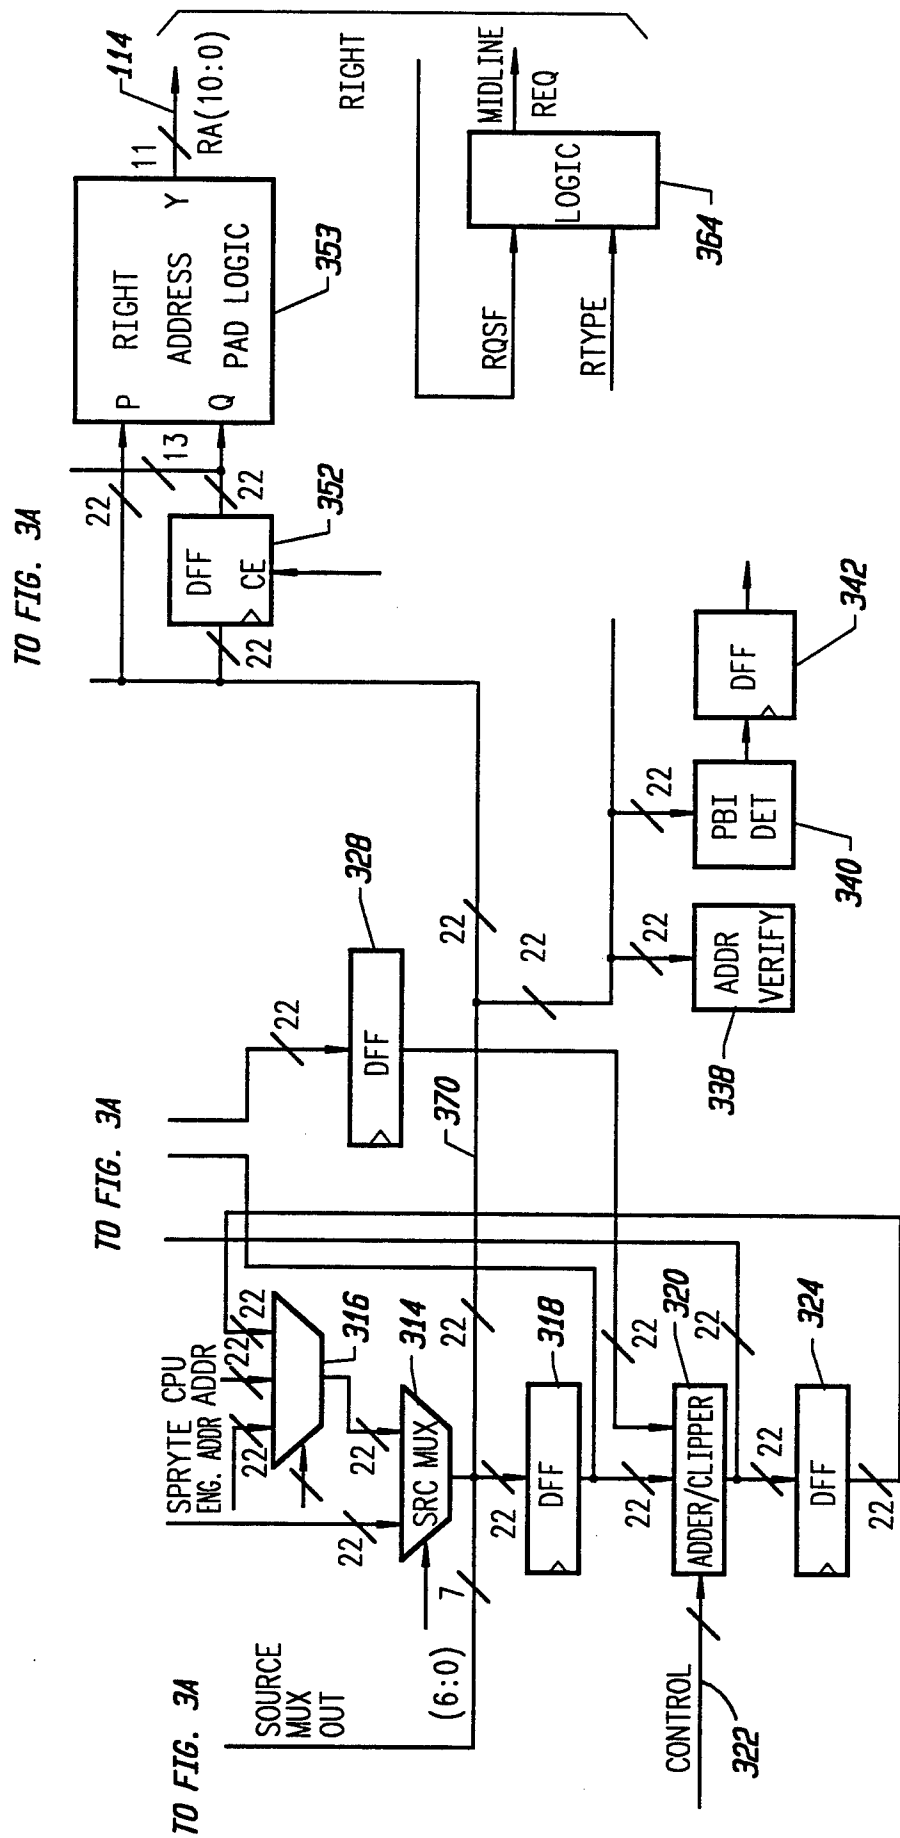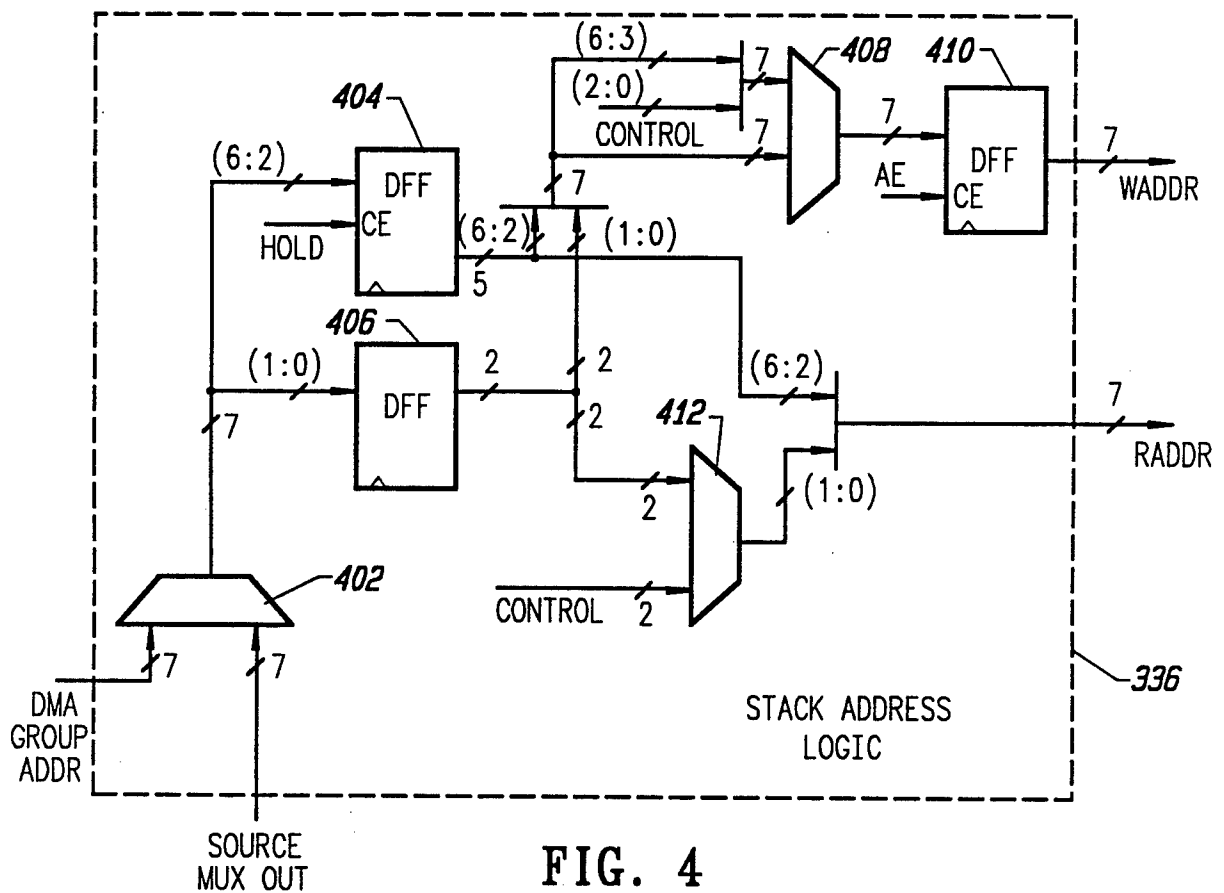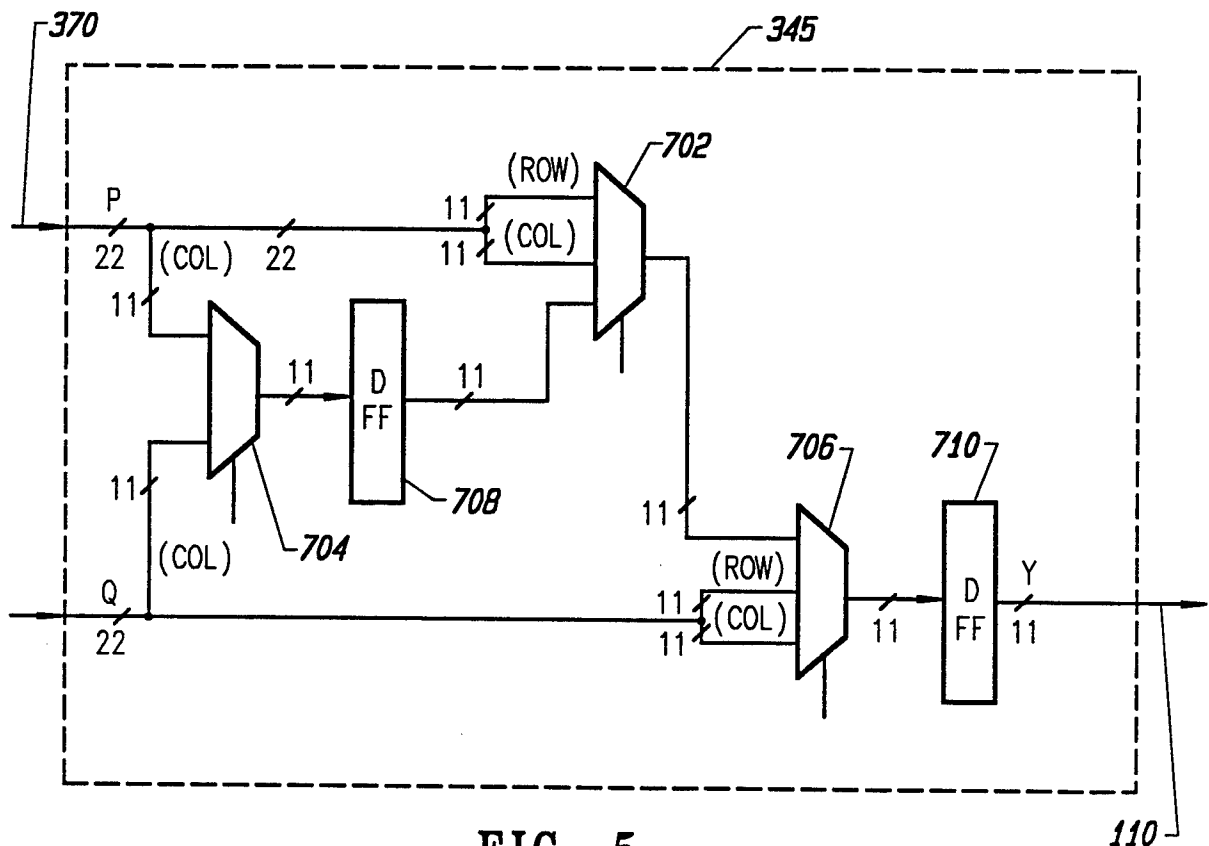

FIG. 3B

FIG. 4

FIG. 5

INTERNATIONAL SEARCH REPORT

PCT/US92/09350

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :G06F 15/62
US CL :395/152; 340/725

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 395/154, 162, 164, 165, 166, 131; 340/750, 724

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,653,013 (Collins et al) 24 March 1987, See the entire document.	1-21
A	US, A, 4,905,168 (McCarthy et al) 27 February 1990, See the entire document.	1-21
Y	US, A, 4,951,229 (Dinicola et al) 21 August 1990, See column 4-6.	1-21
Y	US, A, 4,951,038 (Yamamura) 21 August 1990, See figure 2B and column 2-4.	1-21
A	US, A, 4,952,051 (Lovell et al) 28 August 1990, See the entire document.	1-21

☐ Further documents are listed in the continuation of Box C.　　☐ See patent family annex.

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be part of particular relevance		
"E"	earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
24 JANUARY 1993	**11 FEB 1993**

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer
	HEATHER HERNDON　NGUYEN NGOC-BO INTERNATIONAL DIVISION
Facsimile No. NOT APPLICABLE	Telephone No. (703) 305-9793

Form PCT/ISA/210 (second sheet)(July 1992)★