

IriUniverse Two Dual Iris Scanner



IriUniverse - Two Dual Iris Scanner is a binoculars-type iris biometrics imaging device that simultaneously and quickly captures highest quality iris images. Easy to use, the system can be reliably positioned by the subject with minimal instructions.

The device captures dual iris images at high speed and produces images that meet ISO standards. Both the subject and the operator benefit from the IriUniverse Two.



Compliance to EYE
Safety Standards



Unaffected by Ambient
Lighting



Dust & Water Resistant



Compliant with ANSI
NIST & ISO Image
Interchange Format



Supports Windows,
Linux and Android



STQC Certified

KEY FEATURES

- STQC Certified Dual Iris Scanner
- Intuitive system requires no training
- Superior & High speed dual iris image capture
- Lightweight & Supports liveness detection
- Automatic iris detection and positioning
- Quick enrollment for large scale programs
- Meets and exceeds ISO 19794-6 standard

APPLICATION AREAS


- Voter registration
- ID document issuance
- Law enforcement
- Large scale ID enrollment
- e-KYC application

IriUniverse Two is a rugged, portable, and simple-to-use dual-iris capture device that can capture both irises with greater accuracy and speed. The innovative dual iris scanner is groove with features that make it suitable for a wide range of biometric enrollment and identification applications.

Scanned Result

Form1

Left Preview

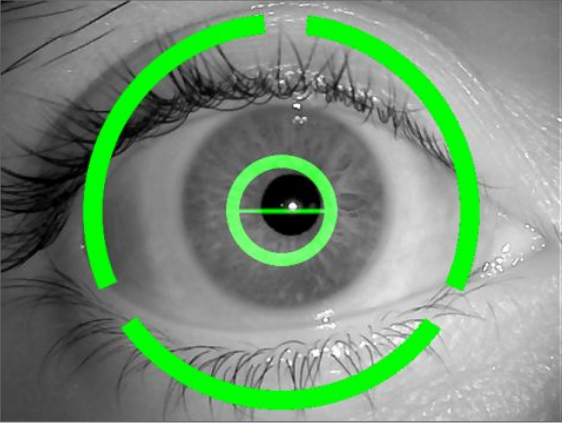

Right Preview



Image Kind Selection

☐ Image Kind K1

☒ Image Kind K3

☐ Image Kind K7

Capture Eye Selection

☒ Both Eye

☐ Left Eye

☐ Right Eye

Capture Method

☒ Time Based

☐ Best Oneshot

Extra Control


☐ Operator Mode Display

☐ Easy Capture Mode


Time Base Capture Time [mSec]

3000

Left Captureed

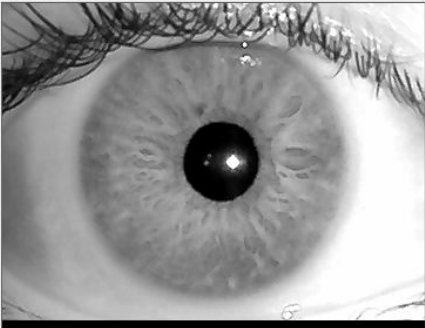

Right Captureed

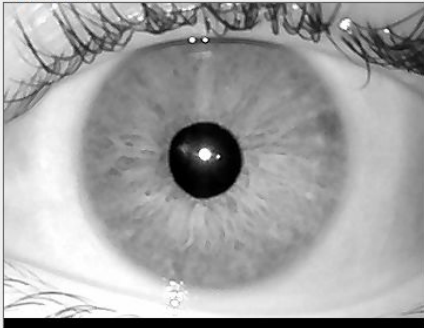

Init SDK

Reconnect

Start Capture

Stop Capture

Exit

Technical Specifications

Dimension	184.5 x 150.5 x 57.3mm
Weight	<1 Kg
Iris Image Pixel Resolution	640 x 480 pixels
Image Output	Meets or exceeds ISO 19794-6
Capture Distance (In Mm)	>=150 mm
Capture Time	<1 second
Iris Diameter (In Pixel)	>210
Spatial Resolution , Pixel Resolution	>60%@4.0 Lp/mm , >21 Pixels/mm
Number Of Simultaneous Eye Captures	2
Capture Volume (Width/Height/Depth)	> 20x15x12mm
Exposure Time	<33ms
Image Wavelength	700-900 nm
Scan Type	Progressive
Image Margins	Left & right: 0.50x iris diameter, Top & bottom: 0.25x iris diameter
Pixel Depth	>8 bits/pixel
Image Evaluation Frame Rate	>7 frames/sec, continuous image capture
Capture Mode	Auto Capture with built-in quality check
Sensor Signal Noise Ratio	>40 DB
Operating Temperature	0-49C
Durability/Shock	IP65
Humidity	10 to 90% RH, non-condensing
Interface	USB 2, USB-If Certified
Power	USB (500 mA at 5V)
Os Compatibility	Windows 7/10/11, both 32 and 64 bit versions
	Linux Ubuntu 12.04, 14.04 and 16.04 LTS
	Android 4.0 and above
Biometric Data Interchange Format	ISO 19794-6 for IRIS Image, ISO 29794-6 for image quality
Standards	FCC Class A & RoHS
Safety	Exempt Group per IEC 62471:2006-07

BioEnable Technologies Pvt. Ltd.

**BIOENABLE**
Identify - Automate - Track

sales@bioenabletech.com
support@bioenabletech.com
www.bioenabletech.com



Office No. 203, 2nd Floor, Cyber City
Tower S4, Magarpatta City,
Hadapsar, Pune 411013



Mobile: +91 9075010016
+91 8600102062
Support: +91 9850830066