






BATTERY CHARGER
NEEDS PROG R VALUE

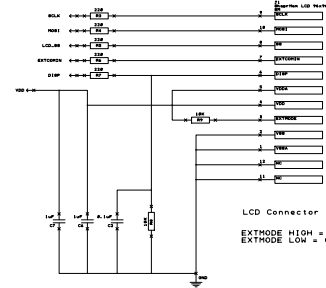




USE TO FEEL BATTERY LEVEL



LCD Connector
EXTMODE HIGH = COM INVERSION VIA EXTCOMIN
EXTMODE LOW = COM INVERSION VIA SPI



Micro USB B Connector

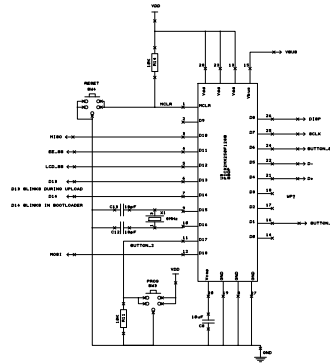

E	D	C	B	A	Drawn	Check	Projection	Di Not Scale	
Drn	Drn	Drn	Drn	Drn	Drn	Drn	Drn	Drn	Drn
Chk	Chk	Chk	Chk	Chk	Chk	Chk	Chk	Chk	Chk
Filename							Drawing No.		
Title							Sheet		