


Mould Incubator

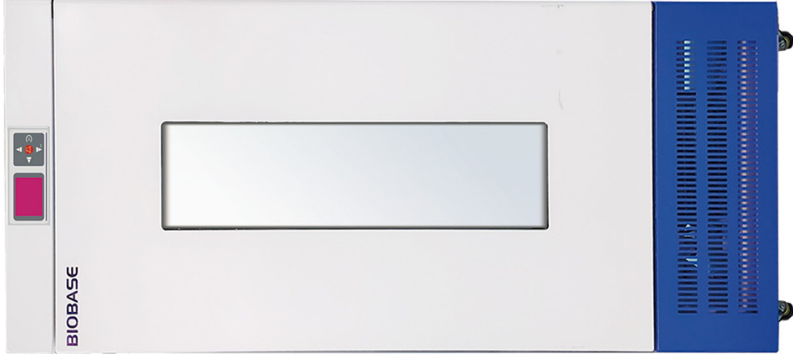

Application:

This series of products are widely used in medical and health, epidemic prevention and inspection, biopharmaceuticals, animal husbandry research, environmental protection, agricultural scientific research and other fields.

Features:

- * LCD display.
- * The refrigeration adopts a new fluorine-free design to ensure green and environmental protection.
- * With parameter memory function, the call will automatically resume operation.
- * The inner box is designed with a circular arc structure, which is easy to clean.
- * Pullable movable shelves with adjustable spacing.
- * The inner box is equipped with a fan to form a micro air circulation to improve the temperature uniformity in the box.
- * Outer box material: cold-rolled steel plate sprayed on the surface; internal material: SUS304 stainless steel plate.

Technical Parameters:

Model	BJPX-M80BI	BJPX-M100BI	BJPX-M150BI	BJPX-M200BI	BJPX-M250BI	BJPX-M300BI	BJPX-M400BI
Capacity	80	100	150	200	250	300	400
Temp.Control Range	0℃~ 65℃(Microcomputer PID control)						
Temp.Uniformity	±2℃						
Temp.Fluctuation	±1℃						
Temperature and Humidity Display	0.1℃						
Accuracy							
Humidification Method	Built-in humidification pan for natural evaporation.						
Timing Range	0~9999min (h)						
Power Consumption	1000W		1200W		1400W		
Refrigerant	R134a						
Power	AC220V, 50/60Hz (Standard) ; AC110V, 60Hz (Optional)						
External Size(W*D*H)	540*580*1110mm	540*580*1220mm	590*630*1380mm	590*660*1530mm	620*700*1600mm	660*700*1700mm	720*760*1800mm
Internal Size(W*D*H)	400*370*560mm	400*370*680mm	450*420*850mm	450*450*1000mm	480*490*1070mm	520*500*1170mm	580*540*1270mm
Package Size(W*D*H)	670*710*1280mm	670*710*1400mm	720*760*1560mm	720*790*1710mm	750*830*1780mm	790*830*1880mm	850*880*1980mm
Net/Gross Weight	65/85kg	70/90kg	90/120kg	95/138kg	105/145kg	115/157kg	135/170kg

* Notice:It cannot be used for long-term refrigeration and storage.