


Vertical Autoclave

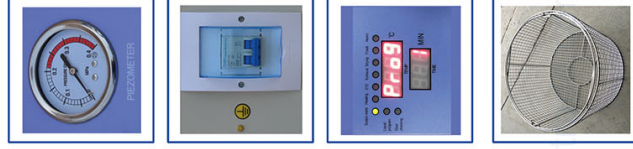

Application Range:

There are 5 fixed programs and 2 DIY programs according to different sterilization objects such as dressings, equipment, tools, rubber, liquid, culture medium, waste, etc.

Safety Features:

- * Over pressure: safety valve can automatically open to release pressure.
- * Over temperature: the system will power off automatically.
- * Door sensor: Sensor at door closing position, to check the door status. If door is open, operation will stop.
- * Anti-dry out function: If water level is too low, system will power off and error code displays on screen.
- * Over current: over voltage or electric leakage protection apparatus-air switch.
- * Door cover: The door is covered with safety shell made of thermal insulation material, which can protect operator from burning by heat and looks nice.

Technical Features:

- * Water inlet filter to keep high water quality (except BKQ-B150/200II).
- * Optional printer for recording sterilization data.
- * LED screen displays all steps of full process as well as error codes.
- * Independent quick service window, easy for repairing and maintenance.
- * Automatic selecting quick or low exhaust to avoid sterilization liquid overflowing.
- * Sterilization programs for dressings, equipment, rubber, culture medium, waste, etc.
- * Hand wheel type of quick-open door structure, self-expandable sealing ring, easy operating and safe.
- * Complete process of filling water, dynamic pulse exhaust, heating, sterilizing and draining runs automatically.
- * Adopting certain temperature (98~102℃) exhaust method and dynamic pulse exhaust method to completely empty the cold air inside chamber for ensuring steam saturability.
- * Inner stainless steel water tank for water and steam to circulate inside. Steam does not exhaust during sterilization, so as to keep the outside clean and dry (except BKQ-B150/200II).
- * Drying function (except BKQ-B150/200II).
- * Optional stainless steel bucket (except BKQ-B150/200II).
- * Standard 1 pcs stainless steel tray(except BKQ-B150/200II).

Technical Parameters:

Model	BKQ-B50II	BKQ-B75II	BKQ-B100II	BKQ-B120II	BKQ-B150(II)	BKQ-B200(II)
Capacity	50L	75L	100L	120L	150L	200L
Chamber Size(mm)	φ386*514	φ386*695	φ386*875	φ386*1055	φ500*760	φ500*1000
Chamber Material	SUS304					
Designed Pressure	0.28Mpa	0.217Mpa				
Designed Temp	134℃	138℃				
Working Pressure	0.23MPa	0.217MPa				
Working Temp.	105~136℃	50~134℃				
Temp. Display Accuracy	±0.1℃					
Timing Range	0~999min	0~99h				
Dynamic Pulse Exhaust Times	0~9 times	/				
Dynamic Pulse Exhaust Temp.	105~136℃					
Temp. Holding Range	45~60℃ (programmable)					
Consumption	4.4KW	4.7KW	5.2KW	5.2KW	6KW	
Power Supply	AC110/220V±10%, 50/60Hz					
Standard SS Basket	1 pcs	2 pcs	2 pcs	3 pcs	3 pcs	4 pcs
External Size(W*D*H)mm	640*550*970	640*550*1080	640*550*1280	640*550*1380	650*650*1400	650*650*1700
Package Size(W*D*H)mm	750*745*1100	750*745*1240	750*745*1450	750*745*1540	800*760*1530	800*760*1720
Gross Weight(kg)	102	112	125	140	213	238

Note: It is applicable to the altitude below 3,000m