




ሮዳስ RODAS
የቀለም ኢንዱስትሪ Paint Industry



ሰ-ፐር ደብል 'ቲ' ጀነራል ትሬዲንግ
ኃ/የተ/የግ/ማህበር
**Super Double 'T' General Trading
P.L.C**



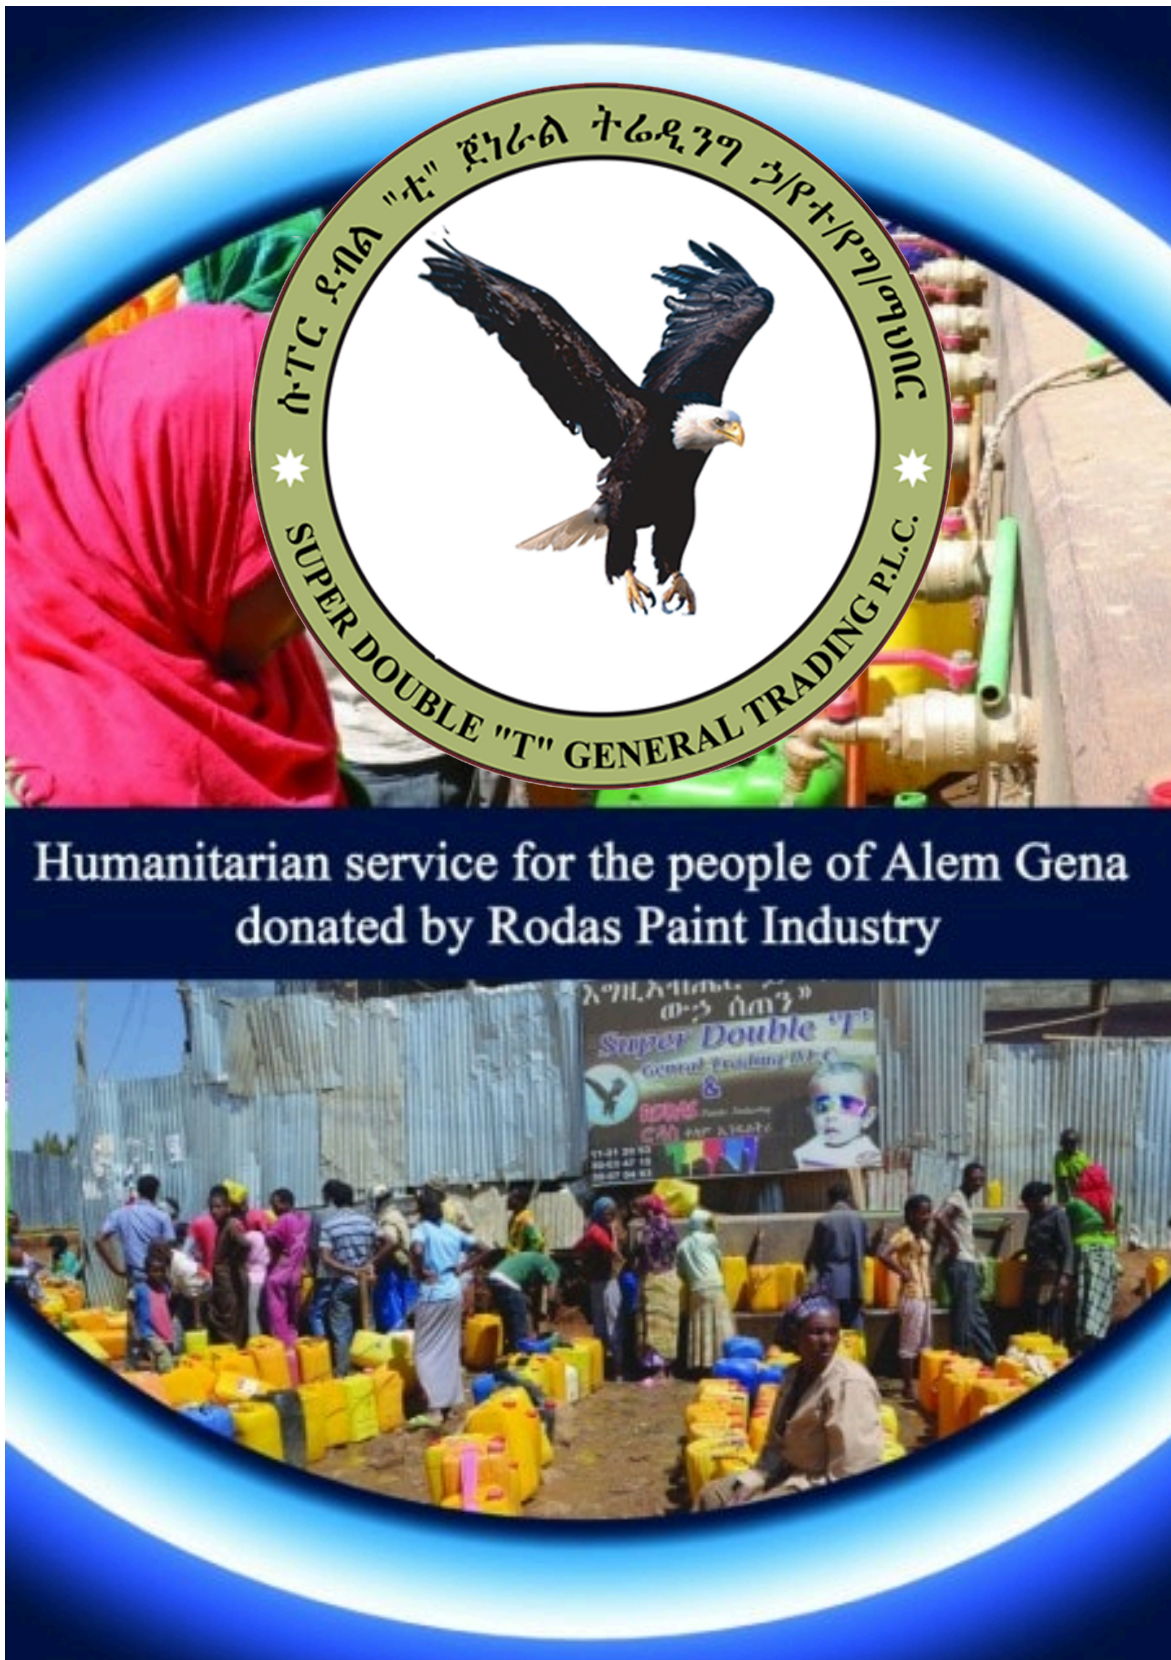



...ed as private Limited
 ...ing company there are
 ...several ... company engaged in different
 ... business ac ... import, contracting whole sales and
 ... retail sales.


Super Fiber Glass Products manufacturing, Rodas Paint Industry, Super
 water proofing works, Super solar energy technology, Super Rubber Seal
 Factory and Pomy Marble Factory are the main sectors under Super Double
 "T" General Trading plc.

The diversification of our products, manufacturing of marketable products,
 whole sale and distribution of imported items is based on the detail market
 research and experience on the business. The company increases its
 performance from time to time by additional advantages of incorporating
 human resources, market assessments, and capability of selecting niche
 markets.

Our major asset is the human resource of the company, inspiration, unstinted
 efforts backed up with extensive experiences acquired in various sectors of the
 business world, which therefore makes out to be the invaluable resource of the
 organization. Super Double T General Trading PLC makes sure that all the
 members of the company managements are always dedicated to contribute their
 own knowledge for the growth of the company, through applying their vast
 experience in private business organizations, government organizations, public
 enterprise, non government organizations including international organizations
 at different capacities and managerial levels.





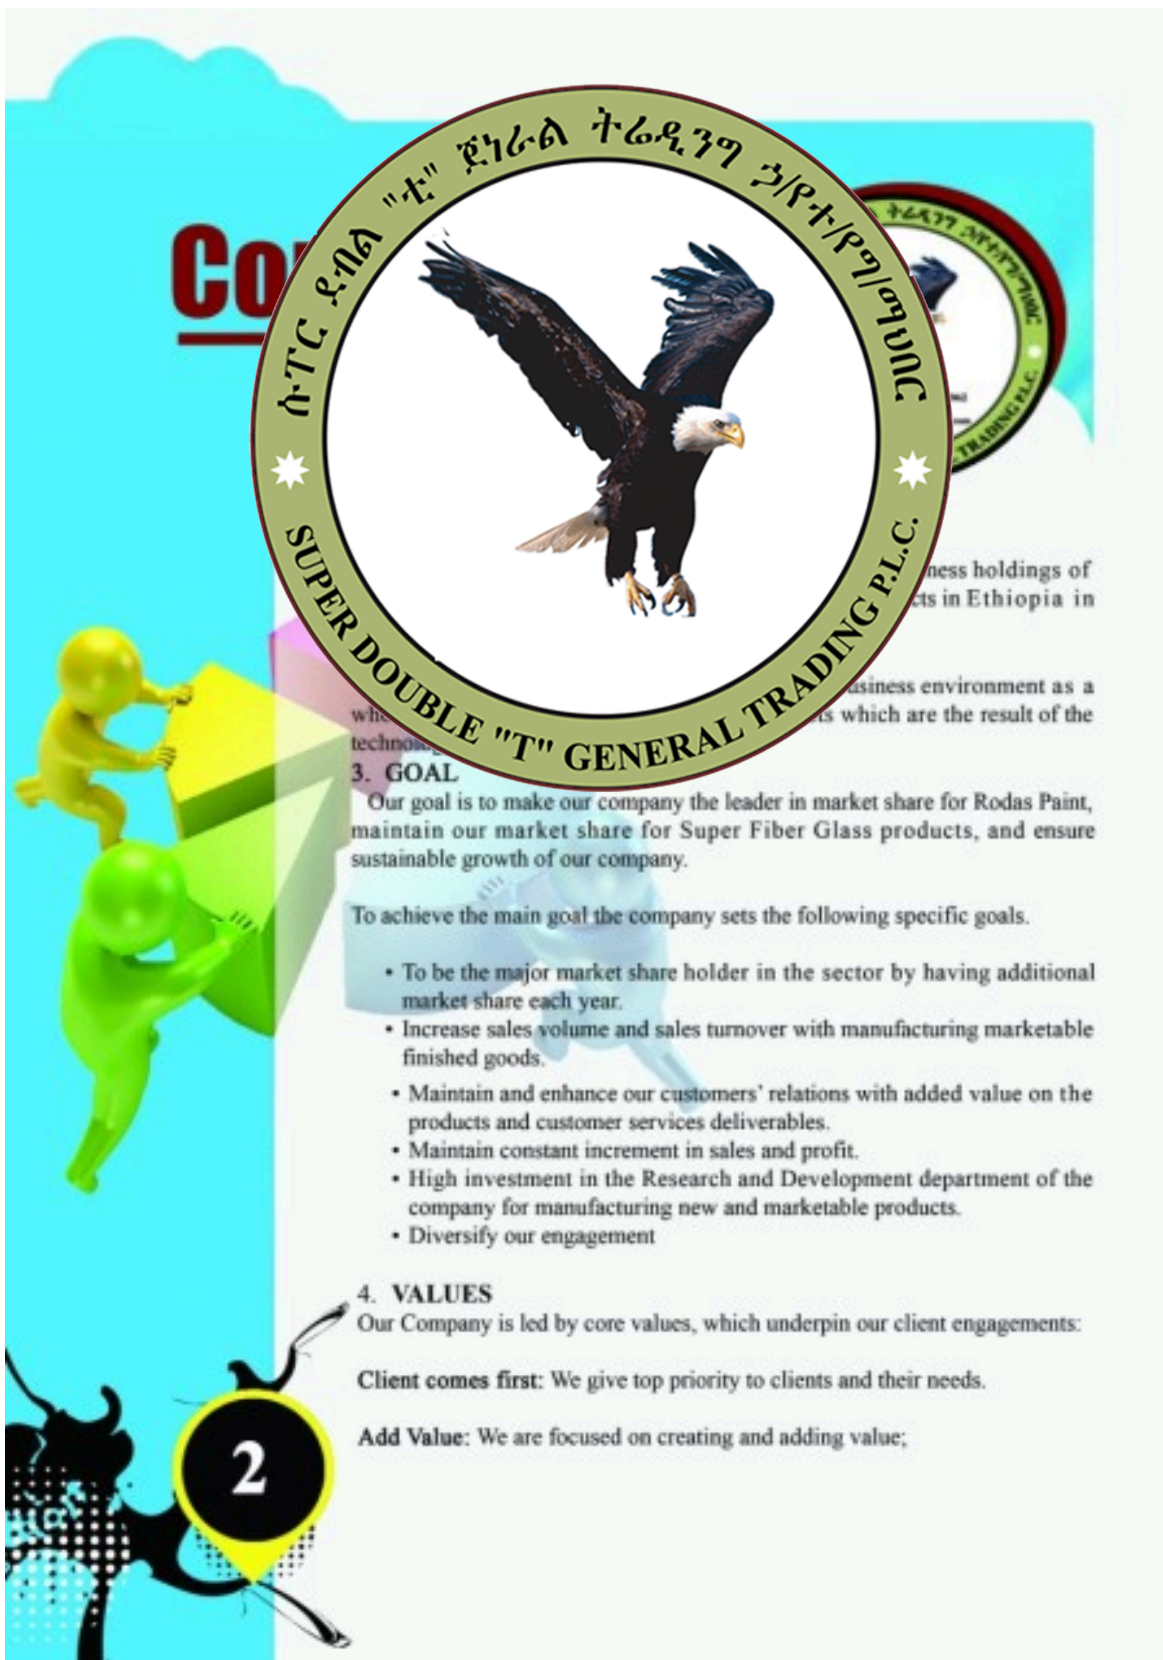

ሱፐር ደብል "ፒ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

business holdings of
products in Ethiopia in

business environment as a
which are the result of the

3. **GOAL**

Our goal is to make our company the leader in market share for Rodas Paint, maintain our market share for Super Fiber Glass products, and ensure sustainable growth of our company.

To achieve the main goal the company sets the following specific goals.

- To be the major market share holder in the sector by having additional market share each year.
- Increase sales volume and sales turnover with manufacturing marketable finished goods.
- Maintain and enhance our customers' relations with added value on the products and customer services deliverables.
- Maintain constant increment in sales and profit.
- High investment in the Research and Development department of the company for manufacturing new and marketable products.
- Diversify our engagement

4. **VALUES**

Our Company is led by core values, which underpin our client engagements:

Client comes first: We give top priority to clients and their needs.

Add Value: We are focused on creating and adding value;

2





ሱፐር ደብል "ቲ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር
SUPER DOUBLE "T" GENERAL TRADING P.L.C.

of Super Double T
 ment team educational
 got, their rich experiences
 business,

The Difference

We differentiate ourselves through:

- * Our senior level principals who have extensive business experience;
- * We work closely with our clients, collecting feedbacks as well as readiness for action;
- * We execute assignments both big and small; we flex our capacity to suit our clients' and market needs;

7. PRODUCTS AND SERVICES OF THE COMPANY

These are the different sectors under Super Double T General Trading Plc

- * Super Fiber Glass Products Industry
- * Rodas Paint Industry;
- * Pomy Marble Factory
- * Super Water Proofing
- * Super Solar Energy
- * Rubber seal Factory

4





Pr

ሰፊ ጽብል "ፒ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

products which meet and
 exceed our consistent quality standards
 our raw materials are sourced from reliable manufacturers under long-term
 contract. Super Double "T" products are delivered directly to your storage
 site with out bearing on customers any additional costs. Customers
 receive detailed installation instructions and handling suggestions,
 allowing you to easily offload and erect your new fiberglass Products.

We are proud to be known as one of the leading manufacturers and suppliers
 of fiberglass products in Ethiopia. As our quality policy, ensuring a safe and
 harmony working environment for all of our employees has always been, and
 will always be, a major priority. This promise is highlighted through the
 tenure of the majority of employees at SUPER FIBER. Our team works hard
 to guarantee all products manufactured and produced bearing the SUPER
 FIBER name 100%. Our team is our greatest resource.

We are backed by efficient team of dedicated, experienced and creative
 individuals. They are involved completely from initial stages to the final stage
 of delivery of service and product. Their creativity, awareness and experience
 in customizing the service or product leaves our esteemed clients gasp in awe.

Under the motivational leadership of our founder, our team always stayed up in
 the learning curve. Therefore, we are providing the latest and emerging interior
 designing services and job work needs of the industry. Our team includes:

- Designers
- Marketing executives
- Skilled workers

Every team member works relentlessly to improvise each
 day and become better and better.

6

ሱፐር ደብል "ፒ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

reinforcements
forcements and
anical properties
e required, unlike

es are strong, lightweight,
onductive, RF transparent, and
unique properties of Fiberglass that make
them suitable and desirable for a wide range of product applications.

Fiber glass a Advantages include:

- Strength & Durability
- Versatility
- Affordability and Cost Effectiveness
- Unique Physical Properties

Fiberglass is an attractive, lightweight, and durable material with one of the highest strength to weight ratios available for component fabrication. It is also highly resistant to environmental extremes. Fiberglass does not rust, are highly resistant to corrosives, and are able to withstand temperature extremes as low as -80°F for as high as 200°F.

Fiberglass can be tooled, molded, and fabricated into almost any shape or design. There are few restrictions on color, finish, shape, or size. In addition to its versatility, FRP products are very affordable and cost effective solutions for almost any application, component, or part. Once molds have been created, parts can be easily duplicated at extremely cost effective way.

Fiberglass products are chemically inert, thus will not react chemically with other substances. Fiberglass products are also structurally stable and exhibit the least amount of expansion and contraction with temperature fluctuations as compared to traditional materials.

7



ሱፐር ደብል "ቲ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

...iles, bath tubs,
...tubs, septic tanks,
...and external door skins.


...to 30,000 Lts.)

- Showers (and size)
- Kitchen Sink
- Transparent and Translucent roof sheets
- Flower Pots
- Dustbin, Garbage Bin
- Jacuzzi (Non Electrical)
- Car Parking Sheds
- Pick-up hard tops
- Children swings
- Partition
- Spare Wheel Cover
- Molds for Gypsum boards
- Motorcycle Delivery Box
- Boats
- Dolls

Why we Choose SUPER FIBERGLASS products:

- Strong and long-lasting: fiberglass is stronger than sheet metal.
- Easily Maintained
- Design Freedom: There are very few restrictions with molding fiberglass, giving the engineer unlimited possibilities.
- Cost Effectiveness
- Special Characteristics: Fiberglass is non-conductive and radio frequency transparent.

8

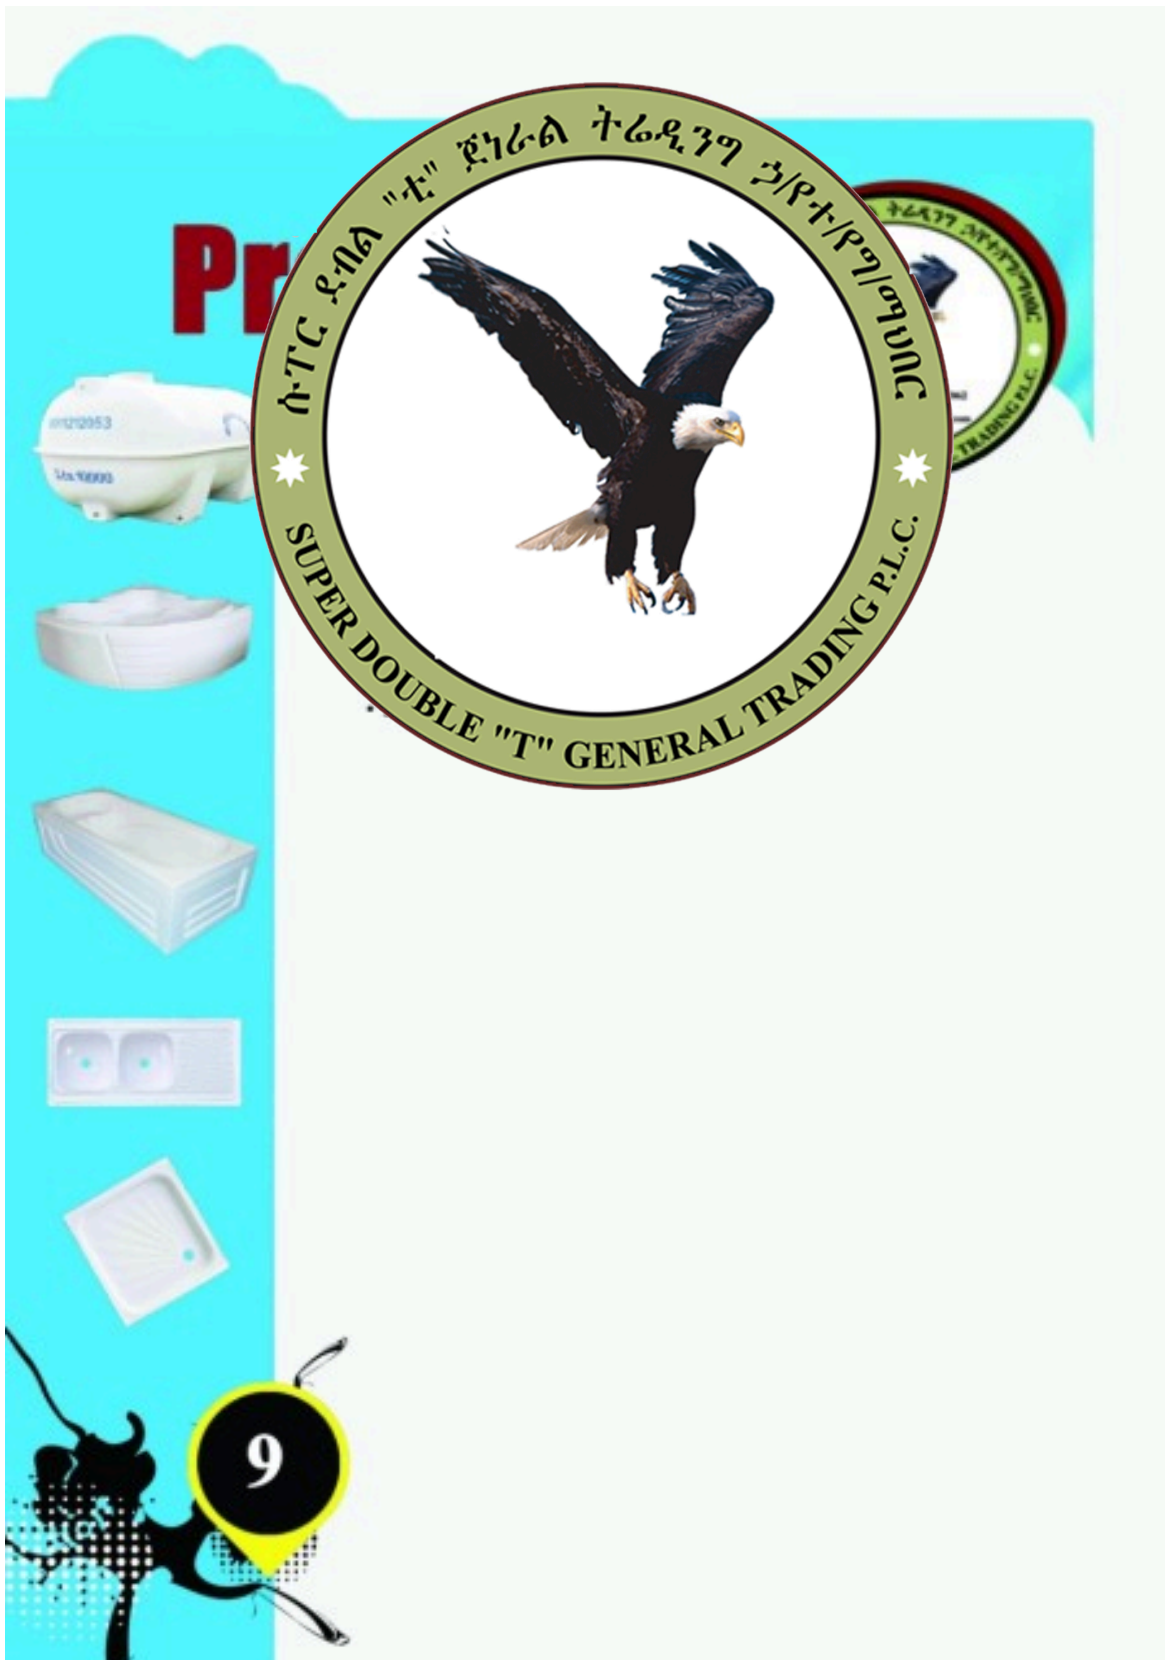

































































































































ከፕሮ ደብል "ቲ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

Corrugated Sheets (Fiber Reinforced Plastic)

We are trusted by clients for the manufacturing of FRP Corrugated Sheets that are available in a variety of designs and profiles. For the satisfaction of clients, we also provide onsite installation using advanced techniques. The length of our FRP Corrugated Sheets can be customized by the client.

- Shelters
- Multiple sizes
- Impact resistance
- Properties
- Proof
- Transmission : Up to 85%

75







Pr

ሱፐር ደብል "ቲ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

OVER

Rodas paint, a brand name under SUPER DOUBLE "T" GENERAL TRADING PLC, is an Ethiopian manufacturer of different kinds of high quality paint products which are used widely in construction works.

It is the pioneer of modern paint industry in Ethiopia with great potential in the field of producing a wide Variety of superior quality paint with the latest technology and skilled Ethiopian and foreign man power.

Rodas paint industry has a well equipped plant with the latest technology and machinery and arduous quality control laboratory to deliver undisputable quality products. It also constantly conducts exploratory research to upgrade and fabricate new products and to create market opportunity.

Rodas paint industry has expanded its capacity, developed a skilled workforce and introduces integrated technologies, to remain globally up-to-date. Today, RODAS paint is the prime choice of many Customers and it has good network of dealers and distributors all across the country, and is vying for the same internationally in the near future.

78

1. SUPER DOUBLE "T" GENERAL TRADING P.L.C.
This is a high quality paint for exterior and weather resistance.

2. RODAS SUPER WHITE EMULSION PAINT
Rodas Super White Emulsion paint is an excellent water based paint for interior use. It is particularly recommended for finishing the walls of rooms either on wood, wall putty, or gypsum surfaces. It is of good quality for general purpose and has good resistance to all weather conditions.

3. RODAS WUBET PAINT
Rodas Wubet Emulsion paint is an excellent water based paint for interior use. It has been formulated specially for interior use where cost is an issue without losing the quality of the paint.

4. RODAS POLYURETHANE VARNISH
It is high quality varnish designed for all wood surface especially where high glass finish and water resistance is required. It is a hard glaze, one pack polyurethane finish primarily internal use.

RODAS Polyurethane Varnish is suitable for flooring work, chipboard, hardboard, woodwork, furniture and all other interior timber surfaces. It preserves and enhances wood grain, resists stains caused by hot water, dilute domestic acids, alcohols and oil.

5. RODAS ANTI RUST
Rodas anti rust Paint is a metal primer that prevents metals from corrosion in milder condition. It is a chemical compounds usually applied to the undercarriage of a motor vehicle, Metal Gate, Galvanized Iron Sheet etc as under coating to protect it from Rust.

79

Pro

It is a clear... protection of wood surfaces such as, windows, doors, furniture, etc. It also enhances natural appearance of the wood and will make the surface easy to clean.

7. RODAS wood glue
It is an adhesive used for all types of planned and unplanned wood, plywood, hardwoods, softwoods, wood panels as well as veneer, particle board, and hard board. These adhesives are suitable for wood-to-wood bonding, as well as for the bonding of wood to other substrates.

8 RODAS traffic (road marking) paint.
It uses on concerts, asphalt, runways, parking lots, etc. The paint is fast drying and especially formulated with resin which has excellent abrasion, weather, and heat resistance.

9 RODAS Synthetic Enamel Paint
It is air-drying synthetic enamel for interior and exterior use. The paint can be applied on metal and wood furniture, machineries, household appliances, tools, and electrical ranges, etc
Synthetic Enamel paint has good gloss, color retention, good weather resistance and withstand heavy impact and abrasion. Alkyd resin is used as binder for Enamel paint and it contains pigments and additives

10 RODAS super gloss enamel
It is premium grade 1st quality paint manufactured from top quality pigments, alkyd medium to give good gloss and color retention, when used properly it gives maximum protection on metals, wood, plaster and bricks. It is formulated to give excellent opacity and long durability both internally and externally.

80

ሱፐር ደብል "ቲ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

RODAS Paints

RODAS QUARTZ

Rodas Quartz

81





The advertisement features three cans of Rodas Wubet Interior Wall Paint. The cans are white with green and yellow accents. The central can is prominently displayed, showing the brand name 'RODAS' and 'WUBET Interior Wall Paint'. Above the cans is a large circular logo featuring an eagle with spread wings. The logo's border contains the text 'ሱፐር ደብል "ፒ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር' and 'SUPER DOUBLE "T" GENERAL TRADING P.L.C.'. A green banner at the bottom reads 'Rodas Wubet'. A yellow circle with the number '84' is in the bottom right corner.

ሱፐር ደብል "ፒ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

RODAS Paints Industry

RODAS WUBET Interior Wall Paint

Rodas Wubet

84

The advertisement features three white buckets of Rodas Super paint. The buckets have blue labels with the text "RODAS Paints Industry" and "SUPER DOUBLE 'T' GENERAL TRADING P.L.C.". A large circular logo is overlaid on the buckets, featuring an eagle with spread wings. The logo contains the text "ሱፐር ደብል 'ተ' ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር" and "SUPER DOUBLE 'T' GENERAL TRADING P.L.C.". A green banner at the bottom reads "Rodas Super". A yellow circle with the number "85" is in the bottom right corner.



The advertisement features a central circular logo with an eagle in flight. The text around the eagle reads "ሱፐር ደብል 'ቲ' ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር" and "SUPER DOUBLE 'T' GENERAL TRADING P.L.C." Below the logo, several cans of "Rodas Alkyd Varnish" are displayed. The cans have labels with the Rodas logo and Amharic text. A green banner at the bottom reads "Rodas Alkyd Varnish". A yellow circle with the number "87" is in the bottom right corner.

The advertisement features a central circular logo with an eagle in flight. The logo's border contains the Amharic text "ሱፐር ደብል 'ቲ' ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር" and the English text "SUPER DOUBLE 'T' GENERAL TRADING P.L.C." separated by two stars. Below the logo, several cans of Rodas Anti-Rust paint are displayed. The cans are yellow and white, with labels that include the Rodas logo, the product name "Rodas Anti-Rust", and instructions in Amharic and English. A green banner at the bottom of the image reads "Rodas Anti-Rust". In the bottom left corner, there is a yellow circular badge with the number "88".

The advertisement features a large, circular logo at the top center. The logo contains a detailed illustration of an eagle with its wings spread, perched on a branch. The text around the eagle reads "ሰፐር ደብል 'ቲ' ጀነራል ትሬዲንግ ኃ/የተ/የግ/ማህበር" in Amharic and "SUPER DOUBLE 'T' GENERAL TRADING P.L.C." in English. Below the logo, there are several cans of Rodas Anti-Rust paint. The cans are white with red and blue accents. The text on the cans includes "RODAS PAINT", "Rodas Anti-Rust", and "የተለምዶ ኢንዱስትሪ Paint Industry". A green banner at the bottom of the image reads "Rodas Anti-Rust". In the bottom right corner, there is a yellow circle with the number "89".

The advertisement features a central circular logo with an eagle in flight. The logo's border contains the Amharic text "ሱፐር ደብል 'ቲ' ጀነራል ትሬዲንግ ኃ/የተ/የግ/ማህበር" and the English text "SUPER DOUBLE 'T' GENERAL TRADING P.L.C." separated by two stars. Below the logo, several cans of "Rodas Enamel" paint are displayed. The cans have labels with the Amharic text "ሮዳስ ኢናሜል" and "ሰጋተሪ የብረትና የእንጨት ቁጥጥር" (Synthetic Paint for Metal & Wood Structures). A blue ribbon seal on the cans reads "Expert Standard". A green banner at the bottom of the cans displays "Rodas Enamel" in a stylized font. In the bottom left corner, a yellow speech bubble contains the number "90". The background consists of vibrant, curved stripes in red, yellow, and blue.





OVER VIEW

POME MARBLE, a brand name under our company SUPER DOUBLE "T" GENERAL TRADING PLC, is an Ethiopian manufacturer of different kinds and sizes of high quality marble and dolomite products which are used widely in paint, tiles, soaps and detergent factories.

Pome marble factory has a well equipped plant with the latest technology and machinery to deliver undisputable quality products. It also constantly conducts exploratory research to upgrade and fabricate new products and to create market opportunity. Pome marble factory has expanded its capacity, developed a skilled workforce and introduces integrated technologies, to remain up-to-date.

WHAT IS MARBLE?

Marble is a metamorphic rock that forms when limestone is subjected to the heat and pressure of metamorphism. It is composed primarily of the mineral calcite (CaCO_3) and usually contains other minerals such as: clay minerals, micas, quartz, pyrite, iron oxides and graphite. Under the conditions of metamorphism the calcite in the limestone re crystallizes to form a rock that is a mass of interlocking calcite crystals. A related rock, dolomitic marble, is produced when dolostone is subjected to heat and pressure.

92

Pr

...is harder and
...stone, a concrete

...the host rock for large
...where calcite limestone is
...in its place as a flux for the
...processed dolomite are used in the
production of

In horticulture, dolomite and dolomitic limestone are added to soils and potting mixes to lower their acidity and as a magnesium source. Home and container gardening are common examples of this use.

Pome marble factory uses these marble and dolomite rocks to produce different types and sizes of products for different purposes

PRODUCTS

- * POME Calcium carbonate
- * POME marble products
 1. Pome mar 0.0
 2. Pome mar 0.5
 3. Pome mar 1.2
 4. Pome mar 1.8
 5. Pome mar 2.5
 6. Pome mar 3.0 and above
- * POME dolomite products
 1. Pome doli 0.0
 2. Pome doli 0.5
 3. Pome doli 1.2
 4. Pome doli 1.8
 5. Pome doli 2.5
 6. Pome doli 3.0 and above

93

Waterproofing Membrane



94



Pr

ስፕሮ ደብል "ተ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግ/ሥ/ሥ

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

"SUPER DOUBLE 'T' GENERAL TRADING P.L.C. is the only SUPER DOUBLE 'T' Waterproof Engineering entity in the country."

WHAT IS WATERPROOF?
Waterproof or water-resistant describes objects relatively unaffected by water or resisting the ingress of water under specified conditions.

WHAT IS WATERPROOFING?
Waterproofing describes making an object waterproof or water-resistant. Construction, a building or structure is waterproofed with the use of membranes and coatings to protect contents underneath or within as well as protecting structural integrity.

We import different types of waterproofing materials such as chemicals and membranes. We work on installation of interior and exterior cementitious and membrane waterproofing systems widely in;

- residential developments
- industrial developments
- commercial developments
- public developments
- extension and renovations
- hotels
- Spa resorts etc.

Super Koki Waterproof Engineering has a well equipped and modern machinery to install membrane and cementitious waterproofing systems. Hence, we offer both residential and commercial waterproofing materials that is second to none. We are the trusted providers of waterproofing that you've been looking for.

95

Pr

asphalt emulsion
bitumen component
bridges shrinkage
when exposed to

Cement
Cement waterproofing is the application of a moisture barrier to cement walls or floors. Many of these moisture barriers are created as epoxy or latex mixes that will be applied as a basement or foundation sealant. Before starting the concrete waterproofing, steps should be taken to repair and prepare the surface for waterproofing.

The first step in cement waterproofing is repairing the walls or floors to be sealed. Repairing cracks and holes in the concrete or cement will help to stop moisture from leaking through the concrete. Cracks and holes can most often be repaired with the use of mortar. Before filling the cracks and holes with mortar, the damaged concrete or cement may need to be removed from the area surrounding the point of damage. Additional work may be needed before starting the cement waterproofing if there is a steady leak through the damaged section. In order to repair this section of the wall, a leak pipe may need to be placed in the hole with mortar surrounding the hole. If the leak reduces to a small trickle, the pipe may be removed at the discretion of the person repairing the cement. If there is a steady stream of water leaking from the pipe, a drainage system may need to be established for the water.

What we do
Our services range from remedial rectifications and repairs to brand new builds, we are able to install membrane and cementitious waterproofing systems and impart technical knowledge throughout the project. For new building we can assist from the design stage by specifying the best long term solution, providing datasheet and safety information for architectural use. For remedial works, we have the experience and up to date knowledge to suggest a solution for all internal and external waterproofing issues.

96

97







DATASHEET

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

BITUSHAPE - P can be applied in:

- Single layer roofing system for normal use.
- Double layer roofing system combined with BITUSHAPE - G fiberglass reinforced.
- Waterproofing of toilets & wet area inside buildings.
- Slab on grade.

BITUSHAPE - P with Mineral Stated Finish is recommended for exposed roofing system (Unprotected) for non-accessible roofs or roofs subject to low traffic conditions.

Advantages

BITUSHAPE - P has been designed with special regard to providing clients with an excellent and versatile product line.

Advantages of BITUSHAPE - P include:

- Easy to apply (by torch).
- High mechanical properties.
- Absolute impermeability to water pressure.
- Flexibility at low temperature up to -20°.
- Excellent high temperature performance.
- Excellent adhesion on any surface.
- High dimensional stability.
- Environmentally friendly.

The information given in this data sheet is based on both current development work and many years of field experience. Whilst every effort is made to ensure that the information is reliable, we cannot accept responsibility for any work carried out with our materials as we have no control over methods of application, site, conditions etc.

ALMUTATHAWIE
SOLUTIONS
At Marafiq's Insulation Materials Industries L.L.C.
T: + 971 6 534 5385 | F: + 971 6 534 7717 | P.O. Box: 22794, Sharjah, U.A.E.
E: info@almuthawie.com | W: www.almuthawie.com

100





English		Amharic	
Dimensions	1.20m x 1.20m	ወርቅ	1.20m x 1.20m
Water absorption	EN 12596	ውሃ ጥምረት	≤ 0.1%
Static puncture resistance	EN 12596	ስታቲክ ንቅጥታ ጥንቃቄ	≥ 100N
Dynamic puncture resistance	EN 12596	ዲናሚክ ንቅጥታ ጥንቃቄ	≥ 100N
Water impermeability at 120°C	EN 12596	ውሃ ጥንቃቄ በ 120°C	≤ 0.1%
Resistance to water vapor	EN 12596	ውሃ ቨላፖር ጥንቃቄ	≤ 0.1%
Ageing due to U.V. radiation	EN 12596	ዓይነት ምሽት ምሽት	≤ 0.1%
Resistance to thermal ageing	EN 12596	ፍጥነት ምሽት ምሽት	≤ 0.1%
Adhesion to concrete	EN 12596	ጥንቃቄ ለኮንክሪት	≥ 1.0MPa
Thermal conductivity	ASTM C-577	ፍጥነት ምሽት ምሽት	0.12
Thermal resistance (k)	ASTM C-577	ፍጥነት ምሽት ምሽት	0.12
Thermal resistance (k)	ASTM C-577	ፍጥነት ምሽት ምሽት	0.12
Average density loss for Mineral	ASTM D-4877	ፍጥነት ምሽት ምሽት	Less than 20%

NOTES:

- Above results are based on 4mm membrane.
- Tolerance within 20% of the above results for mechanical characteristics complies with the tolerance specification of (ASTM D51).

Storage:

- BTUSHAPE membranes should be stored vertically in well covered and ventilated place not subject to direct sunlight.

APPLICATION INSTRUCTIONS:

- BTUSHAPE membranes are installed by proper torch welding method, loose laid or fully bonded to the substrate depending on system requirements.
- While unrolling from truck the rolls shall be by no means allowed to fall or be thrown down from the truck.
- To avoid applying the membrane to corners with 90° angle, sand cement cast chip felt can be executed at horizontal - vertical intersections.
- Surface to be waterproofed should be clean, dry, free from dust and smooth, in case of irregular surface a sand cement screed is recommended.
- Before laying BTUSHAPE membranes, surface should be primed with cold applied bituminous primer (Adhagripin Solvent or Adhagripin Emulsion).
- Membrane is unrolled and placed in aligned position.
- Each roll should overlap the next by 150mm side laps and 150mm staggered end laps.
- Then, membrane should be re-rolled about half of its length without changing its orientation.
- Using a propane gas torch the membrane is unrolled again slowly while applying the flame to the entire exposed lower face (for fully bonded systems) - until the plastic cover film turns off and the bituminous mass starts melting, thus creating a heat seal between the membrane and the substrate.
- Then, torching of the seams takes place by heating the carried line at side and end laps by torch from above, pressing the upper membrane on to the lower one using a brush. The brush has to be carefully used avoiding to keep the flame on the same point for too long.
- For sloping roofs start laying the membrane from the lower edge with longitudinal direction of rolls perpendicular to slope direction; side lap of roll not to be placed above the first one, etc.

The information given in this data sheet is based on both current development work and many years of field experience. Whilst every effort is made to ensure that the information is reliable, we cannot accept responsibility for any work carried out with our materials as we have no control over methods of application, site, conditions etc.


AL MU TATHAWIE
 A. Marshawan Insulation Materials Industries LLC
 P.O. Box 22704, Sharjah, U.A.E.
 Tel: + 971 6 534 5345 | Fax: + 971 6 534 7717 | Email: info@amti.com | Web: www.amti.com

DATASHEET

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

BITUSHAPE - P can be applied in:

- Single layer roofing system for normal use.
- Double layer roofing system combined with BITUSHAPE - G fiberglass reinforced.
- Waterproofing of toilets & wet area inside buildings.
- Slab on grade.

BITUSHAPE - P with Mineral Stated Finish is recommended for exposed roofing system (Unprotected) for non-accessible roofs or roofs subject to low traffic conditions.

Advantages

BITUSHAPE - P has been designed with special regard to providing clients with an excellent and versatile product line.

Advantages of BITUSHAPE - P include:

- Easy to apply (by torch).
- High mechanical properties.
- Absolute impermeability to water pressure.
- Flexibility at low temperature up to -20°.
- Excellent high temperature performance.
- Excellent adhesion on any surface.
- High dimensional stability.
- Environmentally friendly.

The information given in this data sheet is based on both current development work and many years of field experience. Whilst every effort is made to ensure that the information is reliable, we cannot accept responsibility for any work carried out with our materials as we have no control over methods of application, site, conditions etc.

ALMUTATHAWIE
SOLUTIONS
At Marafiq's Insulation Materials Industries L.L.C.
T: + 971 6 534 5385 | F: + 971 6 534 7717 | P.O. Box: 22794, Sharjah, U.A.E.
E: info@almuthawie.com | W: www.almuthawie.com

102





Seasoned coating. The highly resistant to for the DIY market

of foundations, building facade. Repair and

removal of shutter

Typical product characteristics:

Appearance	Flexible protective
pH	
Sp. Gr.	
Viscosity (Brookfield) 30 °C	
Cure time	: 24 to 48 hours depending upon temp. & Humidity.
Heat test (105 °C) (ASTM D 36-84)	: No sag, flow or blistering.
Elongation (ASTM D 412)	: 200% (approx.)

The drying time depends on the type of substrate, temperature, humidity and thickness of layer, etc.

Surface Preparation :

Surface should be sound, clean and free of dust, oil or grease and curing compound. Loosely adhering particles such as rust scale, cement particles etc should be removed with wire brush or other suitable means.

Application :

FLEXKOTE can be applied by brush, squeegee or roller. Hot, dry or highly porous surfaces should be dampened with clean water prior to application of FLEXKOTE. For proper protection usually two coats are recommended. Apply second coat at right angle to the first one, when the first coat is completely dry. When screed or render is to be applied onto the coating the final coat should be sprayed with sharp clean sand and allowed to dry. Brush off excessive sand before application of screed or render. FLEXKOTE also acts as a non-degradable curing membrane; hence it can be applied immediately after the removal of mould, to the concrete structures, which has no aesthetic value such as the sub-structure of the building.

Coverage :


* Damp proofing/ vapor barrier	0.4 kg/m ² /coat- 2 coats recommended
* Waterproofing membrane	1.0 kg/m ² /coat- 2 coats recommended

Packing
200 kg drum, 14 Kg Pail

Storage/Shelf life
Keep away from direct sunlight and store under normal warehouse conditions. The shelf life of this product is 12 months from the date of manufacturing provided the materials is stored in unopened factory packed drums.

106



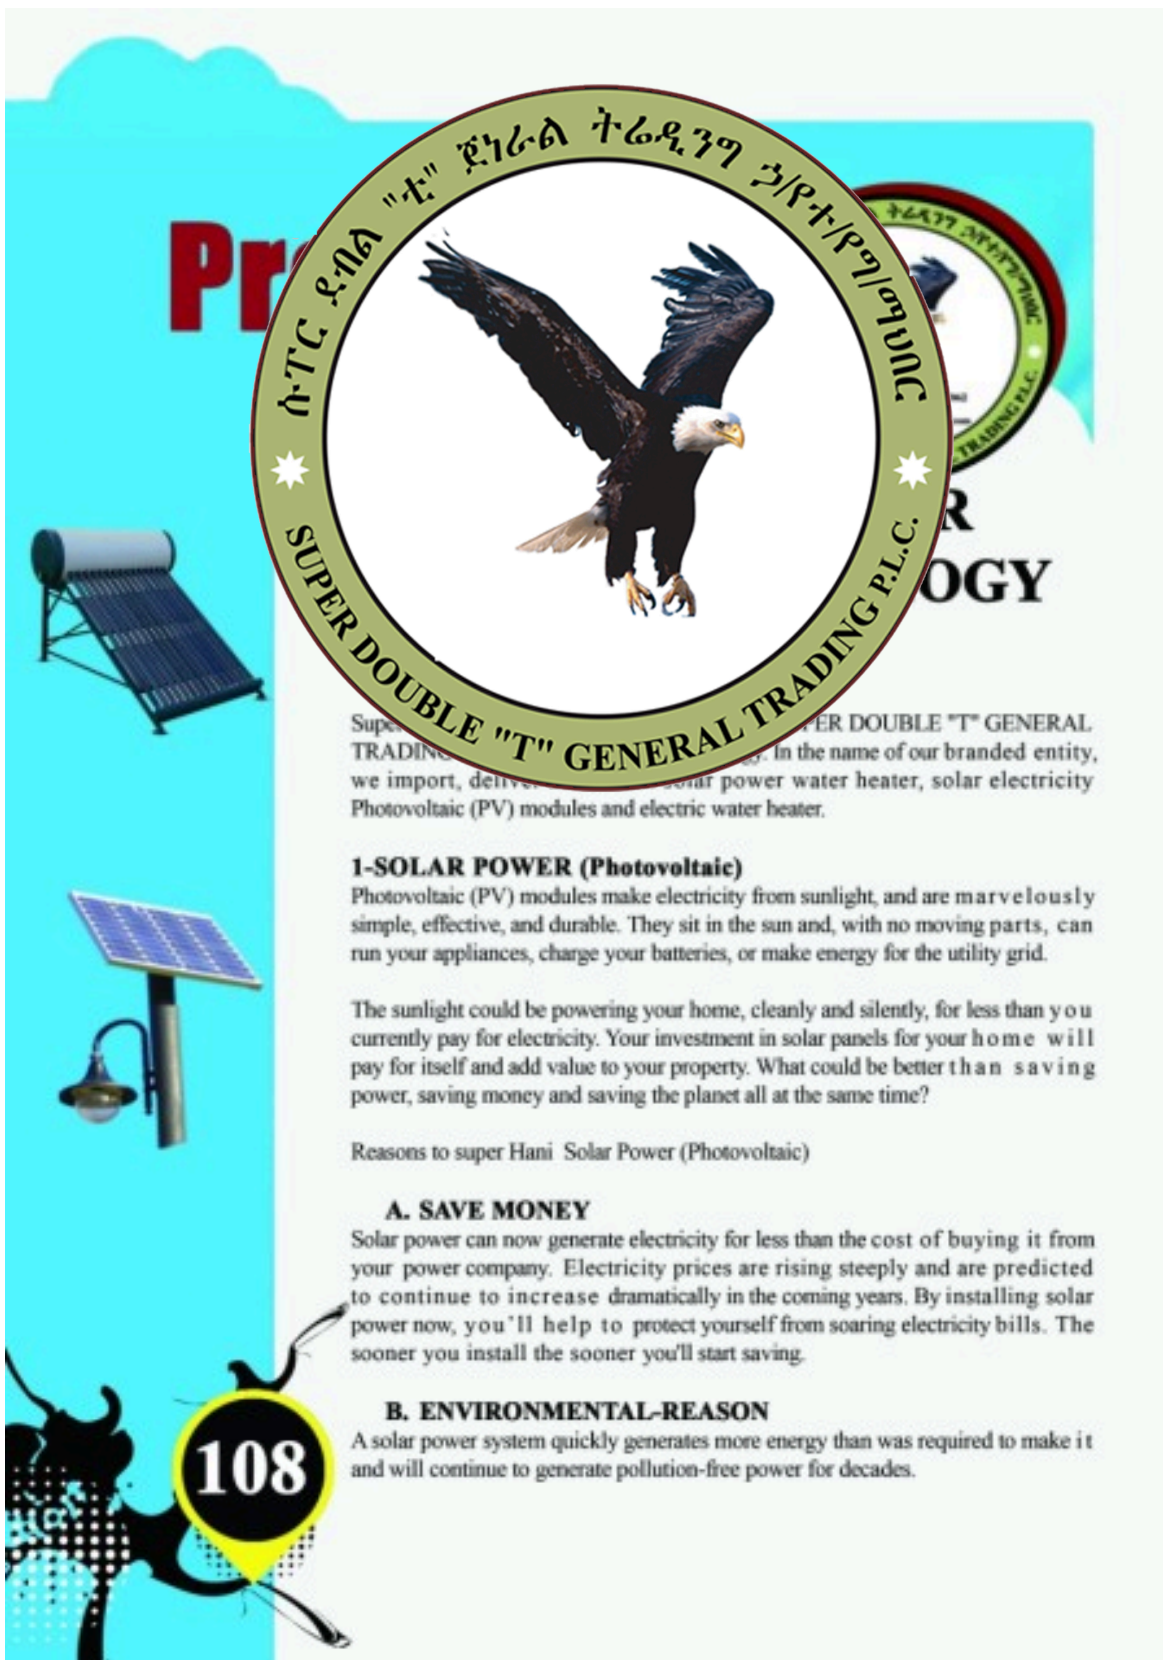

Pr

ሱፐር ደብል "ተ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

TECHNOLOGY

Super Double "T" General Trading P.L.C. In the name of our branded entity, we import, deliver, and install solar power water heater, solar electricity Photovoltaic (PV) modules and electric water heater.

1-SOLAR POWER (Photovoltaic)

Photovoltaic (PV) modules make electricity from sunlight, and are marvelously simple, effective, and durable. They sit in the sun and, with no moving parts, can run your appliances, charge your batteries, or make energy for the utility grid.

The sunlight could be powering your home, cleanly and silently, for less than you currently pay for electricity. Your investment in solar panels for your home will pay for itself and add value to your property. What could be better than saving power, saving money and saving the planet all at the same time?

Reasons to super Hani Solar Power (Photovoltaic)

A. SAVE MONEY

Solar power can now generate electricity for less than the cost of buying it from your power company. Electricity prices are rising steeply and are predicted to continue to increase dramatically in the coming years. By installing solar power now, you'll help to protect yourself from soaring electricity bills. The sooner you install the sooner you'll start saving.

B. ENVIRONMENTAL-REASON

A solar power system quickly generates more energy than was required to make it and will continue to generate pollution-free power for decades.

108



Pr

ከፕሮ ደብል "ተ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

renewable energy
heating systems
solar water heaters
Cost Effective Way
any climate, and the
Water Heater system

REDUCE ENERGY BILLS

Electricity & gas prices are rising. So installing Solar Water Heater system can help insulate you from future price shocks, ensuring yourself of a more stable future. With 25% of average energy bills coming from heating water, changing your hot water heater to a simpler solution can make a dramatic difference to the household budget.

OTHER BENEFIT

This include doing something positive for the environment, setting an example for others to follow & installing technology that will be the standard in the decades to come.

ADD CAPITAL VALUE TO YOUR HOME

It's difficult to point to any clear cut proof that installing a quality Solar Water Heater system will increase your home's value - simply not enough homes with systems on the roof have been bought and sold to find an answer.

Adding solar Water Heater system is a great way to increase your home's energy rating.

ENVIRONMENT

While the debate in the media could easily lead us to believe that scientific opinion is split 50/50 on whether humans are causing climate change, or not, In reality the academic split is closer to 99/1.

109



Pr

ኤ.ፒ.ሲ. ደ.ባል "ቲ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር

SUPER DOUBLE "T" GENERAL TRADING P.L.C.

energy source to

water on demand. By

so that the flowing water is

at the desired temperature and

flow rate. heater will automatically disconnect

itself from the power

ADVANTAGES OF USING ELECTRIC WATER HEATER:

- Saving space by having a fairly small appliance versus a bulky storage tank.
- Easy and simple installation.
- Saving money
- Built to meet the most advanced international standards.

110







ስፐር ደብል "ቲ" ጀነራል ትሬዲንግ ኃ/የተ/የግ/ግብር
 SUPER DOUBLE "T" GENERAL TRADING P.L.C.

Designed by
 Mesh Printing Work
 0913 428667

Mob. 0911 657062, 0930 070493, 0911 524804, 0930 034715,
 Tel. 011 3698075, 011 3698164, 011 3213183/84
 Fax. 011 3213184 /
 Email: Supertt2012@gmail.com /
 www.sdtplc.com / www.superdtplc.com