



Flooring solutions with blend of aesthetics and functionality.



60X60cm I 40X40cm I 30X30cm

Johnson introduces the Digital & SSR Floor Tile collections. It's a collection that combines style and strength. When we say style we mean designs that suit the requirements of contemporary themes in interior designing and when we say strength, we mean a build-quality that can take on all wear and tear in day to day usage.

Design-wise these tiles draw inspiration from nature and are greener alternatives to Wood, Marble or other Natural Stones. This product line also brings the ease and flexibility in application.


SSR stands for Style, Strength, Scratch and Stain resistance!



60X60cm I 40X40cm I 30X30cm



Style that protects!

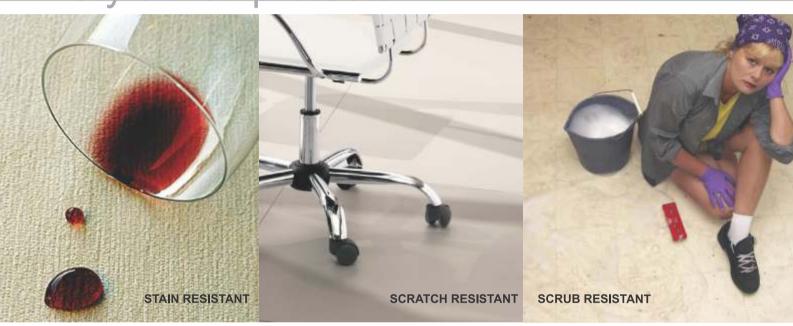

The Johnson SSR Advantage


Features	Benefits
Stylish	 Designs that perfectly complement modern architectural requirements. Greener alternatives to Wood, Marble and Natural Stones.
Safe	Protective shield makes it skid resistant.Optimum grip even in wet conditions.
Stain Resistant	Protective shield lets no amount of stain stick to the surface of tile.
Scrub Resistant	 Protection against scrubbing and scouring. Best suited for high traffic areas like corridor and office floors and passages.







TOSCANA DK



SSR CANVERA



SSR CHOCO



SSR WHITE



MORCEL WHITE



URBANIA FLOOR







SSR ANTIGO



ROCKCEILAN GRIS



PRETORIA NOCE



BOTTEGA DK




BARCAWOOD LT




BARCAWOOD DK







SSR GRIS

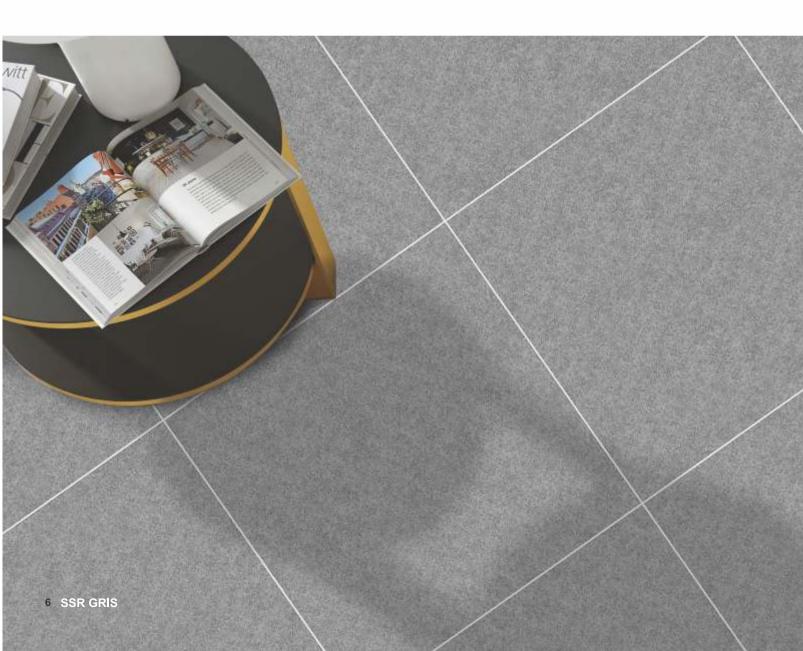








SSR MEDEN

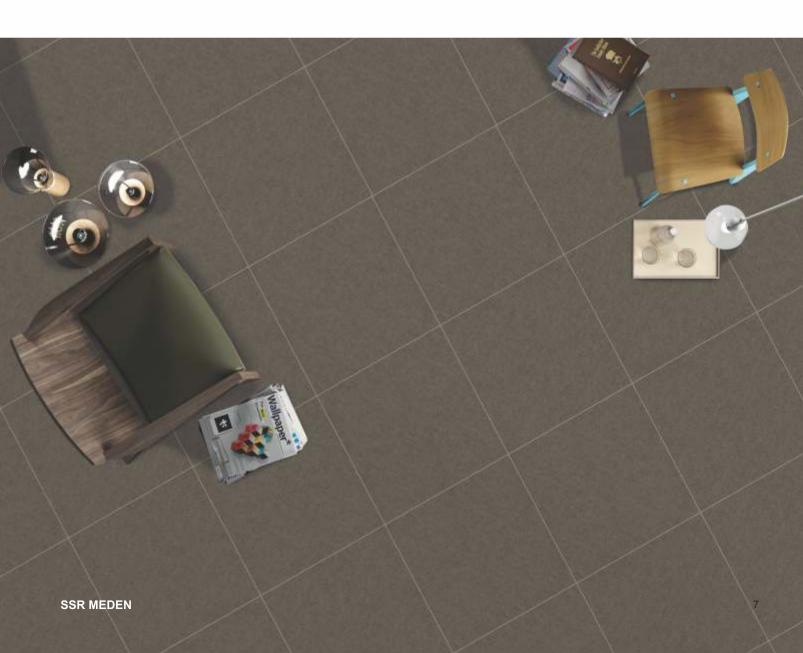





Satin Matt Finish



GRANOLITE GREY



GRANOLITE WHITE







DOLCEE WOOD



STONE BLOCK GREY



STONE BLOCK BEIGE



GRANOLITE DECO



STONE BLOCK BROWN











Rectified Matt Finish



PLANK NATURA



CEMENT FUSION



TASMANIAN OAK WOOD



PINEWOOD













TORRENCE ASHWOOD



KASHMIRA WOOD



CAIRO



TORRENCE BEIGE



STAR WOOD



HERITAGE WOOD







WOOD LOG LIGHT



WOOD STRIPES MIX



ROMAN SLYVIA



EGYPTO BROWN



WOOD STRIPES MONO



RUST FIRENZA





MAYFAIR ASH



MIX WALNUT WOOD



BURBERRY



TRAVI MARB



GRAN BEIGE







CASA MARMOL 1



OXFORD MARMOL 1



CASA MARMOL 2



OXFORD MARMOL 2







CARRARA GRAPHIC





MARBLE WOOD BK



MIX WOOD RISER



WOODY CHECK





LENOX BROWN



LENOX BEIGE







SPRUCE ASHWOOD



S-WOOD WALLNUT



S-WOOD MAPPLE



S-WOOD NATURAL



NIAGARA COTTO SA



NIAGARA CREMA SA RU



60X60cm



BIRCH WOOD



BERMUDA ROSE



BERMUDA WOOD



EAGAN ROSE



WOOD PLANKO



EUROPEAN WALNUT WOOD





LENOX CAFÉ



LENOX VERDE



SANDUNE BEIGE



SANDUNE CREMA




SANDUNE GREY



MAPPLE BROWN

Floor Tiles | 40X40cm

Matt Series

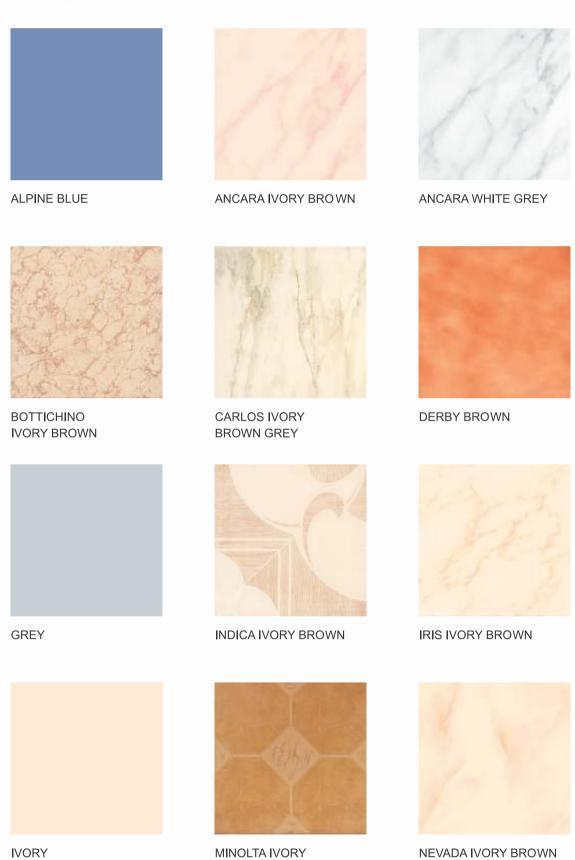

BROWN GOLD





NEVADA WHITE GREY



SWIFT WHITE BEIGE



TERRO BROWN



WHITE



WOODY IVORY BROWN




Floor Tiles | 30X30cm

Plain Series







GREY



IVORY



WHITE

Print Series



ALTIS AQUA BLUE



ANCARA IV BR



ANCARA WH GY



IRIS IVORY BROWN



NEVADA IV BR



NEVADA WH GY





BLACK

Quartz Series



QUARTZ GREEN



QUARTZ GREY



QUARTZ IVORY



QUARTZ PEACH



QUARTZ PINK



QUARTZ SAND BR

Quartz Spl



QUARTZ WHITE



ALPINE BLUE



QUARTZ BLUE

Technical Specifications

Sr. No.	Property	International Standard ISO 13006/EN14411 Group Blla Requirement	Johnson Floor Value	Test Method
	Dimensions & Surface Quality			
1	Deviation in Length & Width	± 0.6% or 2.0mm	± 0.2%	ISO 10545-2
2	Deviation in Thickness	± 5% or 0.5mm	± 4%	ISO 10545-2
3	Straightness of Sides	± 0.5% or 1.5mm	± 0.1%	ISO 10545-2
4	Rectangularity	± 0.5% or 2.0mm	± 0.2%	ISO 10545-2
5	Surface Flatness	± 0.5% or 2.0mm	± 0.2%	ISO 10545-2
6	Surface Quality	Min 95% Free from Visible Defects	>95% Free from Visible Defects	ISO 10545-2
	Physical Property			
7	Water Absorption	3 < E <u><</u> 6%	3 < E <u><</u> 6%	ISO 10545-3
8	Modulus of Rupture	≥ 22 N/mm²	≥ 25 N/mm²	ISO 10545-4
9	Breaking Strength	≥ 1000 N	≥ 1100 N	ISO 10545-4
10	Resistance to Deep Abrasion of Unglazed Tiles	<u><</u> 345mm³	Not Applicable	ISO 10545-6
11	Resistance to Surface Abrasion of Glazed Tiles for Floor Application	Report Abrasion Class	II-V	ISO 10545-7
12	Coefficient of Linear Thermal Expansion	Report Value	≤ 9 x 10 ⁻⁶ K ⁻¹	ISO 10545-8
13	Thermal Shock Resistance	Report Result	Resistant	ISO 10545-9
14	Crazing Resistance of Glazed Tiles	Report Result	Resistant	ISO 10545-11
15	Frost Resistance	Report Result	Resistant	ISO 10545-12
16	Moisture Expansion	Report Value	≤ 0.3 mm/m	ISO 10545-10
17	Small Color Differences - for plain colored tiles, where required in a specification	GL : △E<0.75 UGL : △E<0.75	GL : △E<0.75	ISO 10545-16
18	Impact Resistance	Report Value	≥ 0.55	ISO 10545-5
19	Scratch Hardness of Surface (Moh's Scale)	Report Value	≥ 5	EN 101/DIN 18155
20	Slip Resistance for Floor Application	Report Value	0.30 - 0.45	ANSI B101.3
21	Bulk Density (g/cc)	Report Value	≥ 1.8	ASTM C373-16
	Chemical Property			
22	Resistance to Staining			
	- Glazed Tiles	Min Class 3	Min Class 3	ISO 10545-14
	- Unglazed Tiles	Report Resistance Class	Not Applicable	ISO 10545-14
23	Resistance to Chemicals			
а	Resistance to Low Concentrations of Acids and Alkal	is		
	- Glazed Tiles	Report Resistance Class	ULA	ISO 10545-13
	- Unglazed Tiles	Report Resistance Class	Not Applicable	ISO 10545-13
b	Resistance to High Concentrations of Acids and Alka	lis Report Resistance Class	UHA	ISO 10545-13
С	Resistance to Household Chemicals and Swimming Pool Salts			
	- Glazed Tiles	GB	UA	ISO 10545-13
	- Unglazed Tiles	UB	Not Applicable	ISO 10545-13
24	Lead & Cadmium Release - for Glazed Tiles, where required	Report Value	Nil	ISO 10545-15
25	Color Resistance to UV light	Report Result	No Change in Color	DIN 51094

Packaging Details

Product	Nominal Size (cm)	No of Tiles/Box	Approx Area/Box (sq m)	Approx Weight/Box (kgs)	Approx Cartons/ 20' Container	Approx Area per Container (sq m)
Johnson 60x60 Floor Tiles Digital & SSR	60x60	4	1.44	30	900	1296
Johnson 40x40 Floor Tiles Non Digital	40x40	8	1.28	22.7	1189	1522
Johnson 30x30 Floor Tiles Non Digital	30x30	15	1,35	22,2	1216	1642
Johnson 30x30 Floor Tiles Digital	30x30	12	1.08	21.7	1244	1344



You can also reach us at

Region	Branch	Tel.:
EAST	West Bengal (Kolkata) Odisha (Bhubaneshwar) Ranchi Siliguri Guwahati	033-22272128/29 0674-6539836/6539837 9798845560 9836065812 9127066591
WEST	Mumbai - Bandra to Dahanu Mumbai - Central Thane to Raigad Pune Ahmedabad Indore	022 - 30647500/26547300 022 - 30647500/26547300 022 - 30246600 020-41301164/31/61/63 079-30072051/52/53/54/55 0731-4007441
NORTH	Jalandhar Chandigarh Delhi Jaipur Ghaziabad Lucknow Patna	01824-505038/39 0172 - 4697100 / 4656940 011-49526600 0141-2333922 0120-4110377 0522- 4025128/4065471/4026028 0612-2254252
SOUTH	Bangalore Hyderabad Vijayawada Vishakapatnam Tirupathi Chennai Coimbatore Salem Madurai Tuticorin Trichy Ernakulam Calicut Trivandrum	080-25446841/42/43/46 040-29802270/71/72 0866-2543616/17 0891-2796376 0877-3254151 044-28544116/28541881 0422-2540501/2548439 0427-2280636/2280637/2280639 0452-4355584/4355594 0461-2271558/2278585 0431-2904730/40/50 0484-4098500/509/510 0495-2702505/2301474 0471-2551141

For address and contact numbers of our Johnson Exclusive Showrooms and Authorized Retailers, please visit our website www.hrjinida.com

Toll Free No.: 1800-22-7484 **E-mail :** tiles.customercare@prismjohnson.in For Export Enquiries, Email: exports.customercare@prismjohnson.in





PRISM JOHNSON LIMITED

(FORMERLY PRISM CEMENT LIMITED)

H & R JOHNSON (INDIA) DIVISION

Corporate Office: 7th Floor, Windsor, C. S. T. Road, Kalina, Santacruz (East), Mumbai - 400 098, India.

Tel.: +91-22-4064 7300 / 2654 7300 Fax: +91-22-3064 7400 Website: www.hrjindia.com Export Website: www.prismtiles.com

Registered Office: 305, Laxmi Niwas Apartments, Ameerpet, Hyderabad - 500016, Telangana, India.

Contact branch for Pre laying services available for select products.

Colors shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice. Sometimes, variations in shade or size may occur which is inherent to the ceramic industry. Before fixing the tiles, we urge you to read and follow the fixing instructions given on the carton box of the tiles. The company will not take any responsibility and will not accept any complaints of shade, size or planarity once the tiles have been fixed.

Although every effort is made to ascertain that all the information provided in this brochure is accurate before printing, errors may still happen. Please contact the local branch office for updated information before placing orders. The information contained in this catalog is given in good faith. The Company takes no liability on account of any loss or damage either consequential or otherwise as a result of the information provided therein.

Google play

Android version app

View our Tile informative videos









Scan this QR code to download iOS version app

