


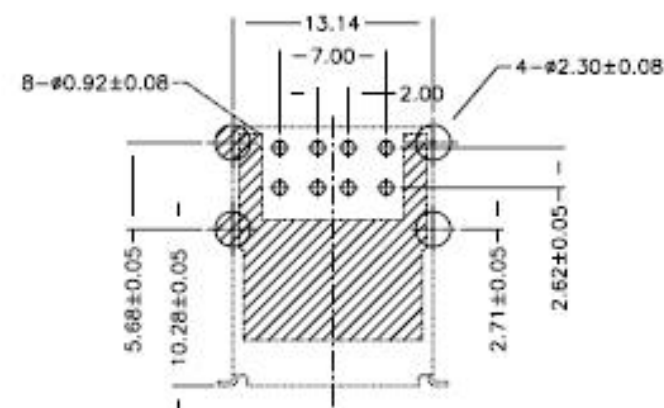


彈片可接轉求保固無虞

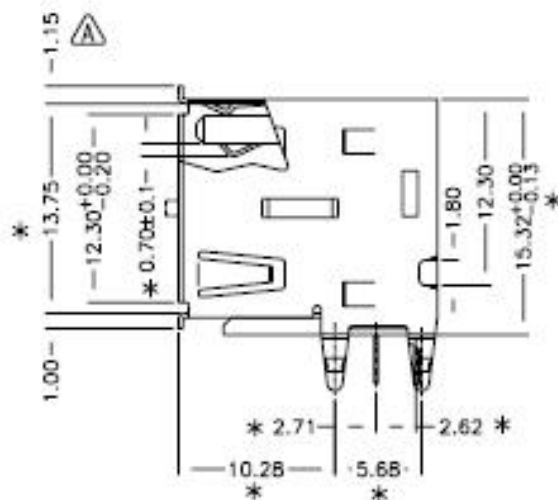

BOTTOM VIEW

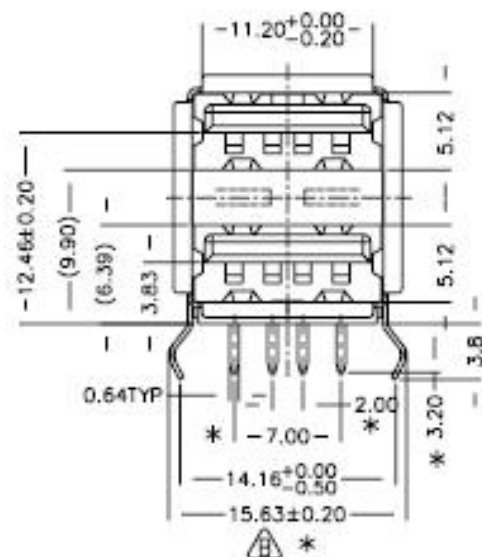

RECOMMEND P.C.Board  
HOLE LAYOUT

NOTE:

MATERIAL:

- 1).TERMINAL: PHOSPHOR BRONZE
- 2).TERMINAL PLATED: GOLD PLATING ON CONTACT AREA  
100u" MIN. TIN ON SOLDER TAILOVER 50~100u" MIN. NICKEL
- 3).FRONT SHELL: BRASS T=0.30mm  
BACK SHELL: SPCC. T=0.30mm  
SPRING SHELL: BRASS T=0.30mm
- 4).FRONT SHELL & SPRING SHELL PLATED: TIN PLATED  
BACK SHELL : NICKEL PLATED
- 5).HOUSING: P.B.T+30% C.F.(UL94V-0) RATED

SPECIFICATION

- 1).CONTACT RESISTANCE: 25m Ω (MAX)
- 2).INSULATION RESISTANCE: 1000M Ω (MAX)
- 3).DIELECTRIC:WITHSTANDING VOLTAGE: 750A VC AT SEA LEVEL
- 4).MATING FORCE: 35N MAX  
UNMATING FORCE: 10N MIN.



ITEM: USB A TYPE DOUBLE

REV  
R

DRAWN BY: EMILY

SCALE: NONE

DATE:05.10.06

CHECKED BY: John Ho

CUSTOMER: C331

PAGE: 1/1

APPROVED BY: Jason Zhuang

CUSTOMER P/N:

ALL DIMENSIONS IN mm (UNLESS OTHERWISE SPECIFIED)