


TEC Cable Spooling Unit

Note: this is a generic site layout and is subject to change as operations require. Risk shall be managed using numerous tools including, but not limited to: JSA's, SOP's, Permits (WPTW Rev 3) & Hazob cards. Everyone has the authority to stop unsafe practices. Kinetic exclusion zone/s encompasses high pressure, lifting, & gun loading activities. External personnel must not breach these zones.

MUSTER POINT

Noise: Spooling Unit
Idle < than 0dBA
RIH 55 dBA

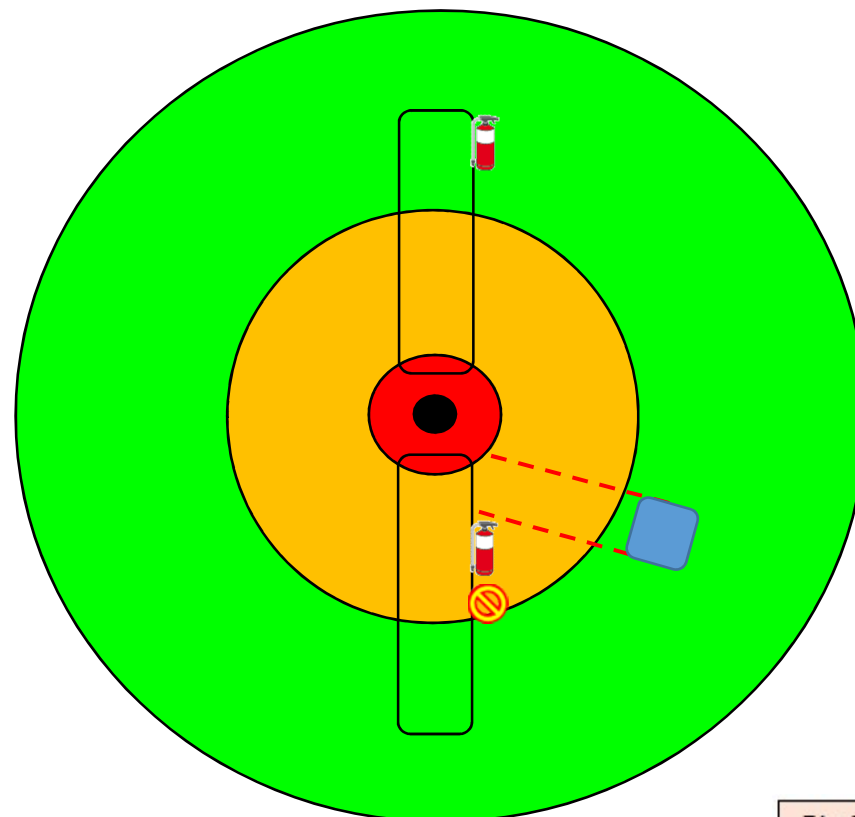

- Wellhead
- Zone 1 (3m)
- Zone 2 (15m)
- Zone 3 (30m)
- - - Kinetic exclusion zone
- ⊘ ESD
- ⊕ First aid Kit
- 🧯 Fire Extinguisher
- 📦 TEC Cable Spooling Unit
- 🚚 Light Vehicle
- 🧴 SPILL KIT
- 💡 Lighting tower (4x1000w)
- 💡 Lit area
- 🟢 MUSTER POINT
- 🚚 Rig Carrier or Catwalk

Z1 = 3m Intrinsically safe, Ignition sources controlled
Z2 = 15m Potential ignition sources controlled
Z3 = 30m Hot work approved