HURACAN

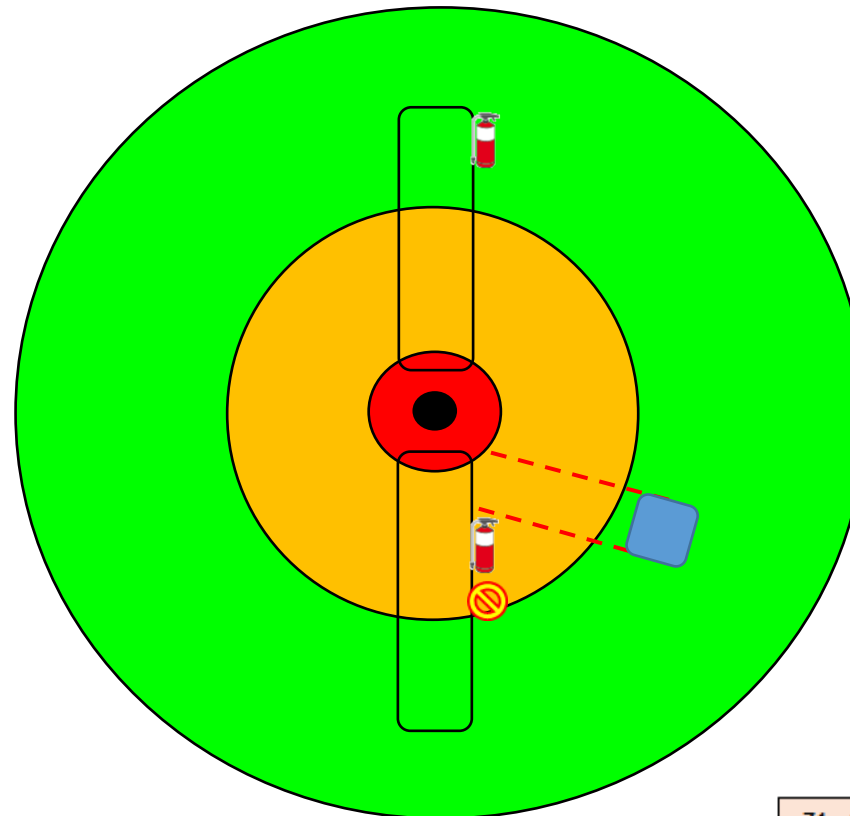**TEC Cable Spooling Unit**

Note: this is a generic site layout and is subject to change as operations require. Risk shall be managed using numerous tools including, but not limited to: JSA's, SOP's, Permits (WPTW Rev 3) & Hazob cards. Everyone has the authority to stop unsafe practices.Huracan exclusion zone/s encompasses high pressure, lifting, & gun loading activities. External personnel must not breach these zones.

MUSTER POINT

Noise: Spooling Unit
Idle < than 0dBA
RIH 55 dBA

MUSTER POINT

Legend:
- ● Wellhead
- ● Zone 1 (3m)
- ● Zone 2 (15m)
- ● Zone 3 (30m)
- --- Kinetic exclusion zone
- 🚫 ESD
- ➕ First aid Kit
- 🧯 Fire Extinguisher
- TEC Cable Spooling Unit
- Light Vehicle
- SPILL KIT Spill Kit
- ● Lighting tower (4x1000w)
- ⭕ Lit area
- MUSTER POINT Muster Point
- Rig Carrier or Catwalk

Z1 = 3m	Intrinsically safe, Ignition sources controlled
Z2 = 15m	Potential ignition sources controlled
Z3 = 30m	Hot work approved