


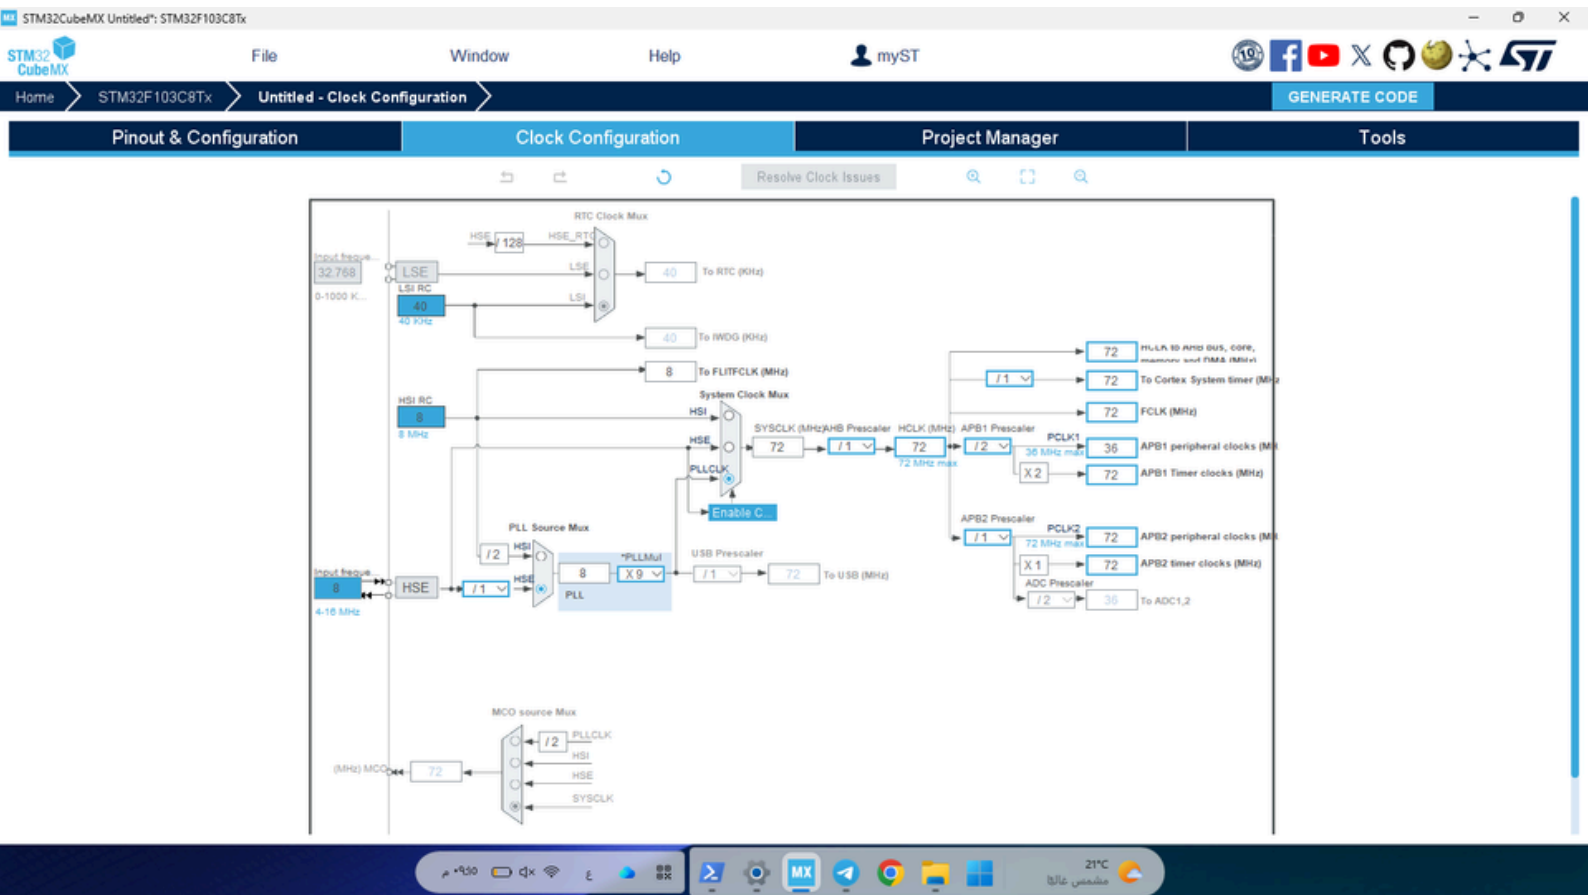

STM32CubeMX Untitled*: STM32F103C8Tx

File Window Help myST

Home STM32F103C8Tx Untitled - Pinout & Configuration GENERATE CODE

Pinout & Configuration

Categories A-Z

- System Core
 - DMA
 - GPIO
 - IWDG
 - NVIC
 - ✓ RCC
 - ▲ SYS
 - WWDG
- Analog
- Timers
 - RTC
 - TIM1
 - ▲ TIM2
 - ✓ TIM3
 - TIM4
- Connectivity
 - CAN
 - ✓ I2C1
 - SPI1
 - SPI2
 - USART1

I2C2 Mode and Configuration

Mode: I2C I2C

Configuration

Reset Configuration

- Parameter Settings
- User Constants
- NVIC Settings
- DMA Settings
- GPIO Settings

Configure the below parameters :

Search (Ctrl+F)

Master Features	
I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000
Slave Features	
Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address activation	Disabled

Pinout view

System view

Pinout diagram of STM32F103C8Tx LQFP48 package. Pins are labeled with functions: VBAT, PC13, PC14, PC15, RCC_OSC_IN, RCC_OSC_OUT, VDD, VSSA, VDDA, GPIO_Output, PA0, PA1, GPIO_Input, PA2, PA3, PA4, PA5, PA6, PA7, PA8, PA9, PA10, PA11, PA12, PA13, PA14, PA15, PB0, PB1, PB2, PB3, PB4, PB5, PB6, PB7, PB8, PB9, PB10, PB11, PB12, PB13, PB14, PB15, VDD, VSS, I2C_SCL, I2C_SDA.

Pinout & Configuration Clock Configuration Project Manager Tools

Software Packs Pinout

TIM3 Mode and Configuration

Mode

Slave Mode

Trigger Source

☒ Internal Clock

Channel1

Channel2

Channel3

Channel4

Combined Channels

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration


Parameter Settings User Constants NVIC Settings DMA Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

Pinout view System view

STM32F103C8Tx LQFP48

GPIO pins: PA0, PA1, PA2, PA3, PA4, PA5, PA6, PA7, PA8, PA9, PA10, PA11, PA12, PA13, PA14, PA15, PB0, PB1, PB2, PB3, PB4, PB5, PB6, PB7, PB8, PB9, PB10, PB11, PB12, PB13, PB14, PB15, PC0, PC1, PC2, PC3, PC4, PC5, PC6, PC7, PC8, PC9, PC10, PC11, PC12, PC13, PC14, PC15, PD0, PD1, PD2, PD3, PD4, PD5, PD6, PD7, PD8, PD9, PD10, PD11, PD12, PD13, PD14, PD15, PE0, PE1, PE2, PE3, PE4, PE5, PE6, PE7, PE8, PE9, PE10, PE11, PE12, PE13, PE14, PE15, PF0, PF1, PF2, PF3, PF4, PF5, PF6, PF7, PF8, PF9, PF10, PF11, PF12, PF13, PF14, PF15, PG0, PG1, PG2, PG3, PG4, PG5, PG6, PG7, PG8, PG9, PG10, PG11, PG12, PG13, PG14, PG15, PH0, PH1, PH2, PH3, PH4, PH5, PH6, PH7, PH8, PH9, PH10, PH11, PH12, PH13, PH14, PH15, PI0, PI1, PI2, PI3, PI4, PI5, PI6, PI7, PI8, PI9, PI10, PI11, PI12, PI13, PI14, PI15, PJ0, PJ1, PJ2, PJ3, PJ4, PJ5, PJ6, PJ7, PJ8, PJ9, PJ10, PJ11, PJ12, PJ13, PJ14, PJ15, PK0, PK1, PK2, PK3, PK4, PK5, PK6, PK7, PK8, PK9, PK10, PK11, PK12, PK13, PK14, PK15, PL0, PL1, PL2, PL3, PL4, PL5, PL6, PL7, PL8, PL9, PL10, PL11, PL12, PL13, PL14, PL15, PM0, PM1, PM2, PM3, PM4, PM5, PM6, PM7, PM8, PM9, PM10, PM11, PM12, PM13, PM14, PM15, PN0, PN1, PN2, PN3, PN4, PN5, PN6, PN7, PN8, PN9, PN10, PN11, PN12, PN13, PN14, PN15, PO0, PO1, PO2, PO3, PO4, PO5, PO6, PO7, PO8, PO9, PO10, PO11, PO12, PO13, PO14, PO15.

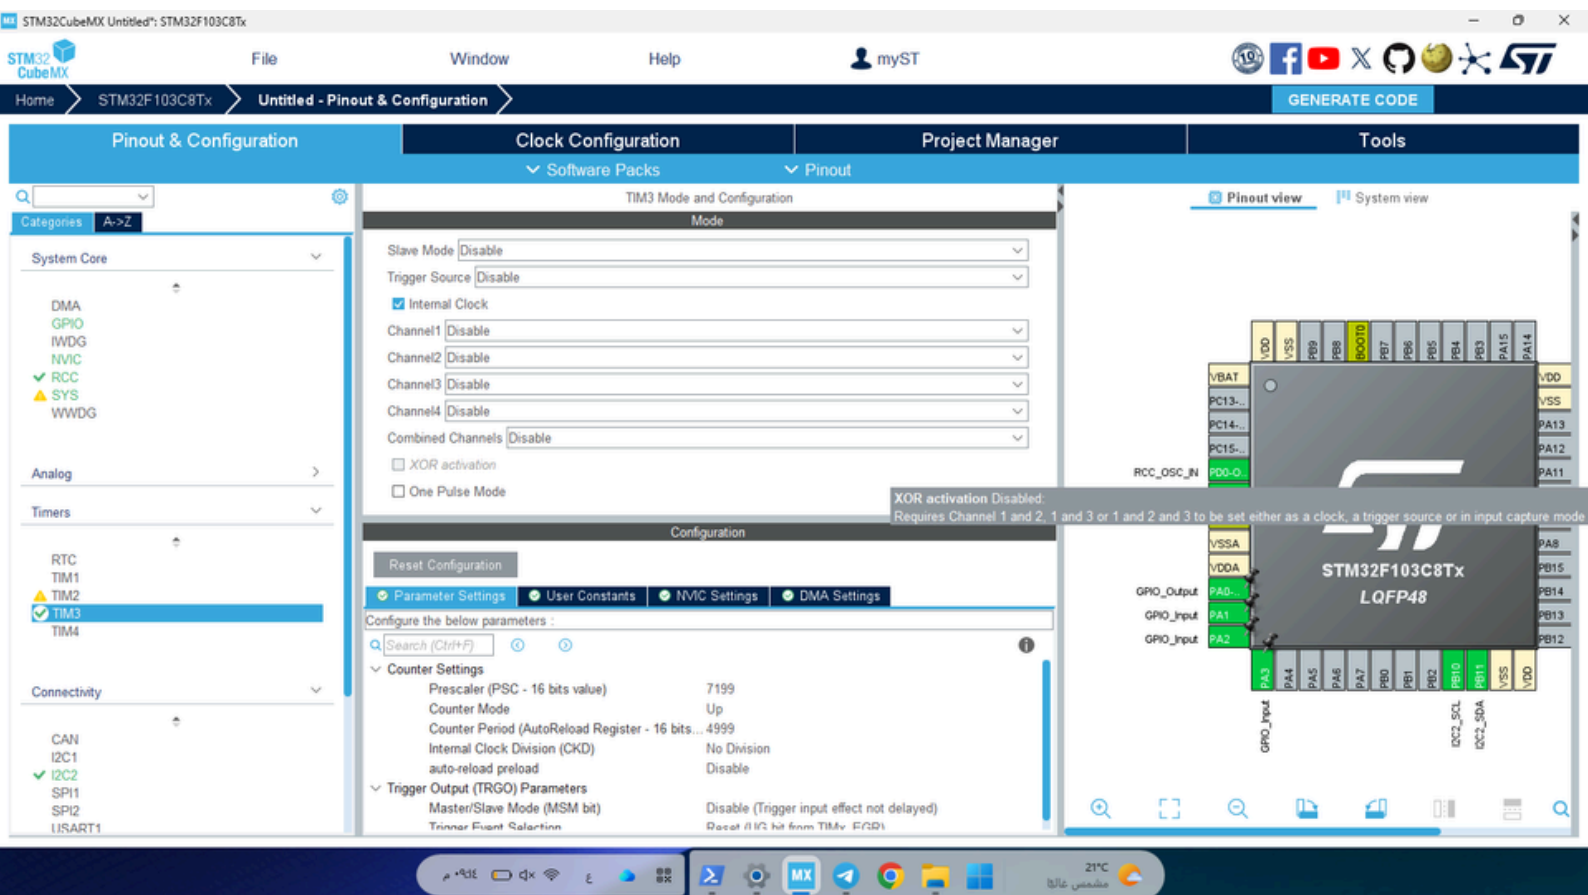

Pinout & Configuration

Categories: A-Z

System Core

- DMA
- GPIO**
- IWDG
- NVIC
- ✓ RCC
- ▲ SYS
- WWDG

Analog

Timers

- RTC
- TIM1
- ▲ TIM2
- ✓ TIM3
- TIM4

Connectivity

- CAN
- ✓ I2C1
- I2C2
- SPI1
- SPI2
- USART1

Clock Configuration

Software Packs

Pinout

GPIO Mode and Configuration

Configuration

Group By Peripherals

GPIO I2C RCC

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin Name	Signal on Pin	GPIO output	GPIO mode	GPIO Pull-u...	Maximum o...	User Label	Modified
PA0-WKUP	n/a	Low	Output Pus...	No pull-up a...	Low		☐
PA1	n/a	n/a	Input mode	Pull-up	n/a		☒
PA2	n/a	n/a	Input mode	Pull-up	n/a		☒
PA3	n/a	n/a	Input mode	Pull-up	n/a		☒

PA3 Configuration :

GPIO mode:

GPIO Pull-up/Pull-down:

User Label:

Project Manager

Tools

Pinout view System view