


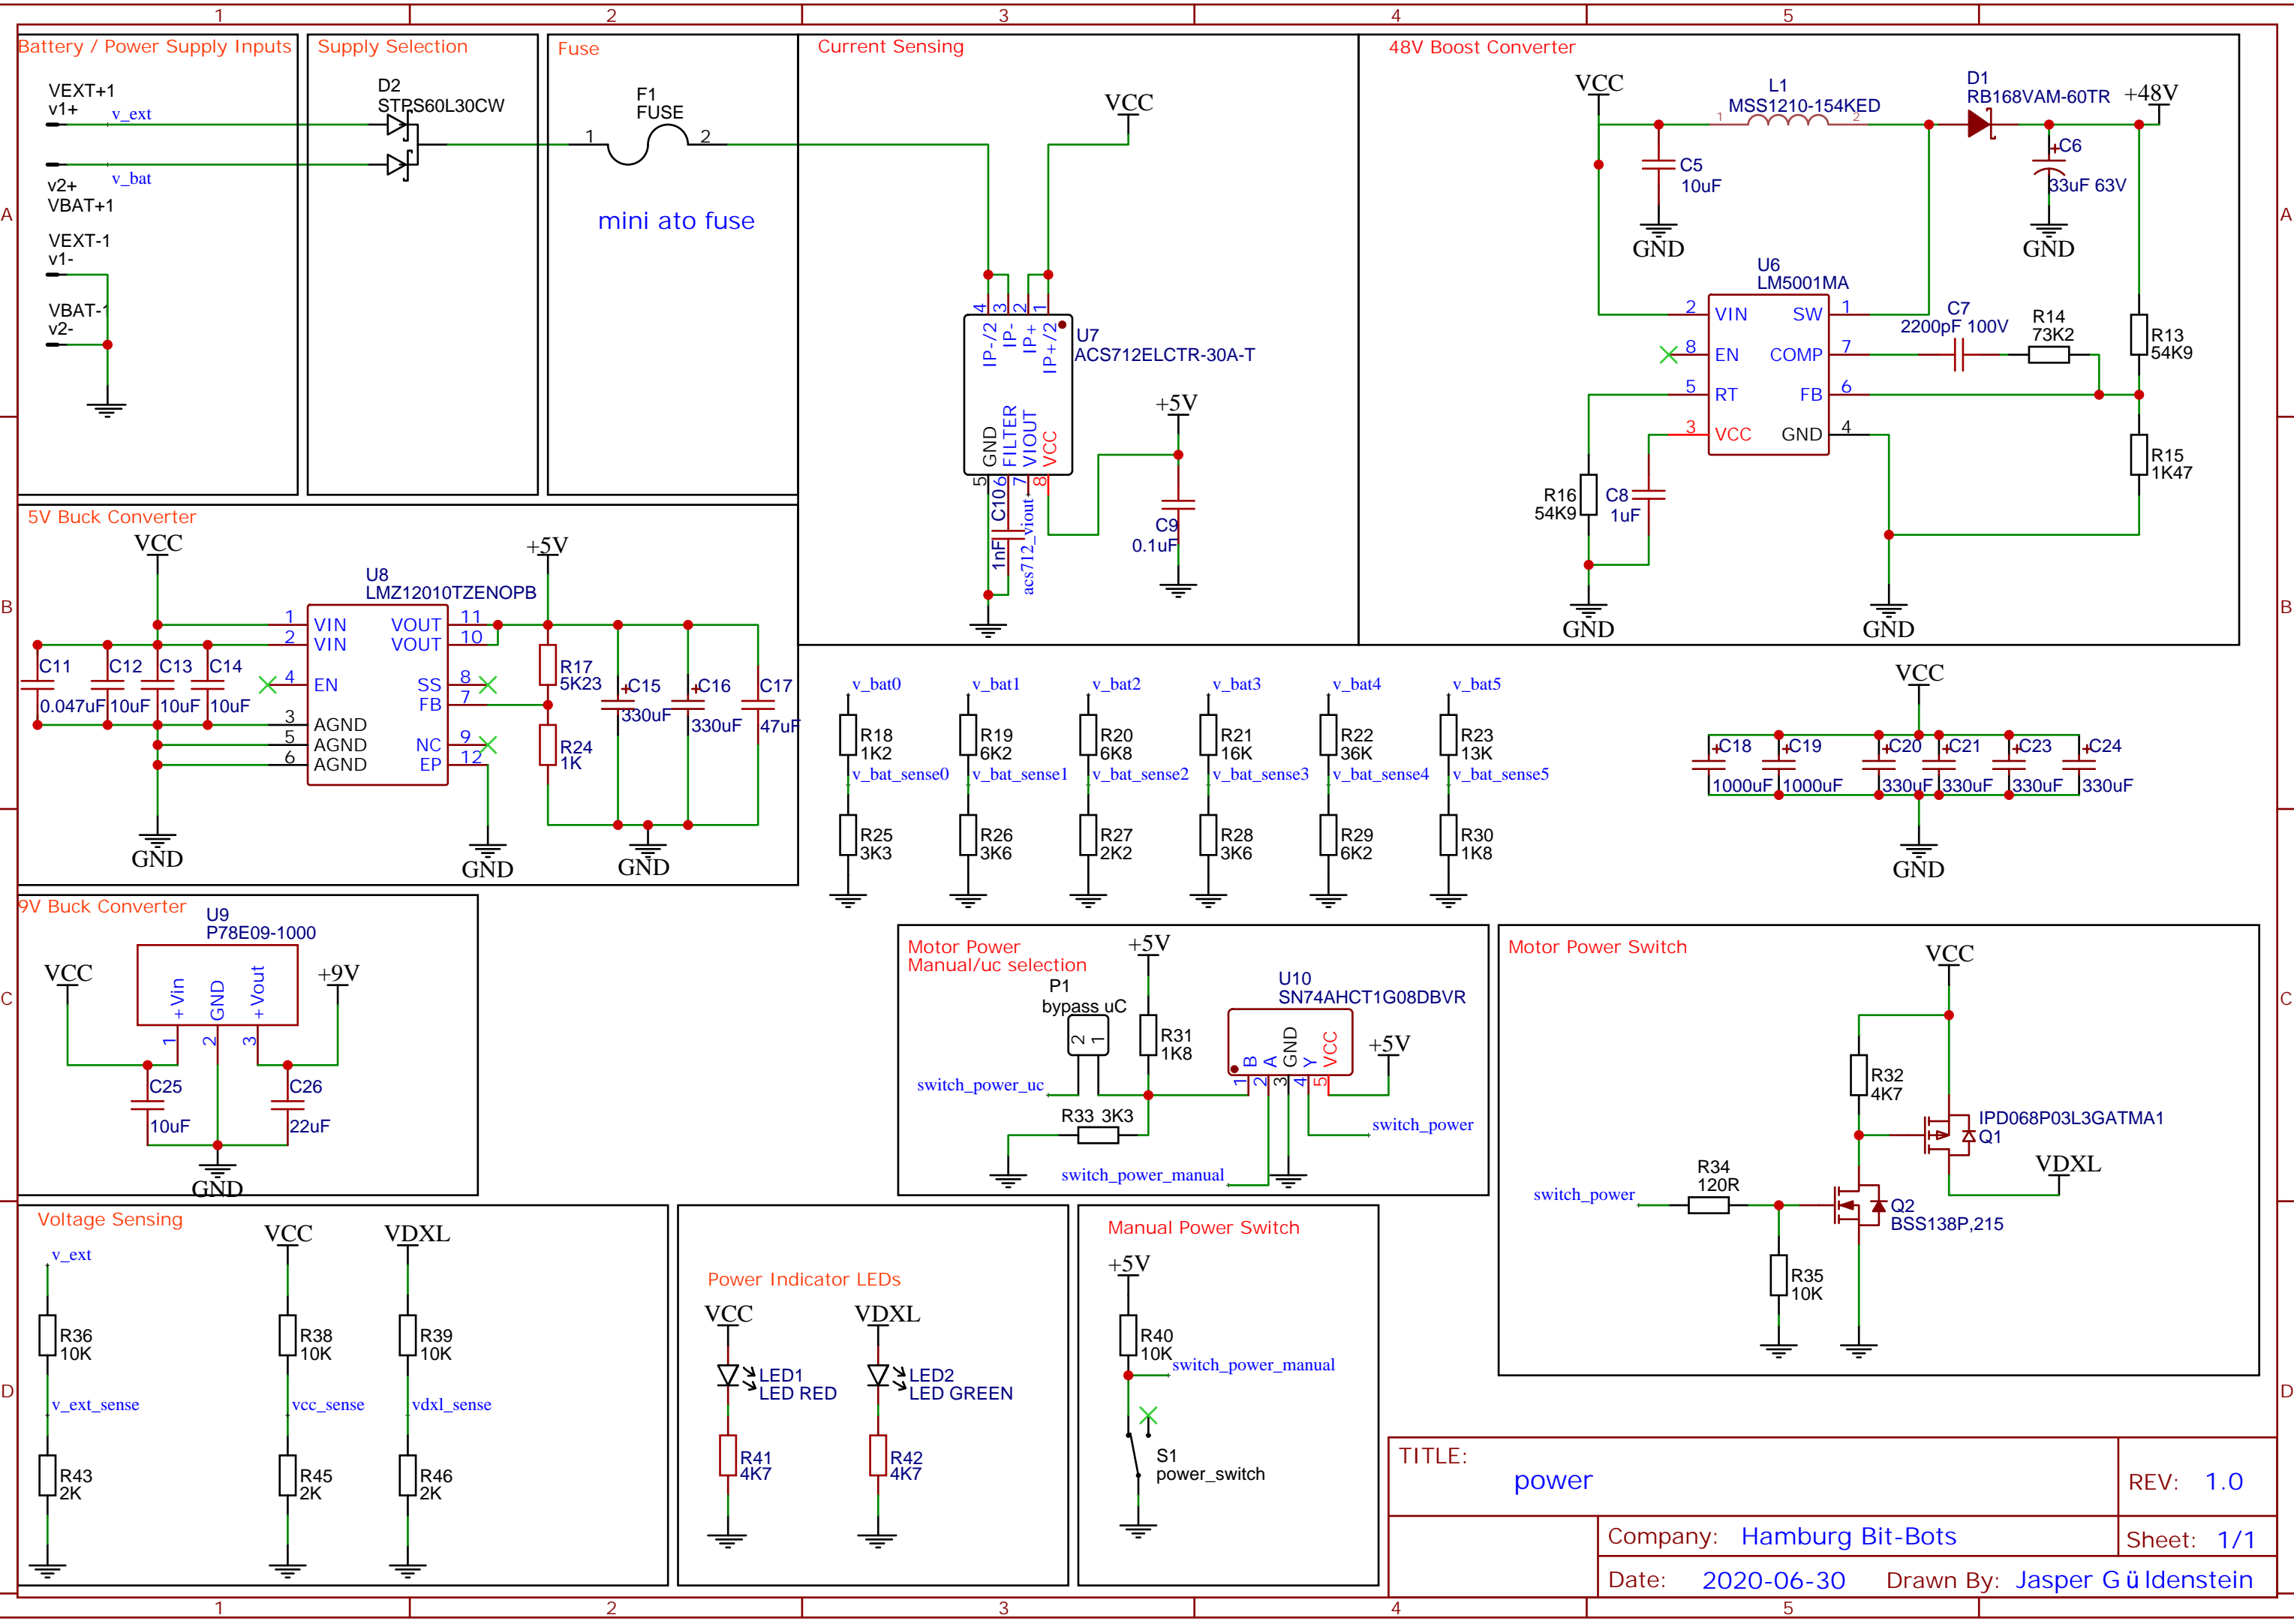
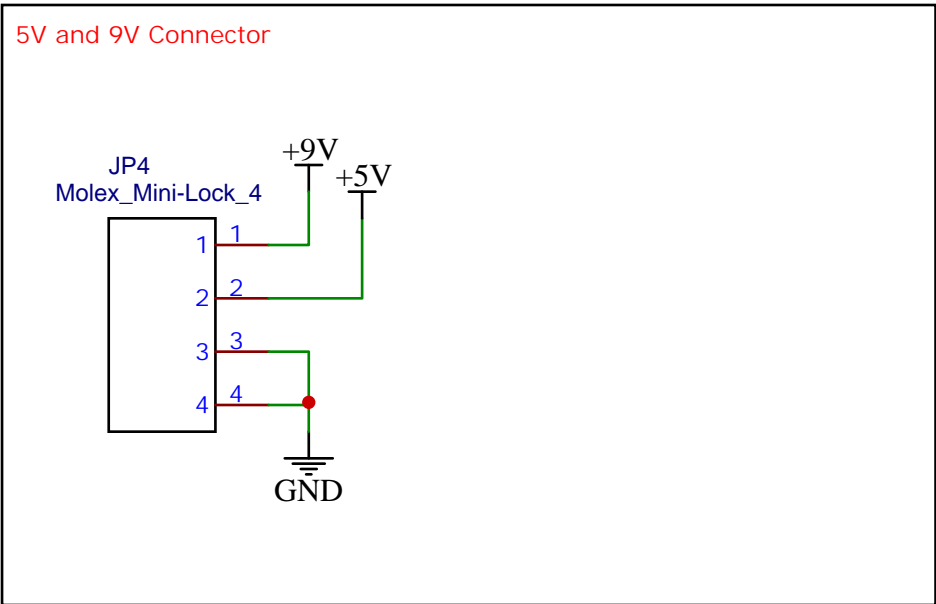

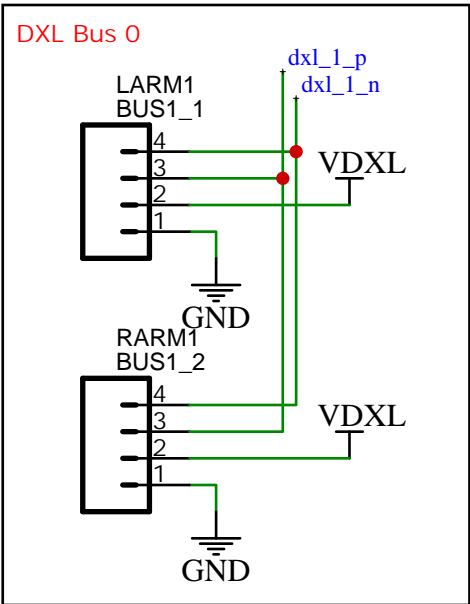
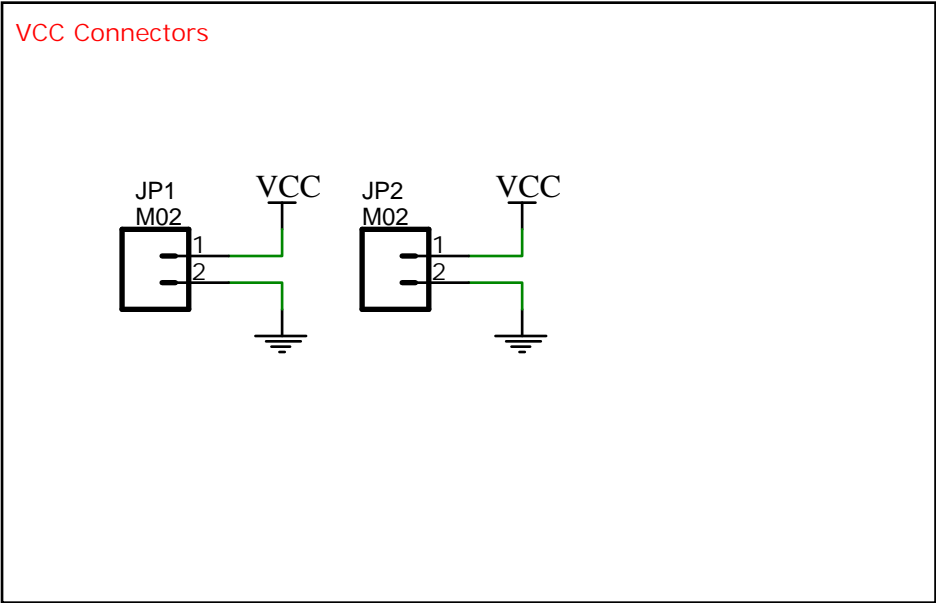



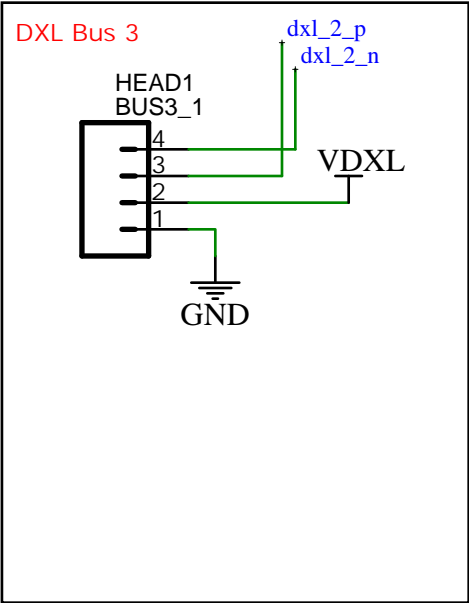


TITLE: dxl_control		REV: 1.0
	Company: Hamburg Bit-Bots	Sheet: 1/1
	Date: 2020-06-30 Drawn By: Jasper G ü ldenstein	



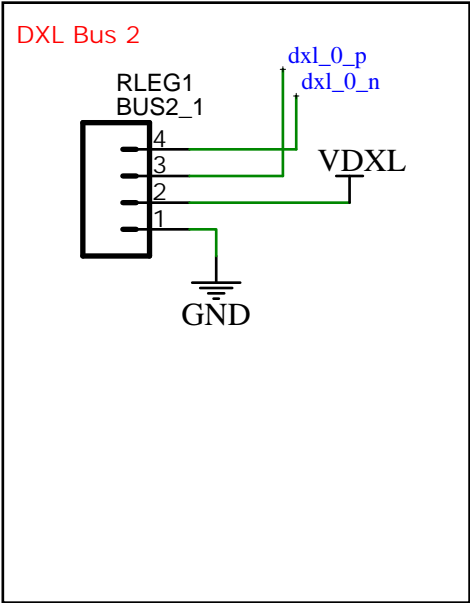


TITLE: power		REV: 1.0
Company: Hamburg Bit-Bots		Sheet: 1/1
Date: 2020-06-30		Drawn By: Jasper G ü ldenstein

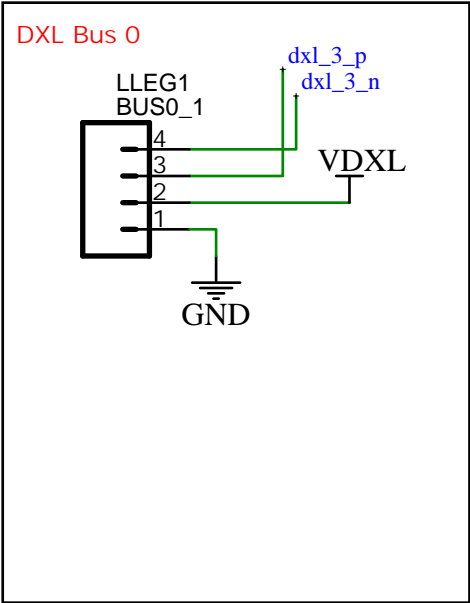

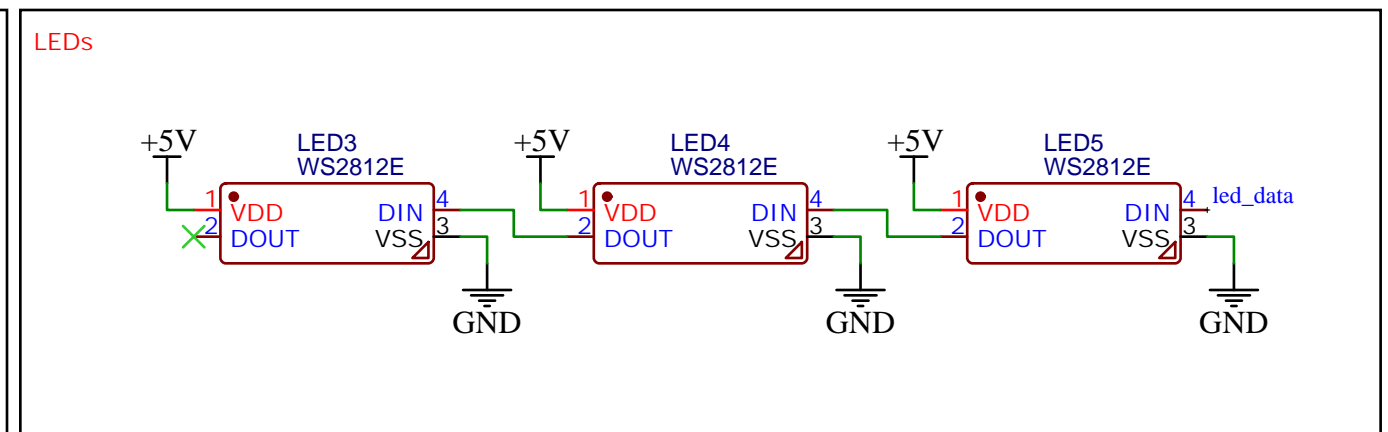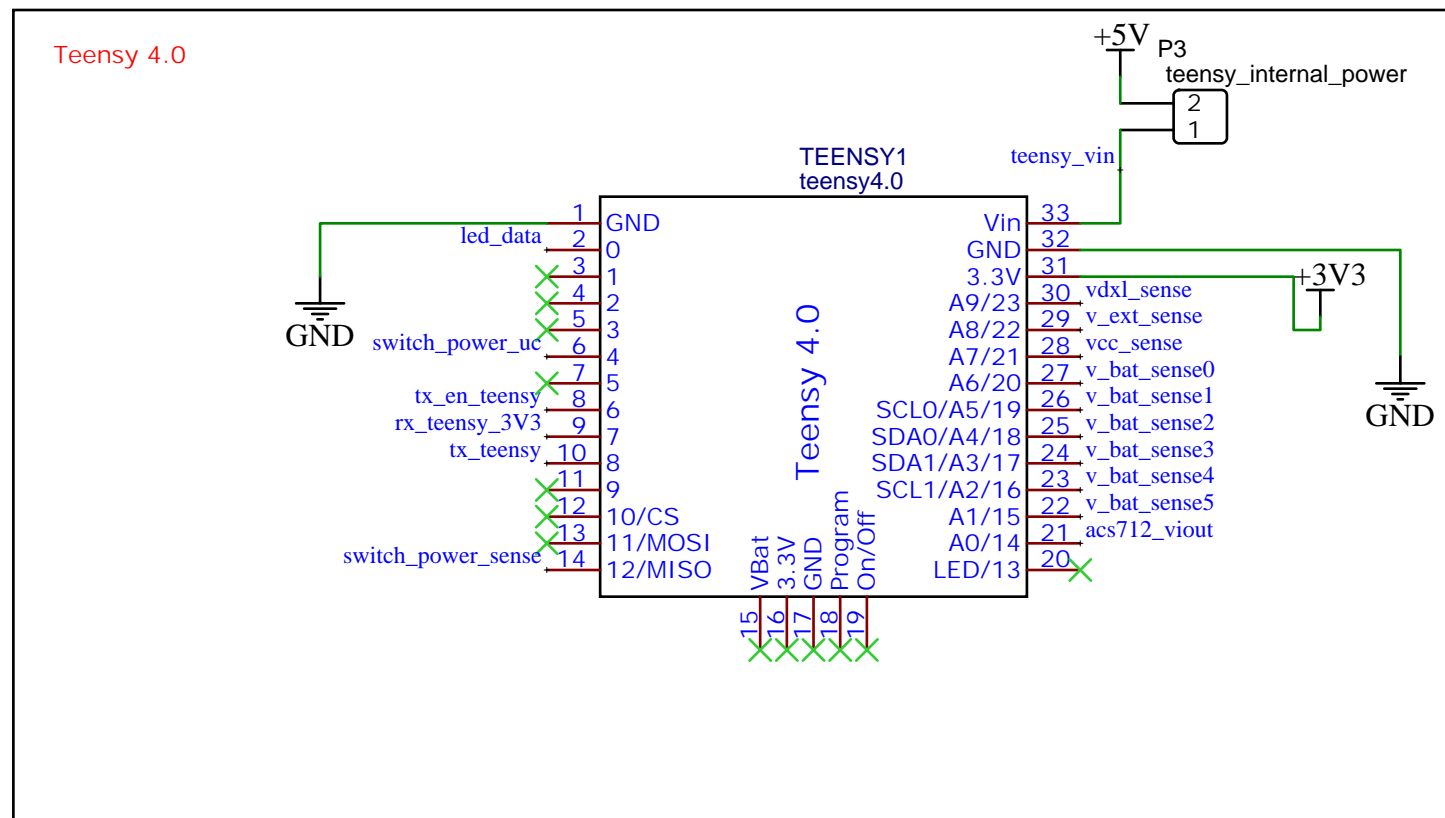

TODO next version: change switch power to manual switch so manual instead of result of and gate is read
to allow automatic reenabeling of power after manual off and on sequence

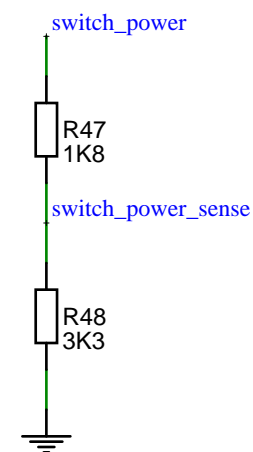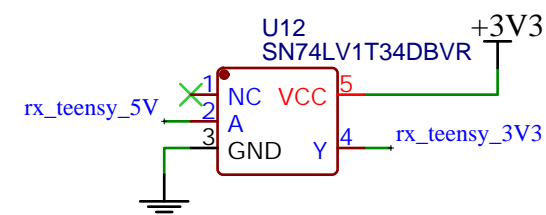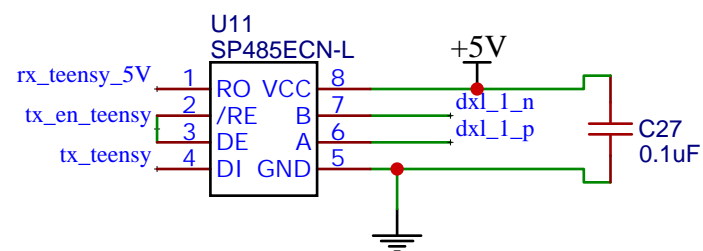

TODO next version:
pull
e and de to ground
so rs485 works on dx11 if teensy is not connected

TITLE: io		REV: 1.0
	Company: Hamburg Bit-Bots	Sheet: 1/1
	Date: 2020-06-30 Drawn By: Jasper G ü ldenstein	

