

Table 3-3. Boot Mode Control

Boot Mode	GPIO26	GPIO27	GPIO28
SPI Boot[1]	Any value	Any value	1[1]
Joint Download Boot 0[2]	Any value	1	0
Joint Download Boot 1[3]	0	0	0

[1] **Bold** marks the default value and configuration.

[2] Joint Download Boot 0 mode supports the following download methods:
- USB-Serial-JTAG Download Boot
- UART Download Boot
- SPI Slave Download Boot (chip revision v0.1 only)


[3] Joint Download Boot 1 mode supports the following download methods:
- UART Download Boot
- SDIO Download Boot

Table 5: Default Configuration of Strapping Pins


Strapping Pin	Default Configuration	Bit Value
GPIO25	Floating	–
GPIO26	Floating	–
GPIO27	Pull-up	1
GPIO28	Pull-up	1
GPIO7	Floating	–
MTMS	Floating IO2	–
MTDI	Floating IO3	–


If you are flashing for the first time, you need to get the ESP32-C5 into the download mode manually. To do so, press and hold the `BOOT` button and then press the `RESET` button once. After that release the `BOOT` button.


candidate to copy footprint

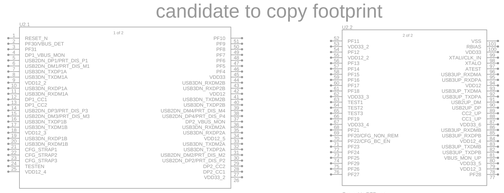

IST9201 component requested from EasyEDA
And at the moment you are looking at it should be available
Also Bogdan has access to IST9201 datasheet for your convinience

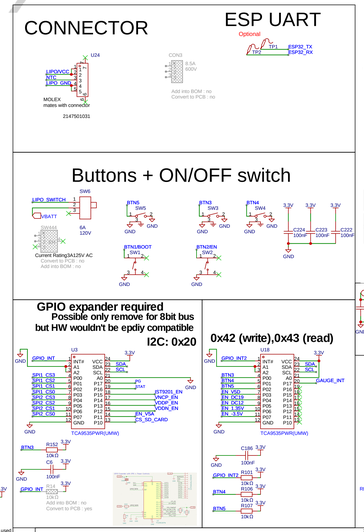





NEED TO TEST SHUNT nominal ! (maybe 5A is maximum consumption and 5mΩ will be enough)
recomender minimal 5mΩ, but we need 4mΩ for 6A range.
https://e2e.ti.com/support/power-management-group/power-management/f/power-management-forum/981508/bq27426-choice-for-ts-ntc-resistor

