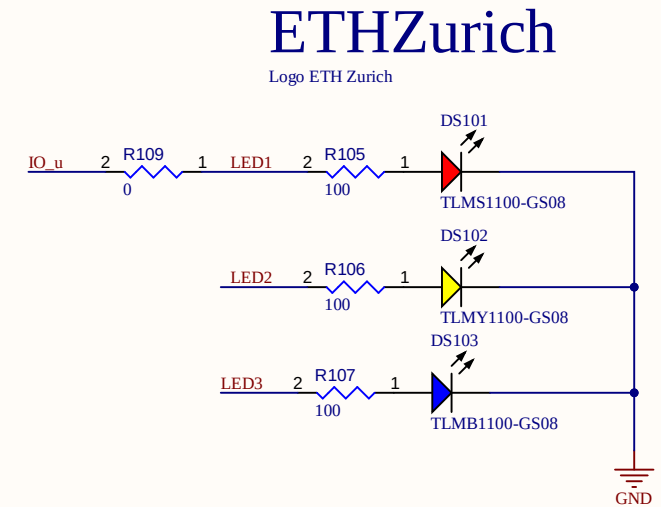
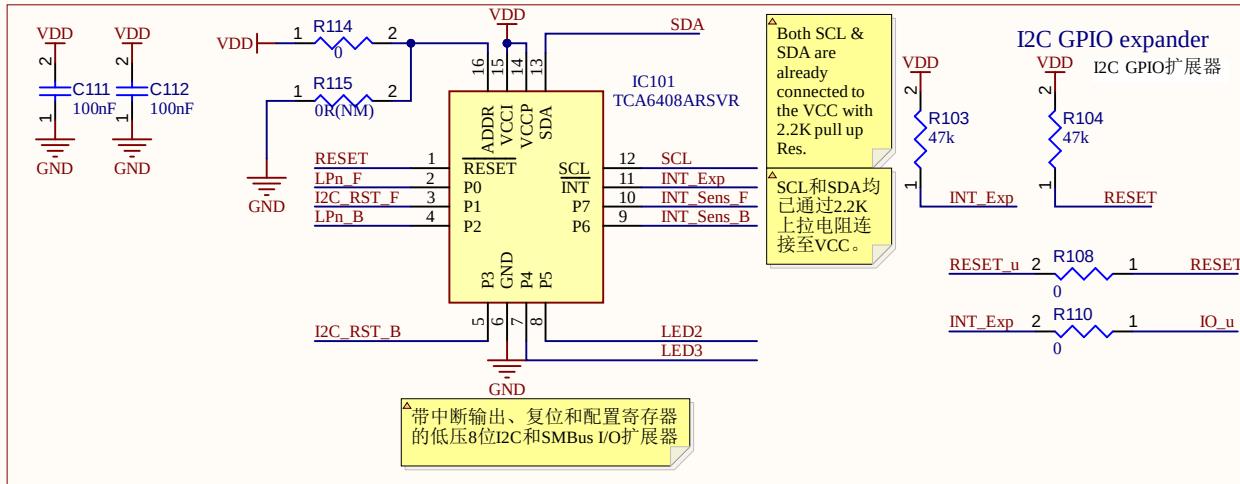
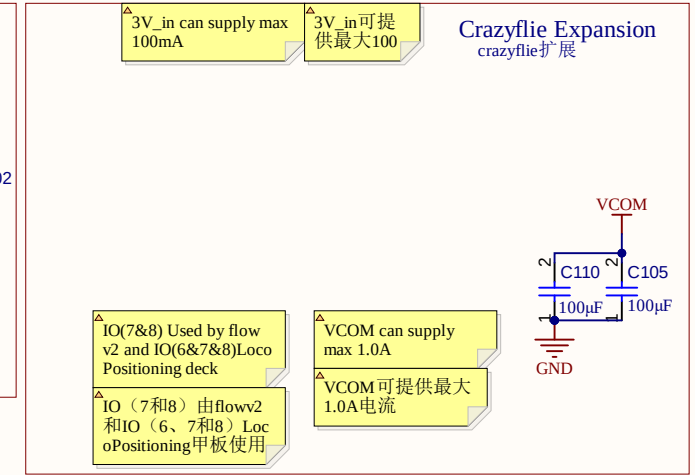
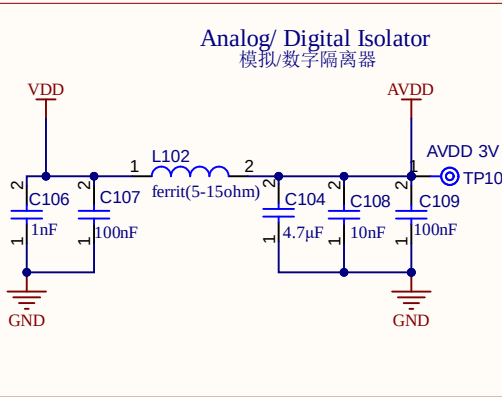
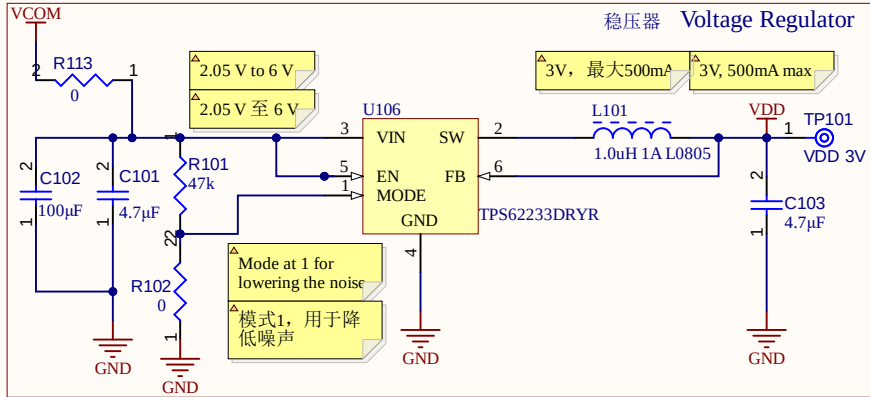


Title		
Size A4	Number	Revision
Date:	6/24/2026	Sheet of
File:	E:\0_project\...\Deck.SchDoc	Drawn By:


1

2


3

4


A

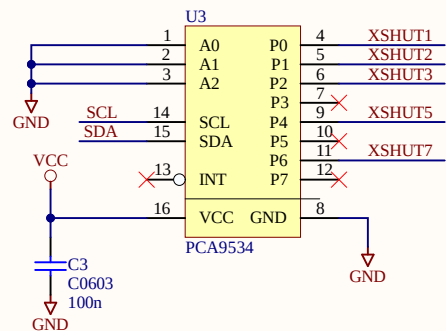


B

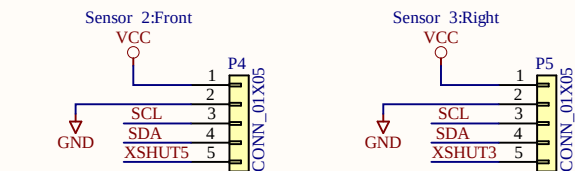




C






D

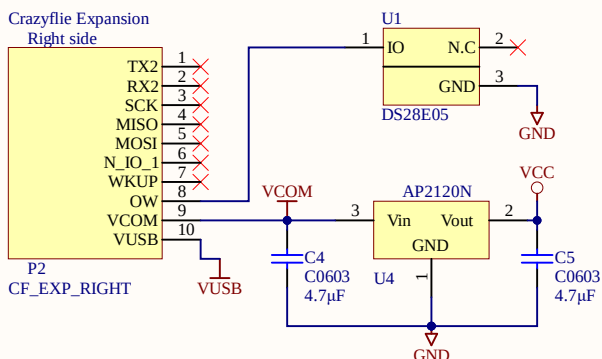




1

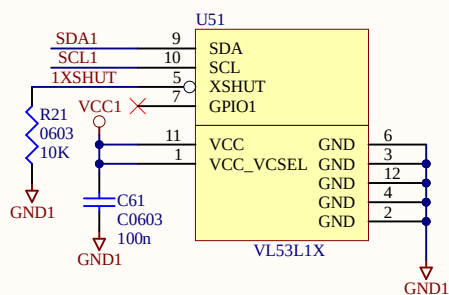




2

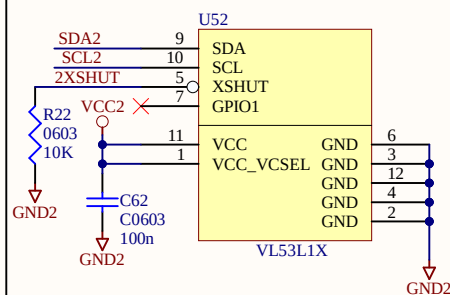

3

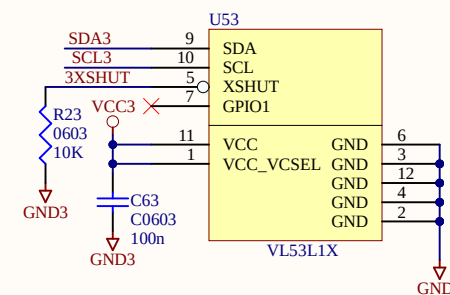

4

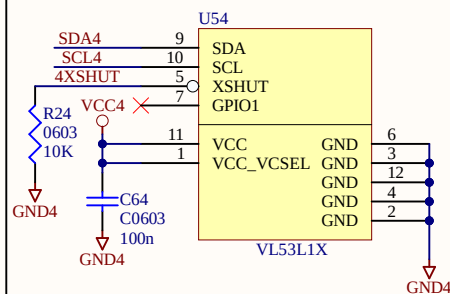

1

2

3







4

A

B

C

D

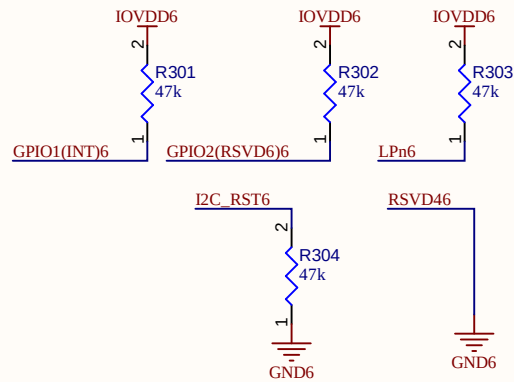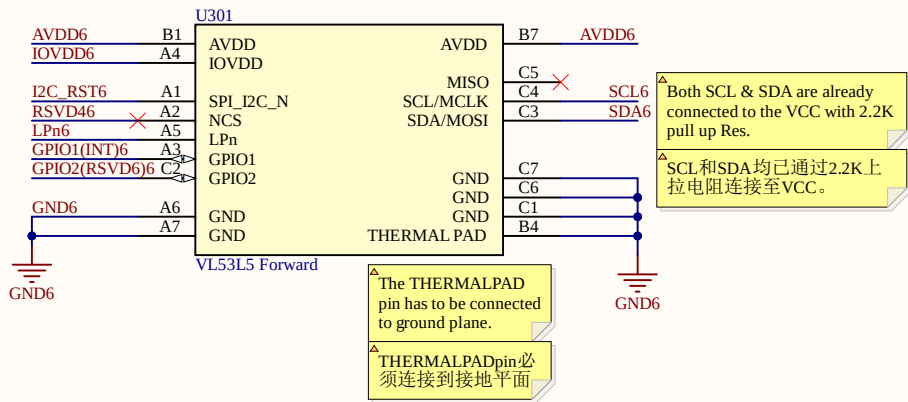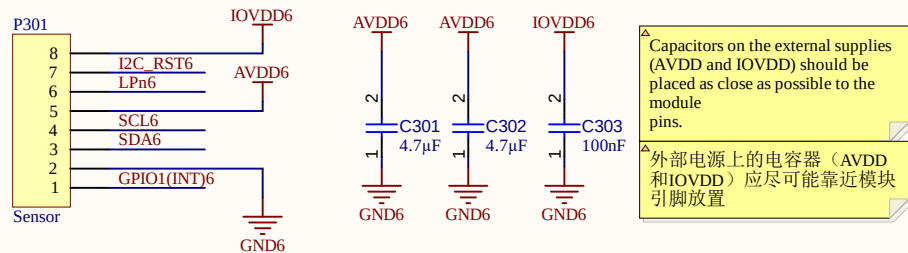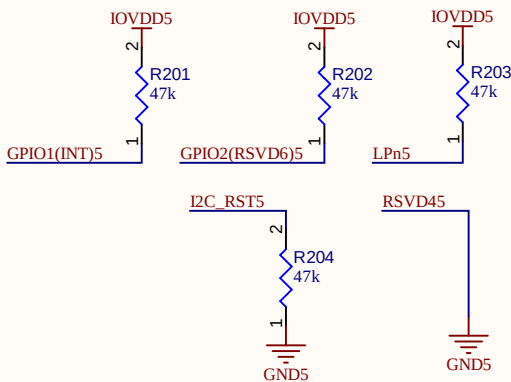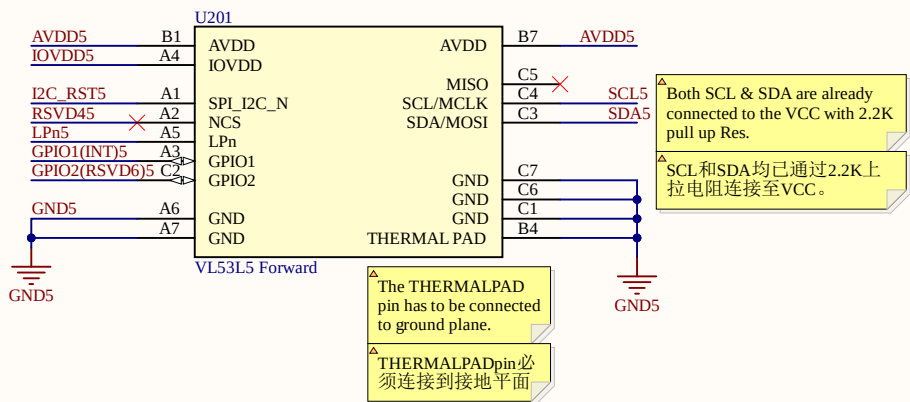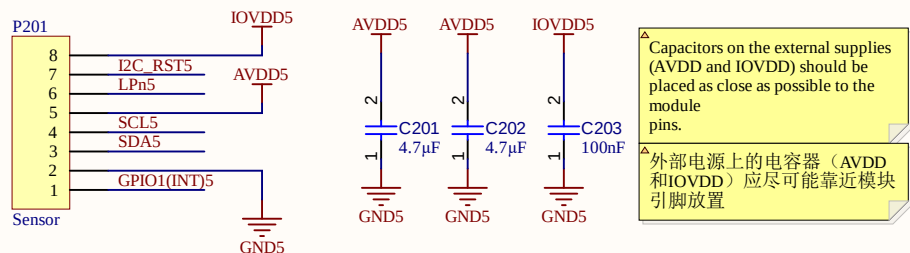

Current Rating of VL53L5 TOF Sensor:

VL53L5 TOF传感器的当前额定值:

Device State	Average current consumption				Unit
	AVDD		IOVDD		
	Typ.	Max.	Typ.	Max.	
LP idle	45	300	0.1	1	μA
HP idle	1.3	1.6	2.8	35	mA
Active ranging ⁽¹⁾	45	50	50	80	mA

1. Active ranging is when the device is actively ranging. The current consumption is not affected by 4x4 or 8x8 zone configuration

IOVDD peak current will be the average value +10 mA.

AVDD peak current will be the average current +10 mA.

Title		
Size	Number	Revision
A4		
Date:	6/24/2026	Sheet of
File:	E:\0_project\.\SensorBoard.SchDoc	Drawn By:

