



RCP1000W

COLD PLANER



Adopting mechatronics design for automation



1. Independent elevating control of left and right wheels for quick adjustment of milling depth and curb milling. Easy access doors provide convenient access for the operator to change tools for asphalt or concrete milling.

2. Full hydraulic travel and braking systems provide immediate response for effectiveness and safety. The hydrostatic closed loop system gives excellent power to weight ratios.

3. Rhino engine provides excellent power, reliability, and efficiency in adverse working conditions. Conveniently placed filters allow for easy maintenance.

Milling drums and tools are optimized to work efficiently and tackle any job effectively. Easy access doors provide convenient access to operator for drum maintenance and tool replacements.

POWER TRAIN	
Engine Make/Model	Rhino SC8D190G2B1
Net Power kW (Hp) @2,200 rpm	140(188)
Displacement L (cu.In)	8.3(506)
Emission Rating (optional)	Tier2 (Tier3, Tier4)
Fuel System	Direct Injection
Lubrication	Full-flow spin-on filter
Aspiration	Turbocharged
Air Cleaner	Under-hood, dual element dry type
Fan Drive	Belt driven
Electrical System	24 volts with 70 amp alternator, 120 Ah
TRAVEL SPEEDS	
Max Travel Speed km/h (mph)	13.0(8)
Drive Type	Wheels
Tire Diameter Front mm (in)	660(26)
Min. Turning Radius mm (ft)	6,750(22)
ROTOR	Tools are mounted on quick couples for easy replacement. Quick access panels provide easy maintenance for operator
Drive System	Hydraulically activated by operator, heavy-duty clutches mounted directly to the engine
Milling Speed m/min (in/min)	15(591)
Number of Tools	92
Cutting Width mm (in)	1,000(39)
Cutting Depth mm (in)	150(5.9)
Rotor Diameter mm (in)	720(28)
Tool Spacing (tip) mm (in)	15(0.6)
Speed @2,200 rpm	116
CONVEYOR SYSTEM	
Type	Hydraulically driven for maximum productivity
Width mm (in)	450(18)
Theoretical Capacity: m3/h (yd3/h)	84.1(110)
Max. Feeding Height mm (ft)	3,500(11)
Swing (°)	30(15 each side)
WATER SPRAY SYSTEM	Pressurized water spray system ensures dust control and belt lubrication. Flat pattern spray provides better cleaning performance
HYDRAULIC SYSTEM	
Pump Type	Gear Pump, constant displacement
System Pressure Mpa (psi)	35(5.076)

BRAKES

Service Brake

Hydrostatic closed-loop system provides dynamic breaking

Parking Brake

Manually activated, drum mounted on transmission output shaft

REFILL CAPACITIES L (gal)

Fuel Tank

240(63)

Coolant

20(5)

Engine Oil


18(5)

Water Tank

350(92)

Hydraulic Tank

300(79)

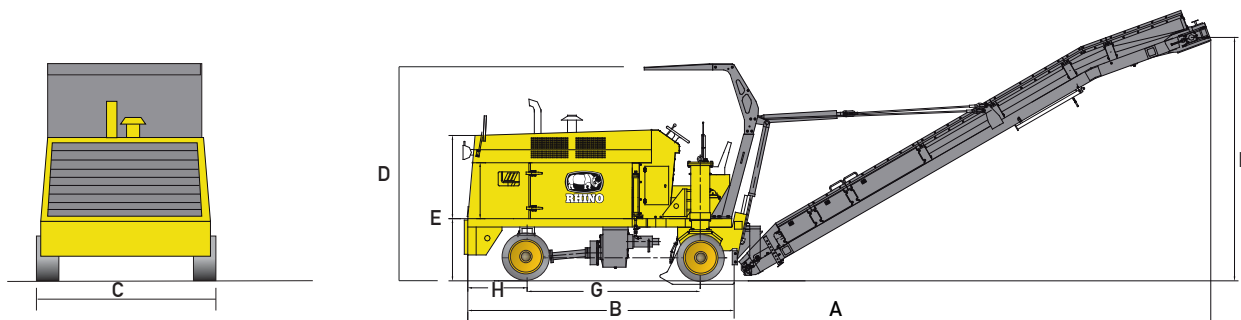

DIMENSIONS

A. Overall Length with Conveyor Up mm (ft)

10,642(34.9)

B. Length Without Conveyor mm (ft)

3,815(12.5)

C. Overall Width mm (ft)

2,325(7.6)

D. Max. Height Canopy Raised mm (ft)

3,100(10.2)

E. Min. Height no Canopy mm (ft)

2,650(8.7)

F. Max. Truck Clearance mm (ft)

3,500(11.5)

G. Wheelbase mm (ft)

2,480(8.1)

H. Front Wheel to Front of Machine mm (ft)

850(2.8)

Shipping Dimensions

Base Machine Length mm (ft)

5,100(16.7)

Base Machine Width mm (ft)

2,430(8.0)

Base Machine Height mm (ft)

3,100(10.2)

Conveyor Length mm (ft)

7,535(24.7)

Conveyor Width mm (ft)

1,000(3.3)

Conveyor Height mm (ft)

780(2.6)

OPERATING WEIGHT

Machine Weight kg(lb)

15,500(34.172)

OPTIONS

Automatic Leveling, 4 Wheel Drive, Fine Milling Rotor, Power Milling Rotor, Tier 3, Tier 4 Engine.

Cold Planer operating information is based on machine with identified linkage and standard equipment, standard tires, full fuel tank, and 79-kg (175 lb) operator. This information is affected by changes in rotor types and different attachments.