





RCP2100T

COLD PLANER



Adopting mechatronics design for automation

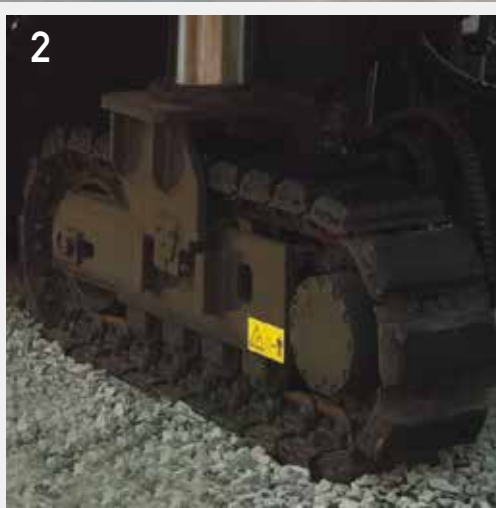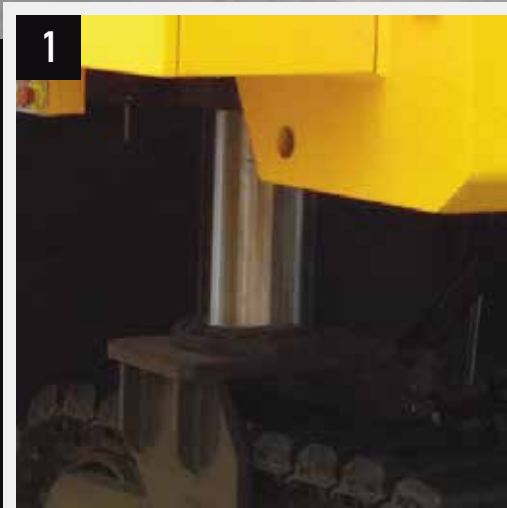

1. Independent elevating control MOBA system with two longitudinal axes and one transverse digital leveling system.
2. Four track drive with 26 track-plates for each track, four independent elevating column of hydraulic cylinders.
3. Two stage front loading, foldable discharge belt conveyor system with independent control switches for both stages on the forward/reverse functions with seamless speed controls. Height of discharge adjustable up to maximum 4,700mm and 40 degree swing to both left and right.

Milling drums and tools are optimized to work efficiently and tackle any job effectively. Easy access doors provide convenient access to operator for drum maintenance and tool replacements.

POWER TRAIN

Engine Make/Model	Cummins QSX15 or Rhino
Net Power kW (Hp) @2,100 rpm	140(188)
Displacement L (cu.In)	8.3(506)
Emission Rating (optional)	Tier2 (Tier3, Tier4)
Fuel System	Direct Injection
Lubrication	Full-flow spin-on filter
Aspiration	Turbocharged
Air Cleaner	Under-hood, dual element dry type
Fan Drive	Belt driven
Electrical System	24 volts with 70 amp alternator, 120 Ah

TRAVEL SPEEDS

Max Travel Speed km/h (mph)	6.0(4)
Drive Type	Tracks
Number of Tracks	4
Track Length mm (in)	1,950(77)
Track Width mm (in)	300(12)
Track Height mm (in)	700(28)

ROTOR	Tools are mounted on quick couples for easy replacement, quick access panels provide easy maintenance for operator, automatic self-leveling through electronic over hydraulic systems
Drive System	Hydraulically activated by operator, heavy-duty clutches mounted directly to the engine, high endurance bells transfer engine power to rotor efficiently and effectively
Milling Speed m/min (in/min)	25(984)
Number of Tools	170
Cutting Width mm (in)	2,100(83)
Cutting Depth mm (in)	320(12.6)
Rotor Diameter mm (in)	1,070(42)
Tool Spacing (tip) mm (in)	15(0.6)
Speed @2,200 rpm	96

CONVEYOR SYSTEM

Type	Hydraulically driven, ergonomic controls provide easy operation for changing speeds and direction
Width mm (in)	800(31)
Max. Feeding Height mm (ft)	4,700(15)
Swing (°)	80(40 each side)

STEERING

Controls on operator's cab, full-hydraulic assistance with four steering modes,
Independent front and rear track steering with self-centering systems,
Simultaneous front-rear steering, lateral-traverse

Min. Turning Radius mm (ft)	6,250(21)
-----------------------------	-----------

WATER SPRAY SYSTEM

Pressurized water spray system ensures dust control and belt lubrication, flat pattern
spray provides better cleaning performance and cooling of tool bits during operation

HYDRAULIC SYSTEM

Hydraulic pumps for driving, conveyor and tools provide the needed performance to
each component, pumps are mounted on engine compartment for easy access

Pump Type	Gear Pump, constant displacement
System Pressure Mpa (psi)	28(4,061)

BRAKES


Service Brake	Hydrostatic closed-loop system provides dynamic breaking
Parking Brake	Manually activated, drum mounted on transmission output shaft

REFILL CAPACITIES L (gal)

Fuel Tank	1,320(349)
Coolant	90(24)
Engine Oil	80(21)
Water Tank	3,500(925)
Hydraulic Tank	300(79)

Cold Planer operating information is based on machine with identified linkage and standard equipment, standard tires, full fuel tank, and 79-kg (175 lb) operator. This information is affected by changes in rotor types and different attachments.

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

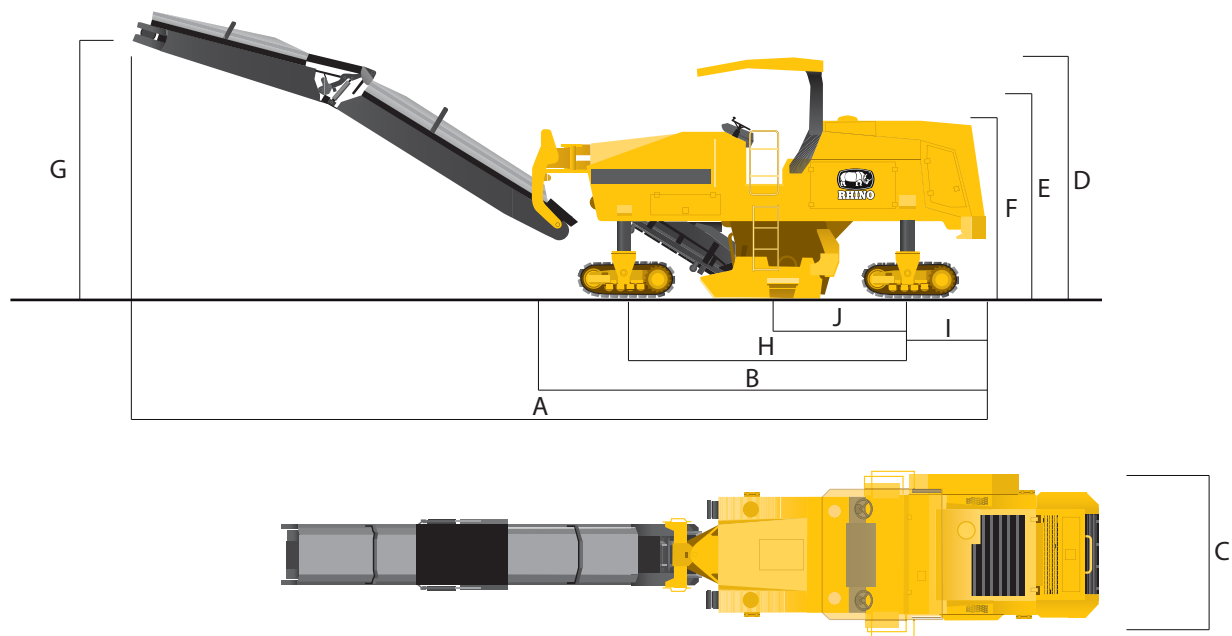

DIMENSIONS

A. Overall Length with Conveyor Up mm (ft)	14,355(47.1)
B. Length Without Conveyor mm (ft)	7,390(24.2)
C. Overall Width mm (ft)	2,840(9.3)
D. Max. Height Canopy Raised mm (ft)	4,120(13.5)
E. Height Canopy Lowered mm (ft)	3,222(10.6)
F. Min. Height no Canopy mm (ft)	3,109(10.2)
G. Max. Truck Clearance mm (ft)	4,700(15.4)
H. From Center Front Track to Center Rear Track mm (ft)	4,750(15.6)
I. Front Center Rear Track to Rear of Machine mm (ft)	1,210(4.0)
J. From Center Rear Track to Center of Rotor mm (ft)	2,100(6.9)
Track Gauge mm (ft)	1,500(4.9)

Shipping Dimensions

Base Machine Length mm (ft)	7,390(24.2)
Base Machine Width mm (ft)	2,680(8.8)
Base Machine Height mm (ft)	3,150(10.3)
Conveyor Length mm (ft)	8,357(27.4)
Conveyor Width mm (ft)	1,030(3.4)
Conveyor Height mm (ft)	792(2.6)

OPERATING WEIGHT

Machine Weight kg(lb)	32,500(71.650)
-----------------------	----------------

OPTIONS

Automatic Leveling, 4 Wheel Drive, Fine Milling Rotor, Power Milling Rotor, Tier 3, Tier 4 Engine.

Cold Planer operating information is based on machine with identified linkage and standard equipment, standard tires, full fuel tank, and 79-kg (175 lb) operator. This information is affected by changes in rotor types and different attachments.

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.