



RCT14H-3

TANDEM VIBRATORY ROLLER



Drum Choices For Productivity.



The Rhino tandem vibratory drums. It excels on a variety of asphalt mix designs as well as other granular materials. It features exceptional visibility and control, smooth operating powertrain, versatile vibratory systems, and the industry leading water spray system.

The Rhino tandem vibratory drums. utilize the latest in sensing technologies with electronic monitoring to optimize compaction; thus, increasing production and making customers more efficient on worksites.

POWER TRAIN	
Engine Make / Model	Cummins 6BTAA5.9 or Rhino
Power kW (Hp) @2,200rpm	110(148)
Displacement L (cu. In)	5,9(360)
Emissions (optional)	Tier 2(Tier 3, Tier 4)
Lubrication	Full-flow spin-on filter
Aspiration	Turbocharged
Air Cleaner	Under-hood, dual element dry type
Fan Drive	Belt driven
Electric System	24 Volts with 70 Amp alternator
OPERATING WEIGHT	
Machine with Cab kg (lb)	14,000(30.865)
Static Linear Load kg/cm (lb/in)	32,9(19)
VIBRATION SYSTEM	
Max. Frequency Hz (vpm)	55(3,300)
Min. Frequency Hz (vpm)	40(2,400)
Nominal Amplitude @ Max. Frequency	
High mm (in)	0,74(0.03)
Low mm (in)	0,35(0.01)
CENTRIFUGAL FORCE	
High kN (lbf)	350(78.683)
Low kN (lbf)	220(49.458)
HYDRAULIC SYSTEM	
Pump Type	Axial piston pump, variable displacement, closed center
Vibration Type	Axial piston motors, constant displacement
System Pressure Mpa (psi)	42(6.092)
Vibration System Pressure Mpa (psi)	14(2.031)
Steering System Pressure Mpa (psi)	10(1.450)
REFILL CAPACITIES L (gal)	
Fuel Tank	250(66)
Engine Oil	15(4)
Hydraulic Tank	195(52)
Water Tank	800(211)

TRANSMISSION

Type Hydrostatic all-drum travel drive by full-hydraulic motors, double reduction for infinite variable speeds

Travel Speed kmh (mph) 13(8)


BRAKE SYSTEM

Service Brakes Hydrostatic dynamic breaking


Parking Brake Electronically activated




Front Steering





Leading Drum Steering



Coordinated Steering



Offset Operation

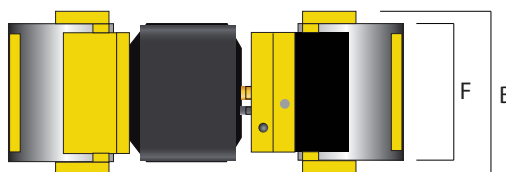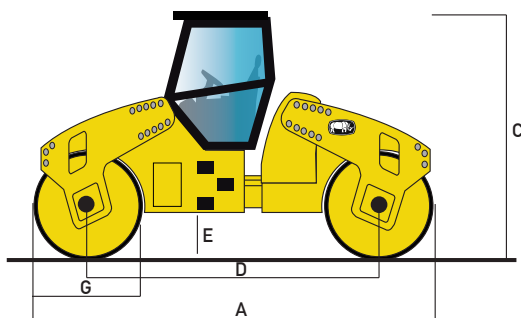

MACHINE DIMENSIONS

A. Overall Width mm (ft) 4,890(16.0)

B. Overall Length mm (ft) 2,240(7.3)

C. Max. Machine Height mm (ft) 3,120(10.2)

D. Wheelbase mm (ft) 3,590(11.8)

E. Ground Clearance mm (ft) 350(1.1)

Outside Turning Radius mm (ft) 7,000(23.0)

Inside Turning Radius mm (ft) 5,800(19.0)

Articulation Angle (°) 35

Gradeability (°) 23

DRUM DIMENSIONS

F. Drum Width mm (ft) 2,130(83.9)

Drum Shell Thickness mm (in) 25(1.0)

G. Drum Diameter mm (in) 1,300(51.2)

