




# **RCT80H**

**TANDEM VIBRATORY ROLLER**





# Drum Choices For Productivity.

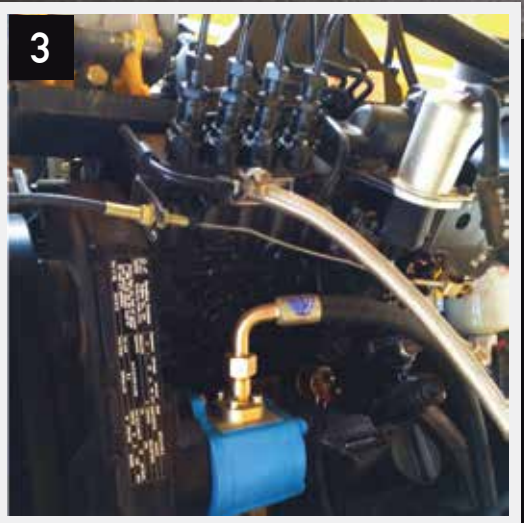

Rhino Double Drum Compactors are manufactured with the highest standards of quality and are suitable for compacting a wide variety of materials like stabilized soil, bituminous concrete, rolling cement concrete (RCC), and many more. These compactors are widely used for huge paving projects like highways, airport runways, dams, municipal roads, industrial grounds, and more...

1. The ergonomic, automotive style operator station helps you work comfortably and productively all day long.
2. Easy-to-read, high-visibility gauges and warning lamps keep the operator aware of critical system information.
3. Reliable and durable Cummins diesel engine, more efficient with low maintenance costs.

|                                     |                                                         |
|-------------------------------------|---------------------------------------------------------|
| <b>POWER TRAIN</b>                  |                                                         |
| Engine Make / Model                 | Cummins 4BTA3.9 or Rhino                                |
| Power kW (Hp) @2,200rpm             | 93(125)                                                 |
| Displacement L (cu. In)             | 3,9(238)                                                |
| Emissions (optional)                | Tier 2(Tier 3, Tier 4)                                  |
| Lubrication                         | Full-flow spin-on filter                                |
| Aspiration                          | Turbocharged                                            |
| Air Cleaner                         | Under-hood, dual element dry type                       |
| Fan Drive                           | Belt driven                                             |
| Electric System                     | 24 Volts with 70 Amp alternator                         |
| <b>OPERATING WEIGHT</b>             |                                                         |
| Machine with Cab kg (lb)            | 8,000(17,637)                                           |
| Static Linear Load kg/cm (lb/in)    | 21.0(12)                                                |
| <b>VIBRATION SYSTEM</b>             |                                                         |
| Max. Frequency Hz (vpm)             | 50(3,000)                                               |
| Min. Frequency Hz (vpm)             | 40(2,400)                                               |
| Nominal Amplitude @ Max. Frequency  |                                                         |
| High mm (in)                        | 0,67(0.03)                                              |
| Low mm (in)                         | 0,35(0.01)                                              |
| <b>CENTRIFUGAL FORCE</b>            |                                                         |
| High kN (lbf)                       | 180(40,466)                                             |
| Low kN (lbf)                        | 138(31,024)                                             |
| <b>HYDRAULIC SYSTEM</b>             |                                                         |
| Pump Type                           | Axial piston pump, variable displacement, closed center |
| Vibration Type                      | Axial piston motors, constant displacement              |
| System Pressure Mpa (psi)           | 37(5,366)                                               |
| Vibration System Pressure Mpa (psi) | 12(1,740)                                               |
| Steering System Pressure Mpa (psi)  | 10(1,450)                                               |
| <b>REFILL CAPACITIES L (gal)</b>    |                                                         |
| Fuel Tank                           | 200(53)                                                 |
| Engine Oil                          | 11(3)                                                   |
| Hydraulic Tank                      | 180(48)                                                 |
| Water Tank                          | 750(198)                                                |

## TRANSMISSION


Type     Hydrostatic all-drum travel drive by full-hydraulic motors, double reduction for infinite variable speeds

Travel Speed kmh (mph)     12(7)

## BRAKE SYSTEM

Service Brakes     Hydrostatic dynamic breaking

Parking Brake     Manually activated

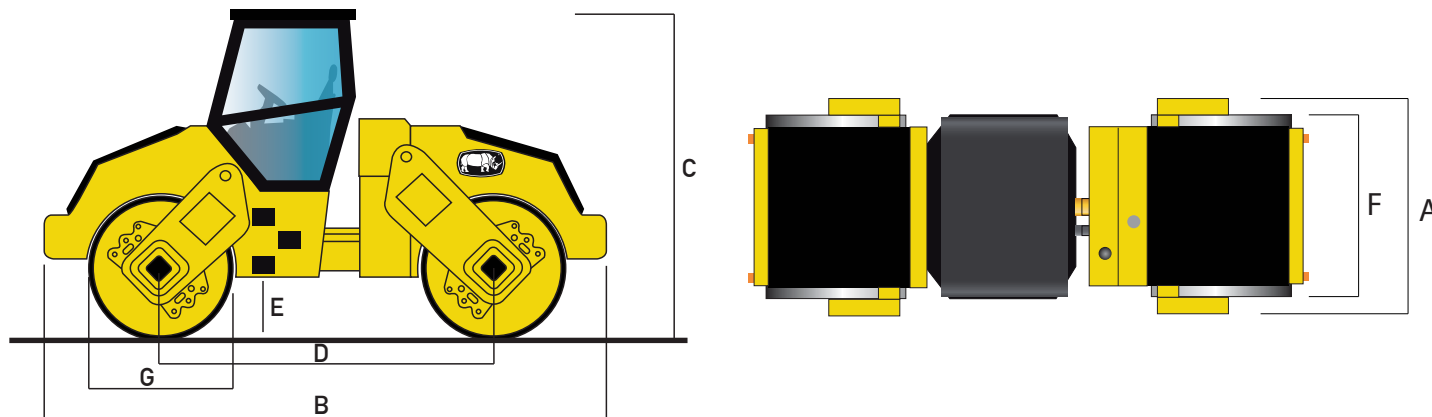

## MACHINE DIMENSIONS

A. Overall Width mm (ft)     2,160(7.1)

B. Overall Length mm (ft)     5,080(16.7)

C. Max. Machine Height mm (ft)     2,850(9.4)

D. Wheelbase mm (ft)     3,340(11.0)

E. Ground Clearance mm (ft)     300(1.0)

Outside Turning Radius mm (ft)     7,000(23.0)

Inside Turning Radius mm (ft)     5,800(19.0)

Articulation Angle (°)     35

Gradeability (°)     23

## DRUM DIMENSIONS

F. Drum Width mm (ft)     1,870(73.6)

Drum Shell Thickness mm (in)     25(1.0)

G. Drum Diameter mm (in)     1,150(45.3)

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.