



RD36

BULLDOZER



Best-in-class access to service and maintenance points for maximum uptime



Rhino Dozers combine incredible versatility to handle a wide range of jobs with innovations that help you do those jobs better, faster and more efficiently. These crawler dozers are ideal for residential construction performing such tasks as clearing and grading lots, sloping the sides of roads, back-filling, and final grade work for landscaping and driveway construction.



1. Standard high-back seat and lower cushion adjust multiple ways for daylong comfort and support.
2. Easy-to-read, high-visibility gauges and warning lamps keep the operator aware of critical system information.
3. Speed travel can also be varied to fit specific applications, terrain conditions, or operating preferences.

ENGINE		
Make / Engine Model		Cummins / NTA855-C360 or Rhino
Emission Rating		Tier 2 (Tier 3, Tier 4)
Cylinders		6
Displacement L (cu.In)		14(854)
Net Power kW (Hp) @2,200 rpm		257(345)
Net Peak Torque Nm (lb.ft) @ 1,780 rpm		1,423(1.050)
Fuel System		Direct Injection
Aspiration		Turbocharged, charge air cooled
Air Cleaner	Under hood , dual element dry type, restriction indicator on filter housing for service	
COOLING		
Fan Drive / Optional		Belt Driven / Hydraulic reversible
TRANSMISSION		
Type	Powershift, Hydrostatic, planetary gear and multiple disc clutch, hydraulically actuated;	
	tracks are moved by a central spiral-bevel gear to provide instant power;	
	gear selection lever with linkage mechanism;	
	engine speed lever and decelerator pedal to control ground speed	
System Pressure Mpa (psi)		2(290)
Maximum Travel Speeds		Forward Reverse
1st Gear km/h (mph)		4(2) 4(3)
2nd Gear km/h (mph)		7(4) 8(5)
3rd Gear km/h (mph)		12(7) 14(8)
Steering		Individual levers to control each track to provide precision steering;
	Steering clutch provides immediate response to the operator	
Final Drive	Double reduction final drives mounted enclosed and isolated to protect them from shocks and debris	
Drawbar Pull kN (lb)		
Maximum / Optional		360(80.931) / 636(142.979)
Service Brake		Dynamic braking when decelerator pedal is actuated; brake pedal actuation,
	hydraulically activated drums on each track for instant stop and reliability.	
Parking Brake		Manually activated

HYDRAULICS

Type	Gear Pump
Pressure Mpa (psi)	14(2,031)
Max. Flow L/min (gpm)	355(94)
Control	Lever control for blade with float mode: lever control for ripper

ELECTRICAL

Battery	24 volts
Alternator Rating / Optional	50A / 75A
Lights	2 Front Lights, 2 Rear Lights

UNDERCARRIAGE



Track Gauge mm (in)	2,140(84.3)
Grouser Width mm (in) / Optional	560(22.0) / 620(24.7)
Chain	Sealed and lubricated
Shoes, Each Side	41
Track Rollers, Each Side	7
Track Length on Ground mm (in)	3,160(124.4)
Ground Contact Area cm2 (sq.in)	35,392(5.486)
Ground Pressure Kpa (psi)	0.11(16.09)
Track Pitch mm (in)	229(9.0)
Operator Station	ROPS and FOPS

REFILL CAPACITIES

Fuel Tank / Optional	600(159)
Cooling System	121(32)
Engine Oil	47(12)
Transmission Fluid	185(49)
Hydraulic Tank	164(43)
Final Drive Case (for both)	136(36)

OPERATING WEIGHTS

Base Weight / Optional	35,750(78.815) - 35,900(79.146)
Weight with 3-Shank Ripper kg (lb)	40,946(90.270) - 40,960(90.301)

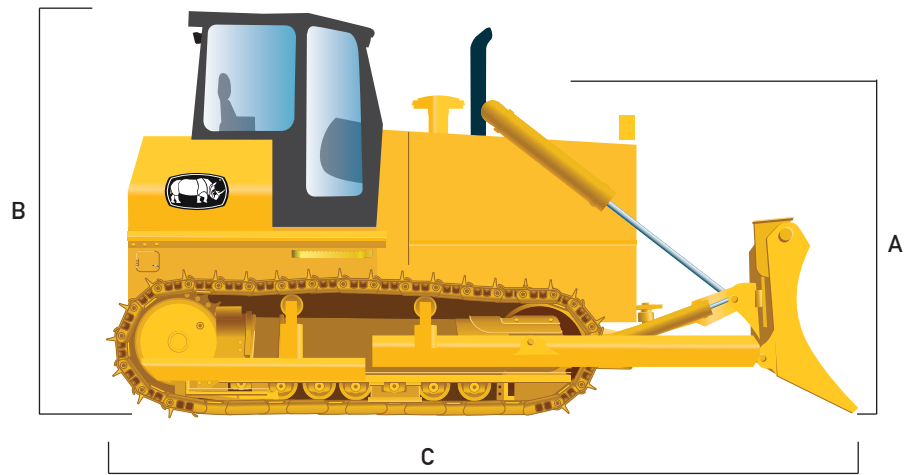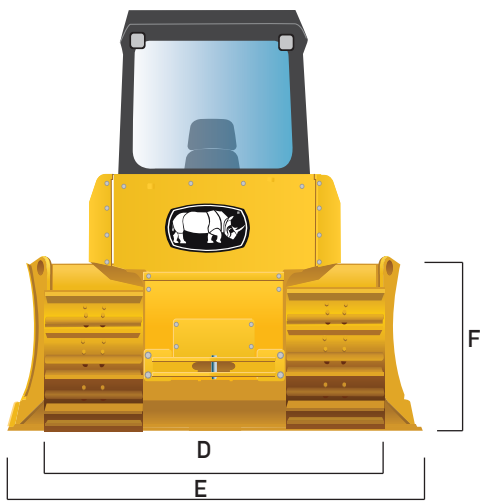

MACHINE DIMENSIONS

Blade Type	Angle	Straight-tilt
A. Overall Height to Top of Exhaust mm (ft)	2,680(8.8)	2,680(8.8)
B. Height to Top of Cab mm (ft)	3,640(11.9)	3,640(11.9)
C. Overall Length mm (ft)	6,880(22.6)	6,880(22.6)
D. Width Over Track mm (ft)	2,810(9.2)	2,810(9.2)
E. Blade Width mm (ft)	4,850(15.9)	4,130(13.5)
F. Blade Height	1,530(5.0)	1,590(5.2)
Tread Depth with Single-Bar Grouser mm (in)	80(3.1)	80(3.1)
Ground Clearance in Dirt mm (in)	404(15.9)	404(15.9)
Length With Ripper mm (ft)	8,560(28.1)	8,560(28.1)
Blade Lift Height mm (in)	1,590(62.6)	1,560(61.4)
Blade Digging Depth mm (in)	600(23.6)	600(23.6)
Blade Cutting-Edge Angle (°)	55	55
Blade Capacity m3 (cu. Yd)	8,2(10.7)	9,3(12.2)
Blade Angle (°)	25	—
Blade Tilt mm (in)	1,000(39.4)	1,000(39.4)
Minimum Turning Radius mm (ft)	3,760(12.3)	3,100 (10.2)
Gradeability (°)	30	30

RIPPER

Single or Multi-shank (3) parallelogram ripper with hydraulic pitch adjustment and replaceable tips


Weight kg (lb)	5,060(11.155)
Max. Penetration mm (in)	835(32.9)
Max. Clearance Under Tip mm (in)	890(35.0)
Overall Length Lowered Position mm (in)	1,680(66.1)
Slope Angle (full raise) (°)	24

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

BLADES



Angle Blade

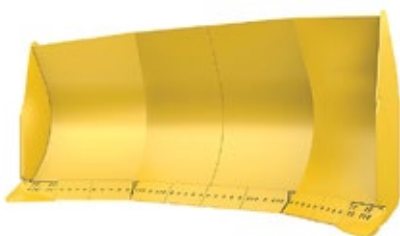


U Blade



Semi U Blade



Straight Blade

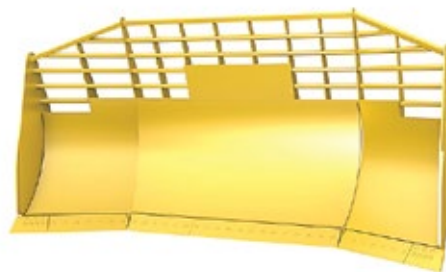

Waste Blade



1 shank ripper

3 shank ripper

Rippers

The attachments shown are for reference only; the final product may be different from the images shown.

For more options contact your nearest dealer.

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.