

Êµ¼Ê×ßÿß¿í¶È²Î¿¼15011



GPS_AVDD18	20mA£°10mil
WB_AVDD18	50mA£°12mil
VCN18_PMU	80mA£°15mil
VCN33_PMU	300mA£°25mil
VCN28_PMU	20mA£°10mil


IQİß³É¶Ô°üμø£¬£"7£¬40£©mm


VCN33ĐỀÒª 20mil; í£¬³α; í±ÈĐ; ÓÚ310£¬¹ŷ; ×Á½, öÒÔÊİ


VCN33DèÒª º´ÕÕ300mA PeakµçÁ÷À´ÆÀ¹À

VCN33μçÔ´ ç í ¶ È² » Âú×ãÒª ÇÓ» áμ¼ÖÂWIFI TX POWER² » x¼or EVM¶ñ»

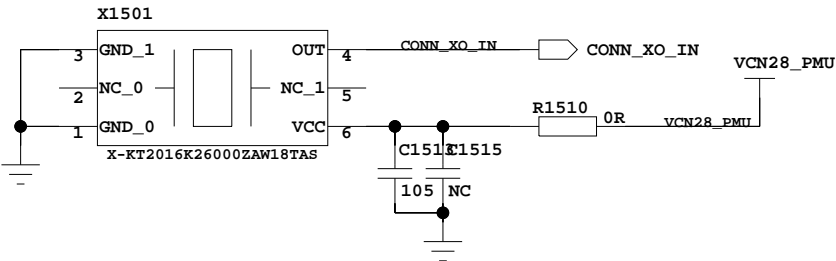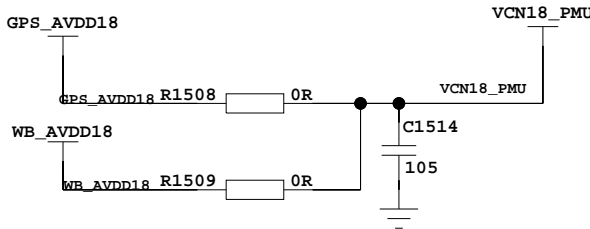
$${}^3_4\mathfrak{S}\tilde{\mathfrak{O}}\tilde{\mathfrak{n}}^3_4\rangle\rangle\mathfrak{c}\tilde{\mathfrak{O}}^2\hat{\mathfrak{I}}\mathfrak{c}^1_4150$$

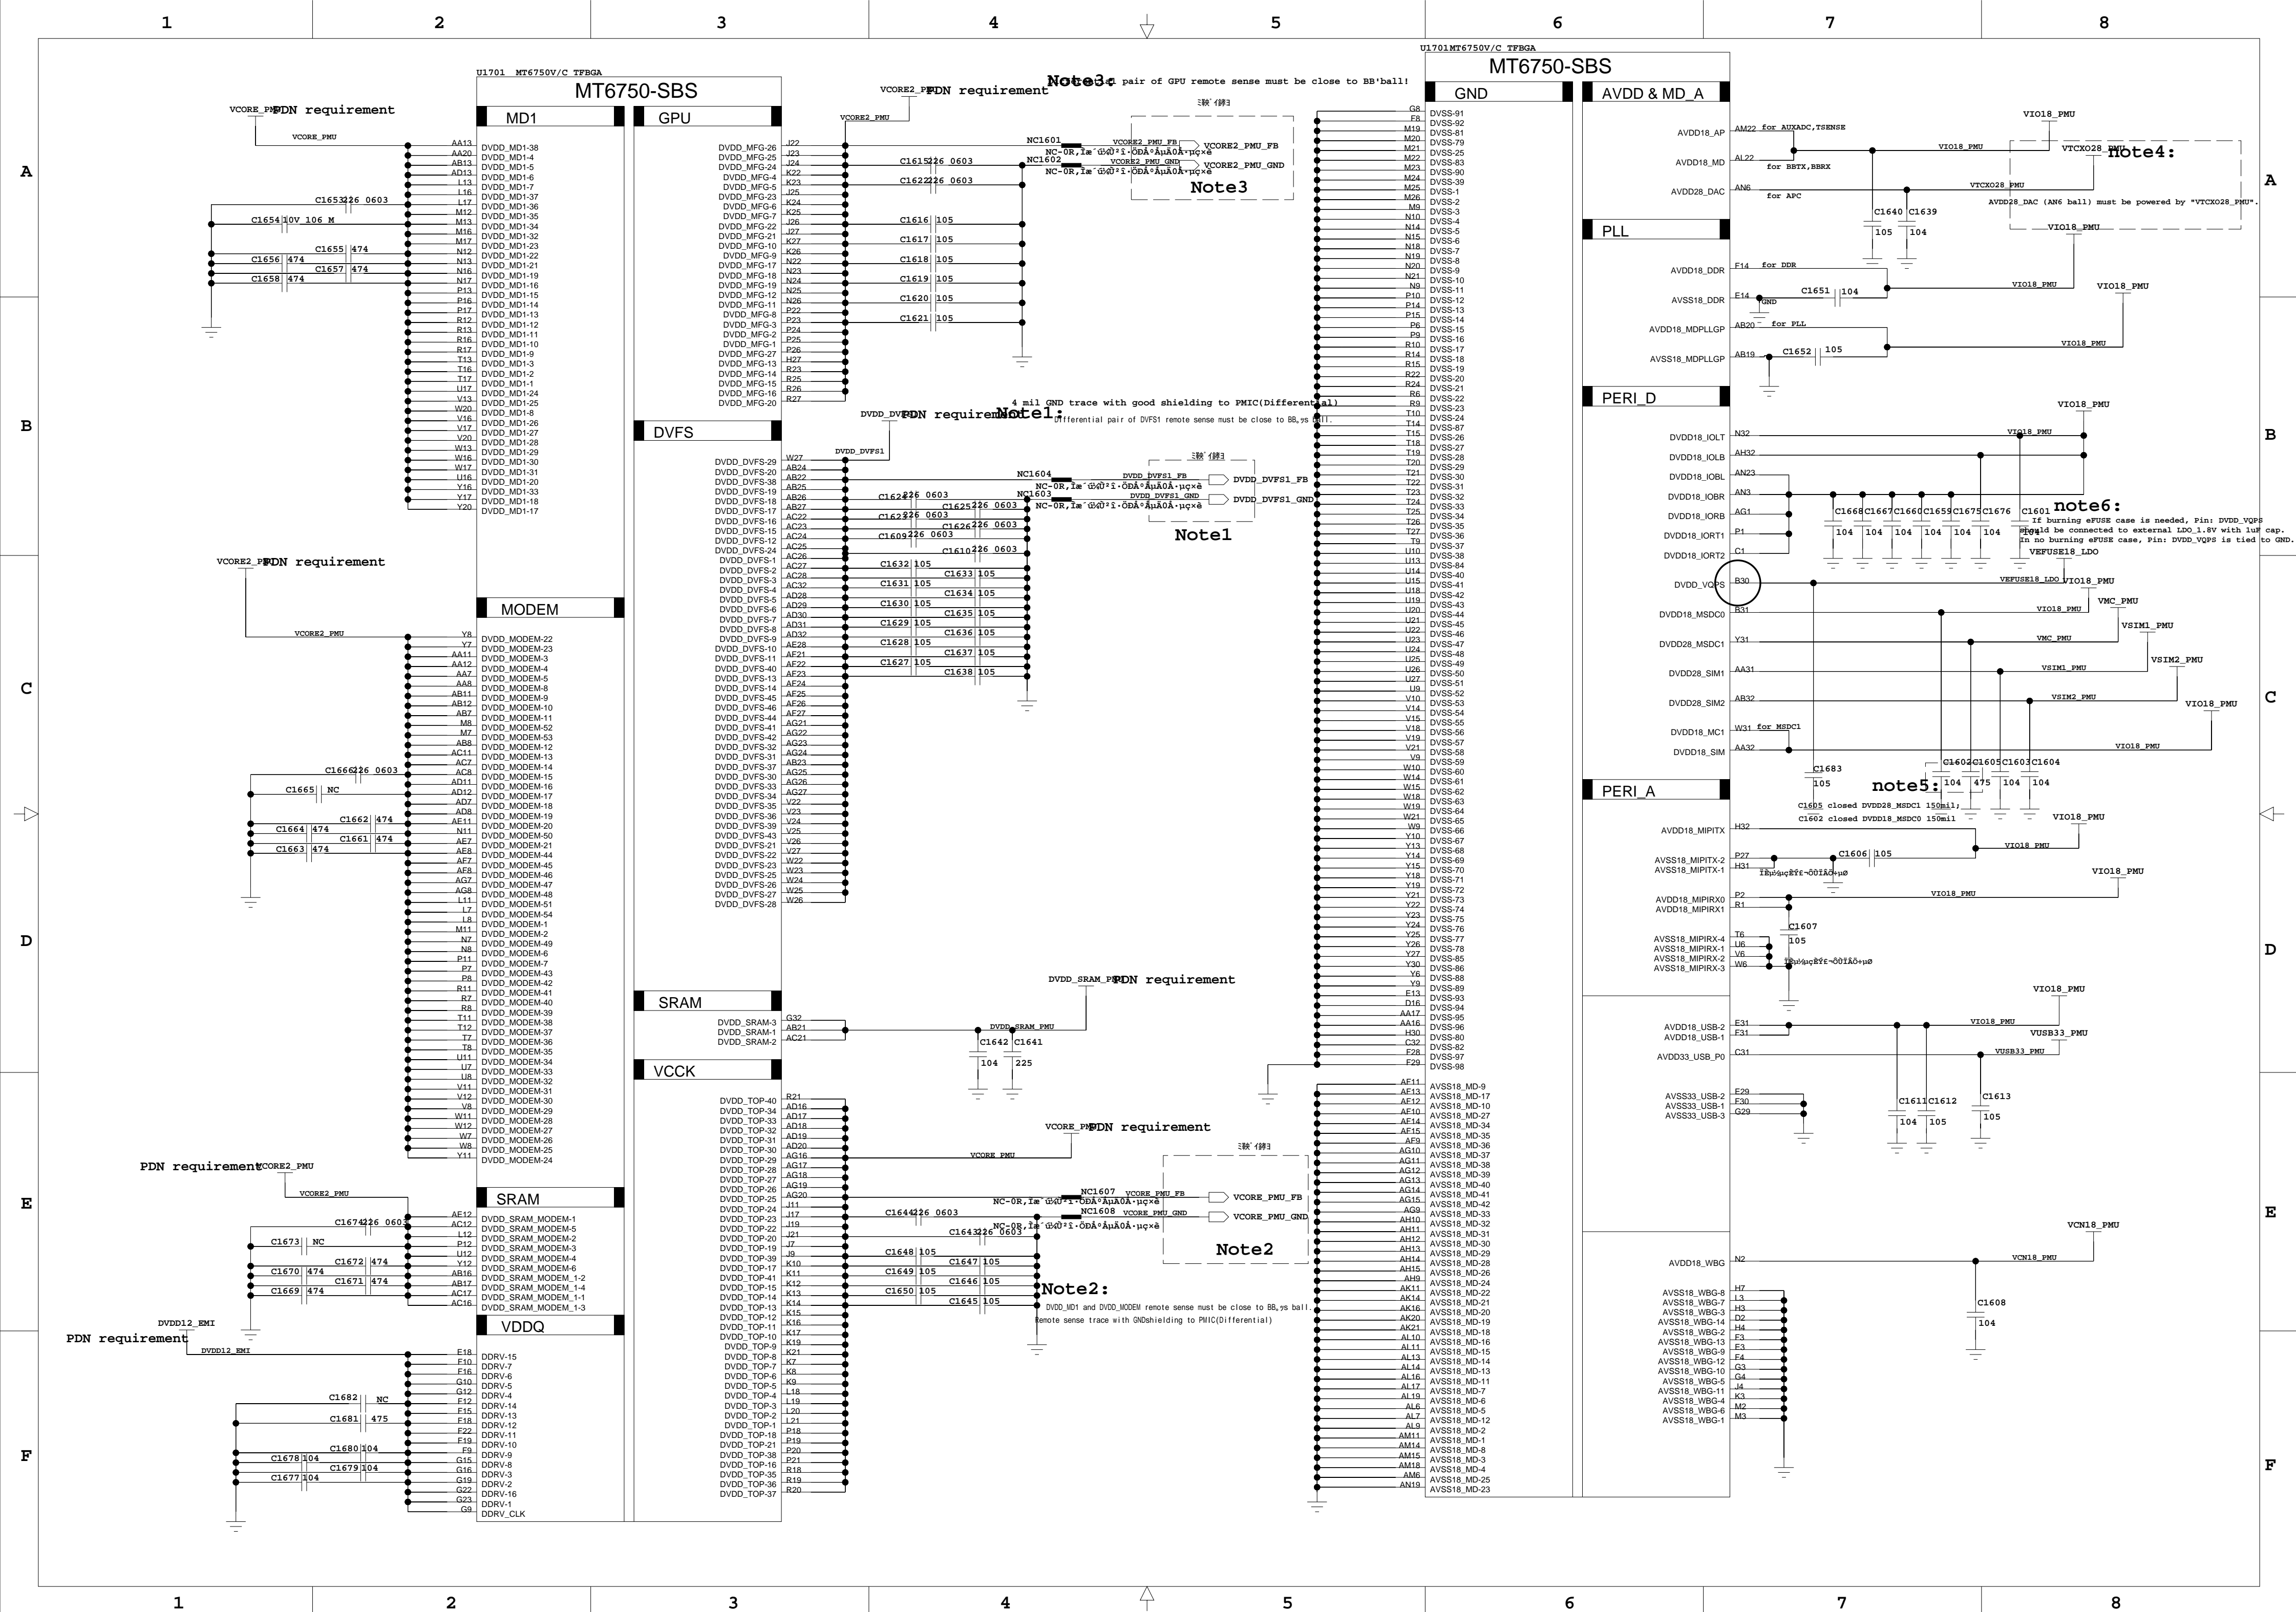

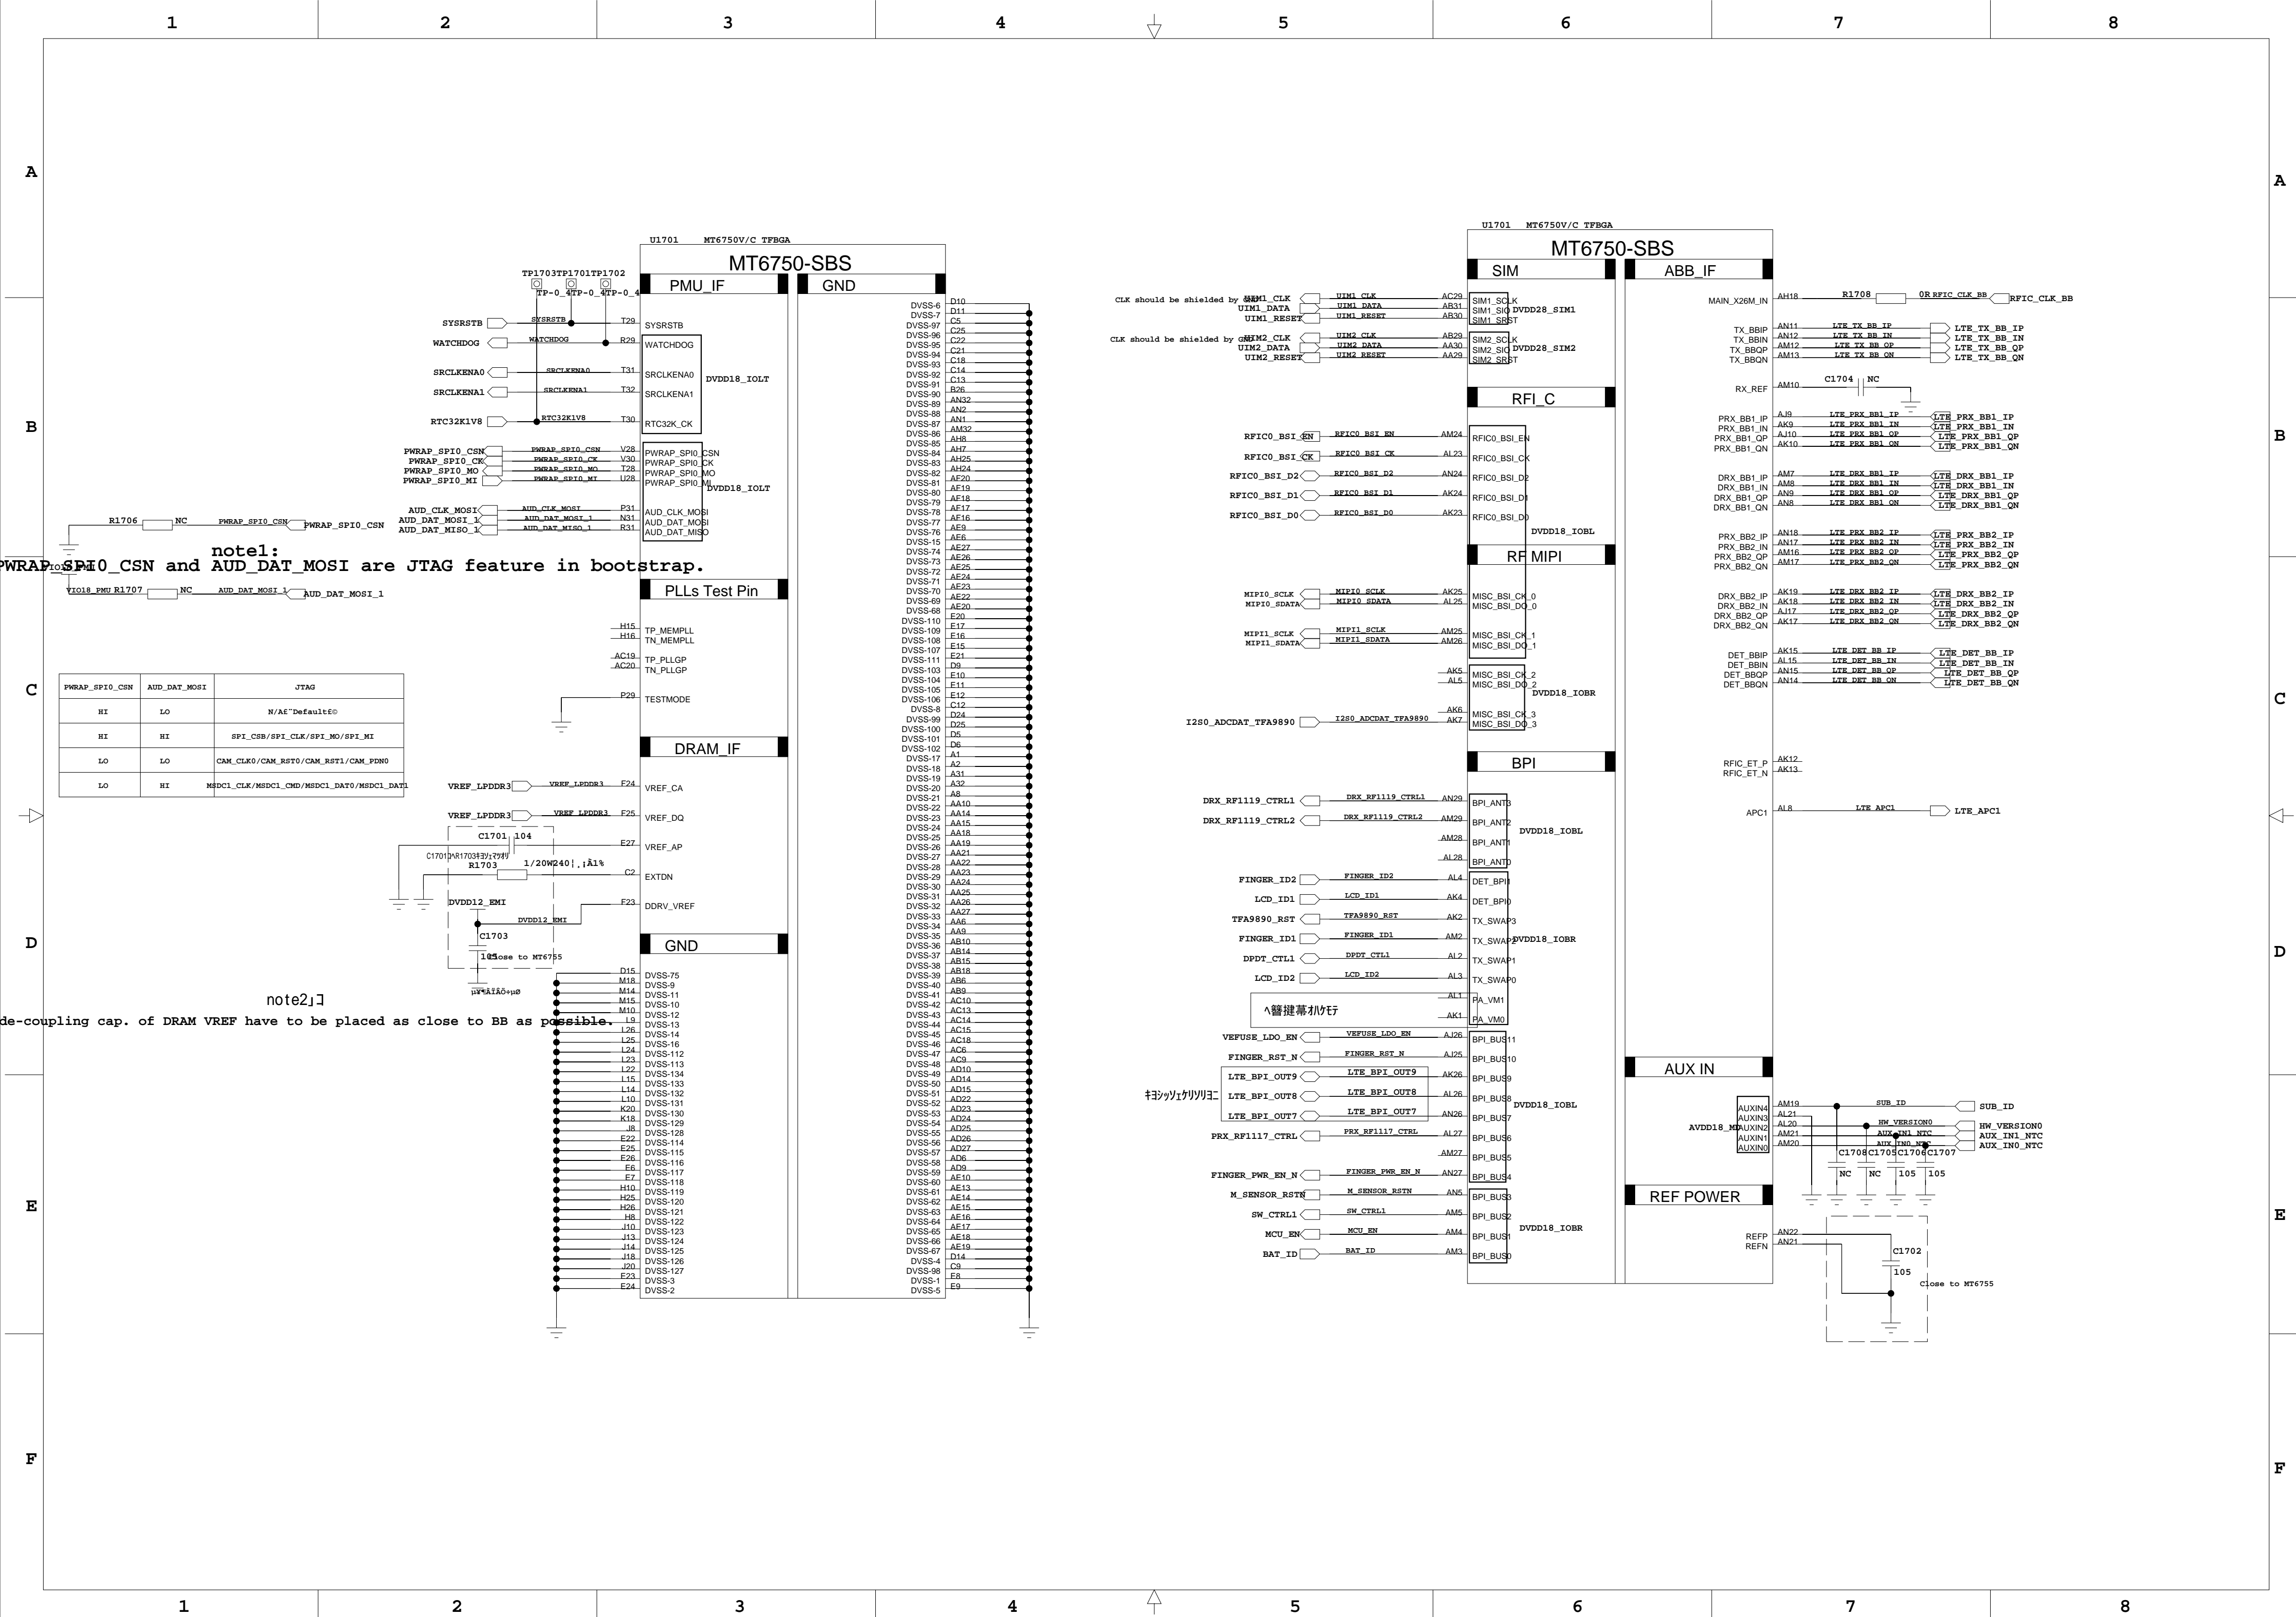

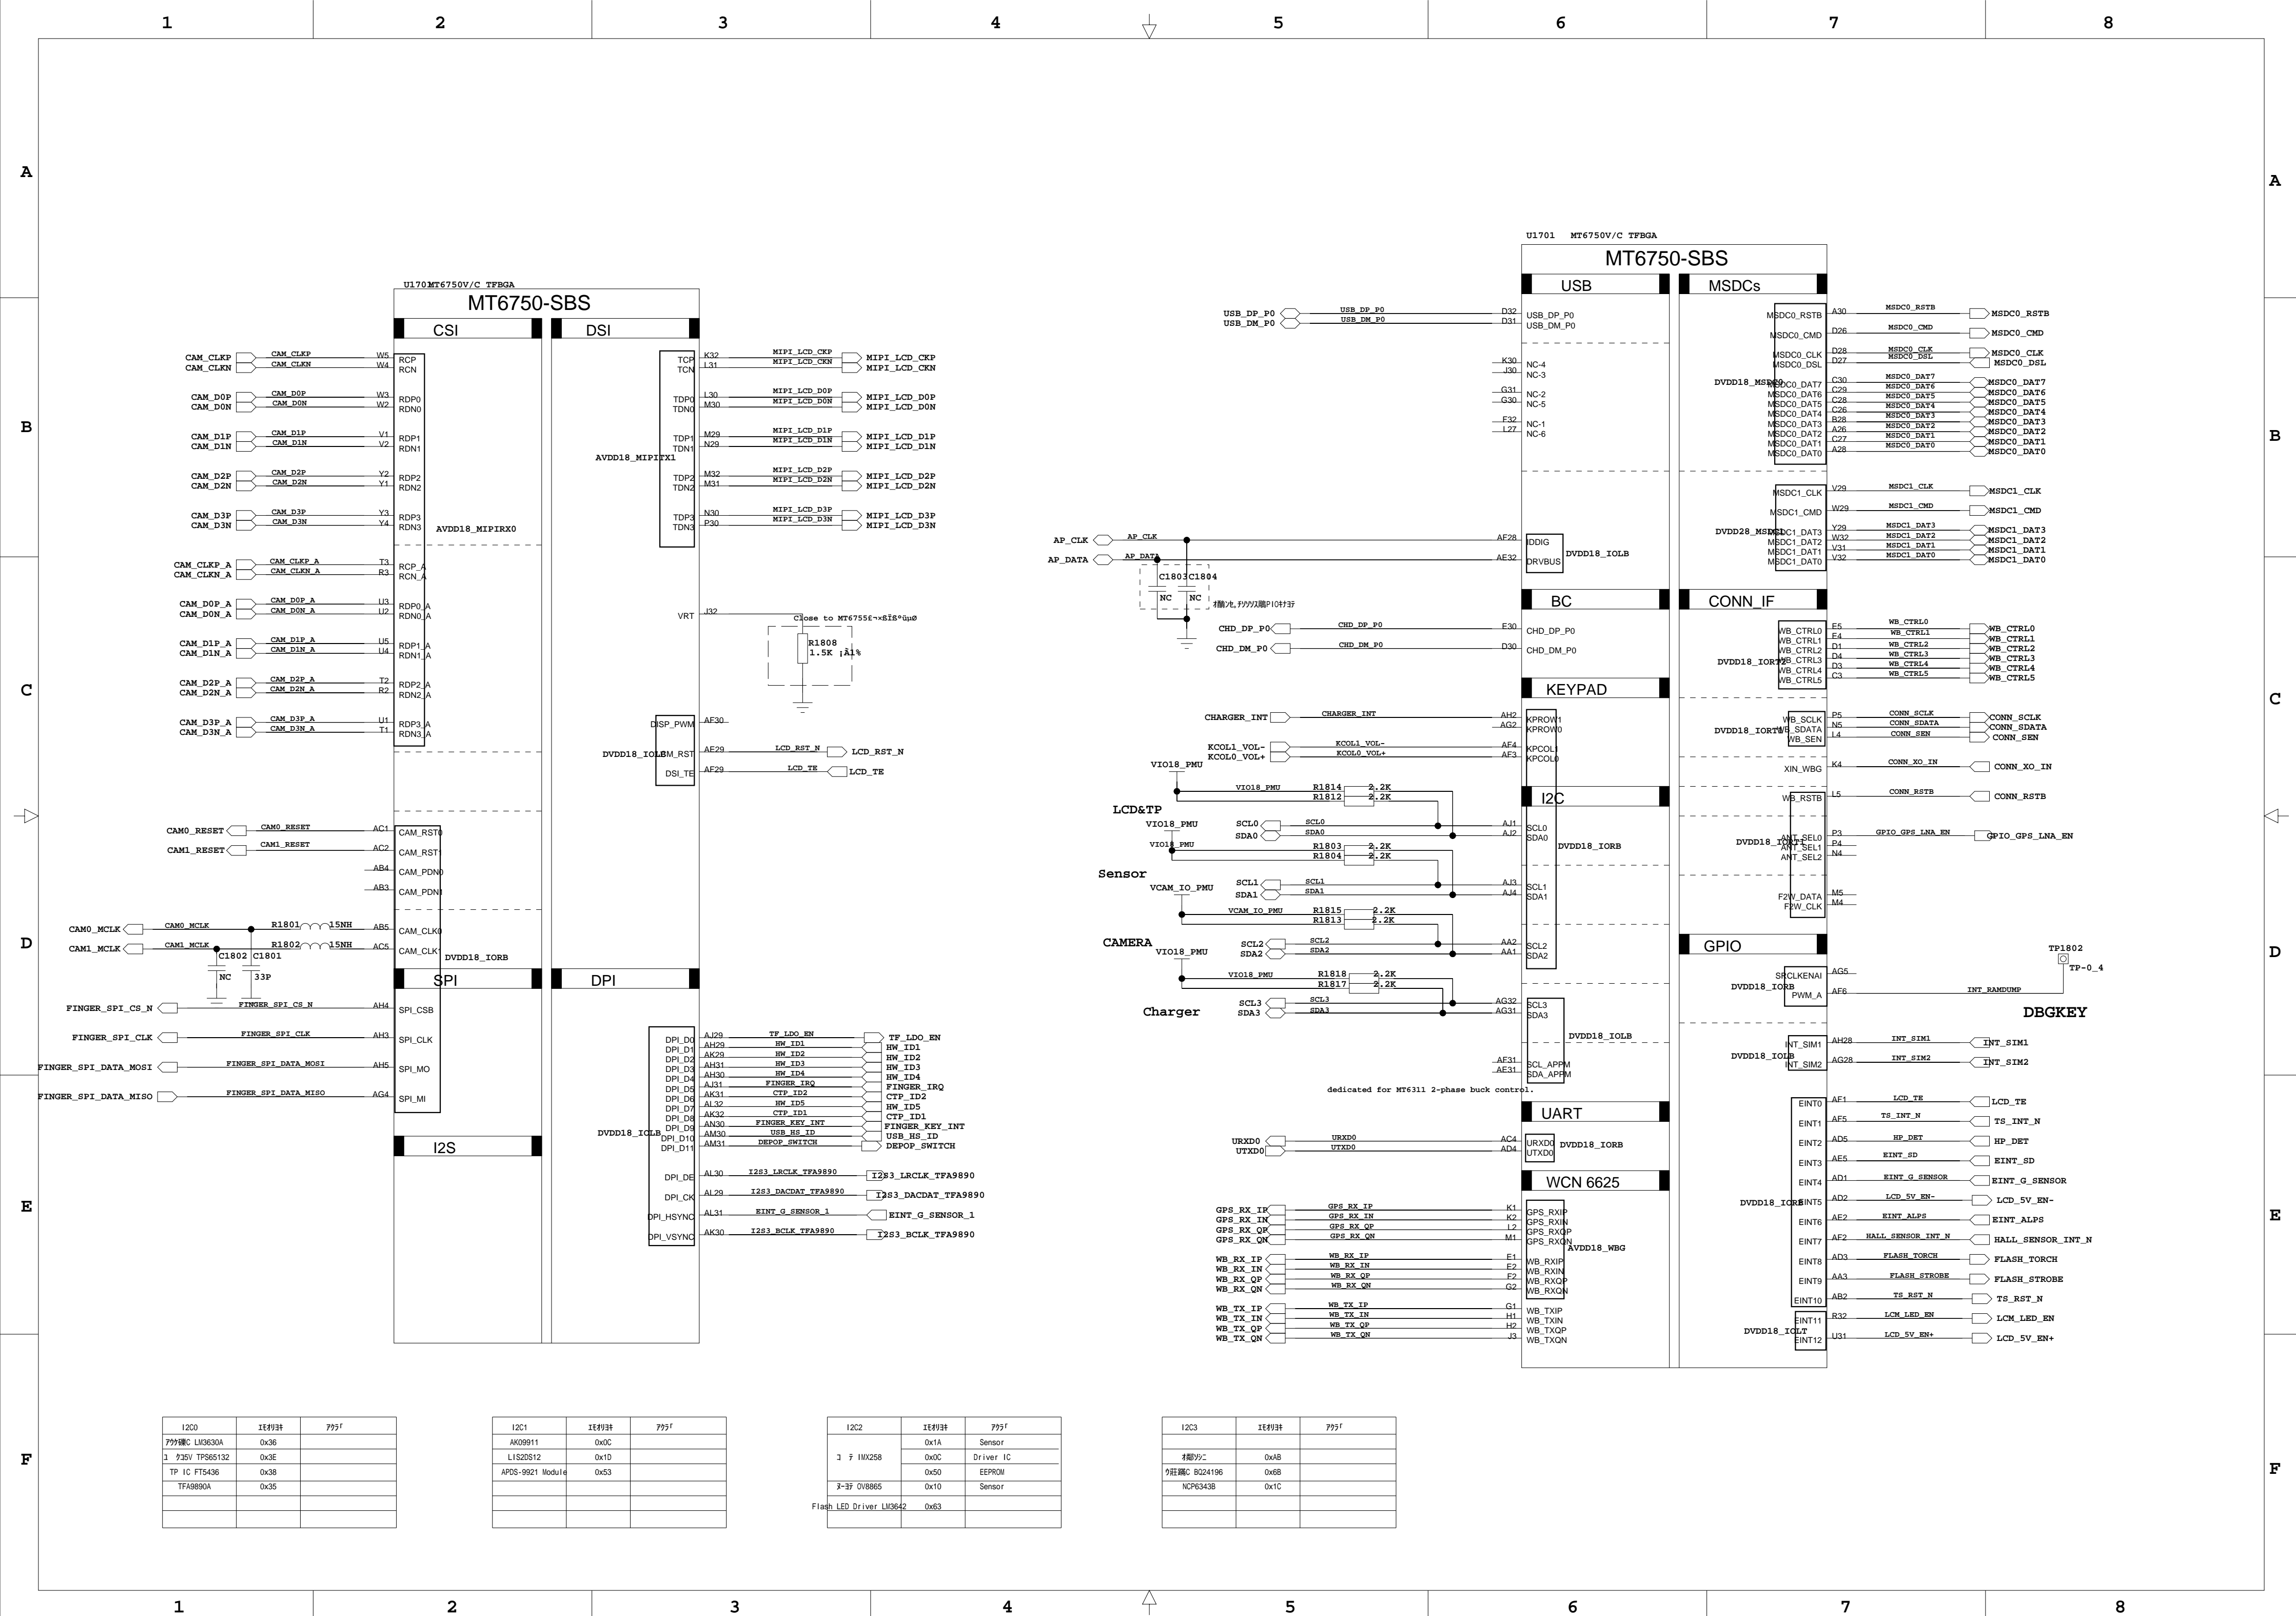

A

ウ莊	HW_ID1
キヌノチ	1
ノチ	0

ヨニハス	HW_ID2	HW_ID3	
メニカッネオハ イ	0	0	
オ醜ナネオハ イ	0	1	
メニカッ3ト」ケオソエ	1	0	
メニカッ5ト」カイヨニ	1	1	


ヤ、チ 幕オPAシ貶シ	HW_ID4
オアヌ=PAキス=ク	0
シ貶シPAキス=ク	1

BAND7	HW_ID5
ラ	0
イラ	1

A

B


GPIOPナ葦ヲ波 ツツ

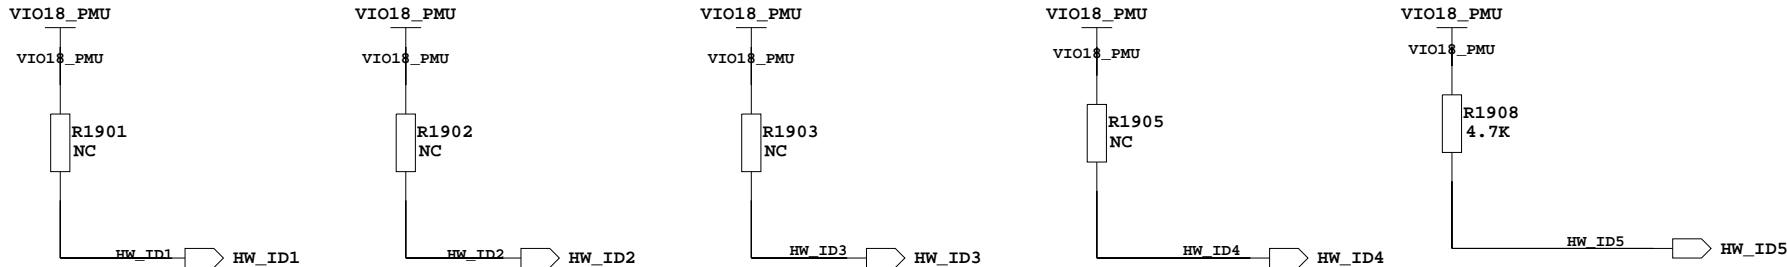

B


C

ラ OMハアラ「メ釜ヤメiNCイハヤオヲ釋

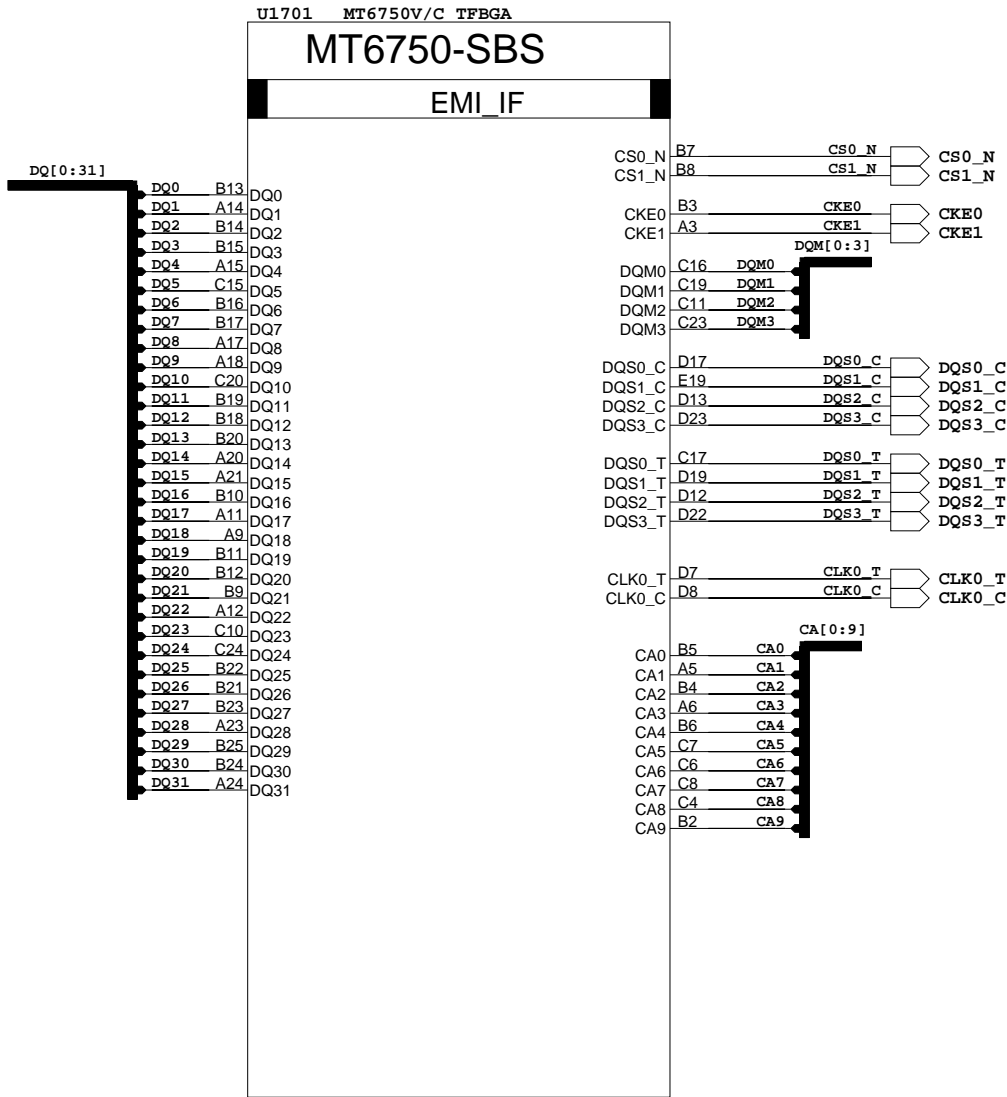

C


D

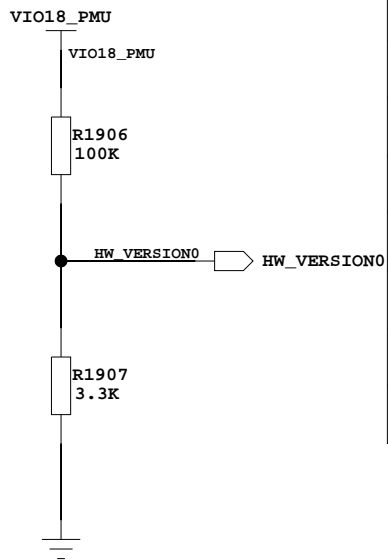

ヨ 蟻豎セ	R1907	セオナ	min(V)	typ(V)	max(V)	R1907ヲマコナ
V1.0	3.3k	5%	0.0491	0.0575	0.0669	8241075
V1.1	4.7k	5%	0.0693	0.0808	0.0937	8241044
V1.2	10k	5%	0.1414	0.1636	0.1885	8241005
V1.3	15k	5%	0.2039	0.2348	0.2691	8241082
V1.4	27k	5%	0.3353	0.3827	0.4347	8241019
V1.5	47k	5%	0.5098	0.5755	0.6465	8241091
V1.6	68k	5%	0.6509	0.7286	0.8113	8241094

D

E

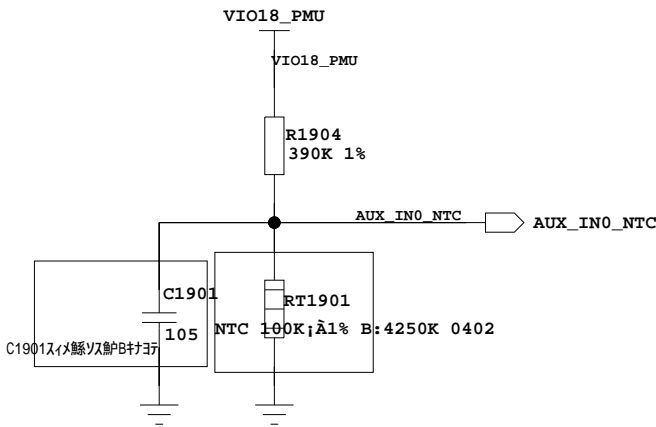

E

Distance to AP is 5-7mm and away form other heat resource 10-12mm

F

A

CD**E**


B



D



F

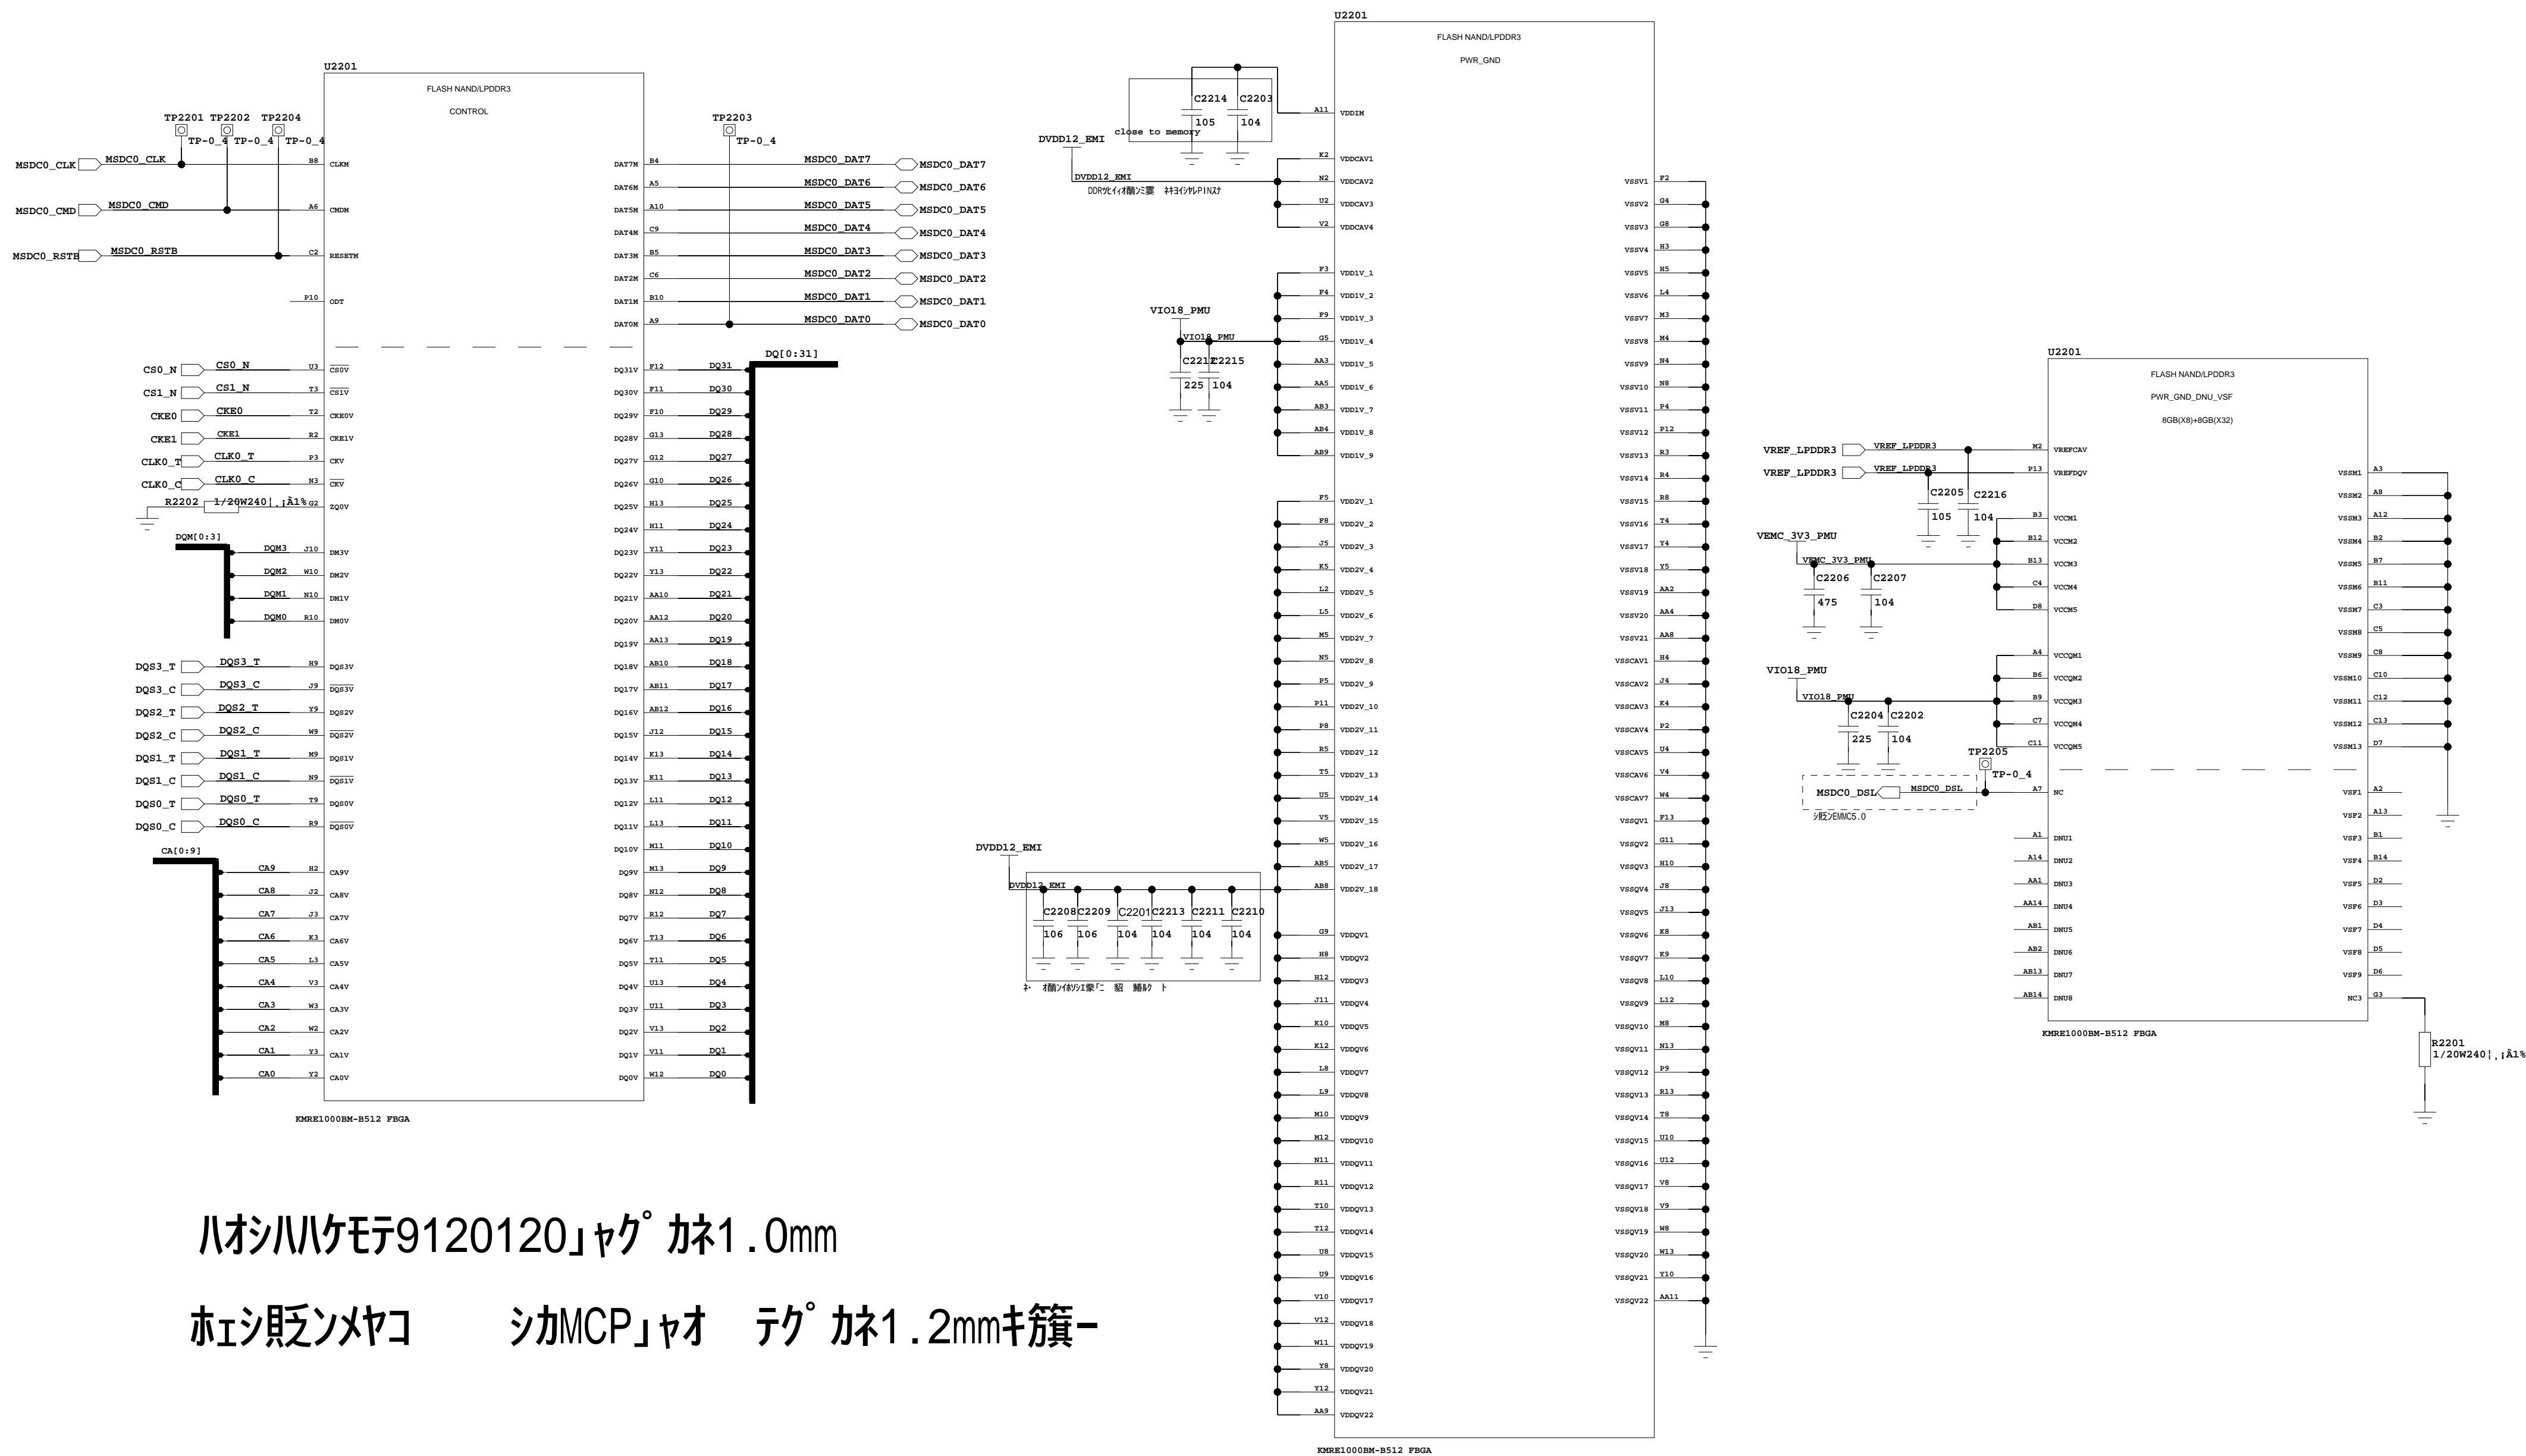


F

**F**

```
tps65132 slave address 0X3E
```


G-Sensor

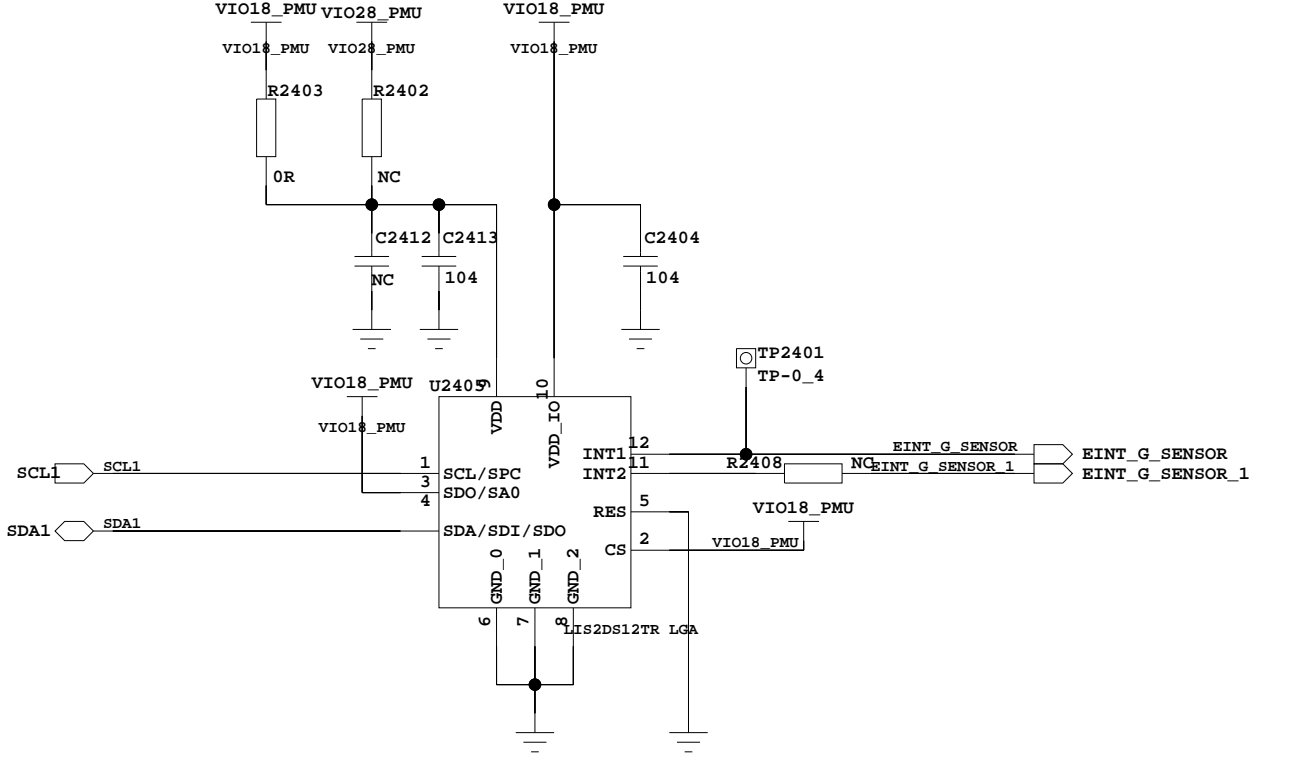

I2C slave Address is 0x1D


SA0	slave ADDR
0	0x1E
1(VDD)	0x1D

A.L.S.+P.S sensor

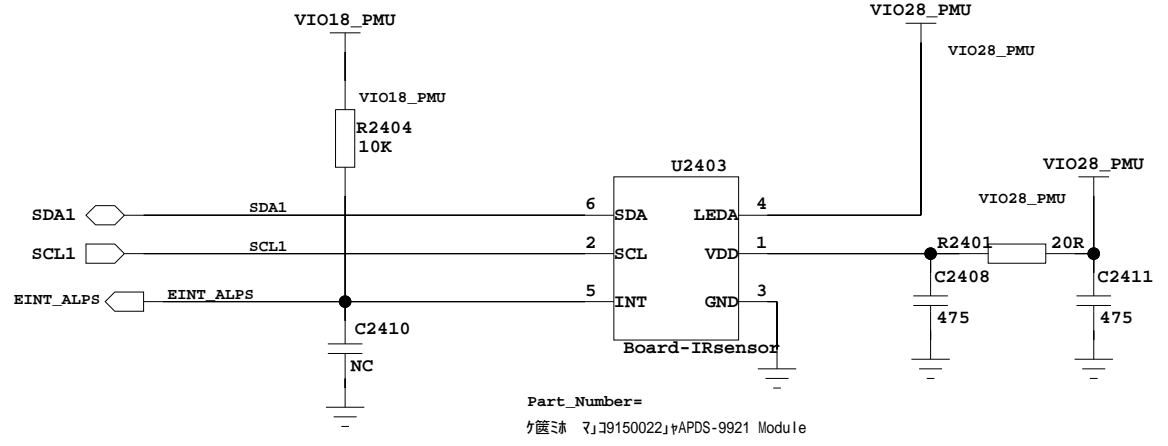


APDS9921 slave Address is 0x53

Hall sensor

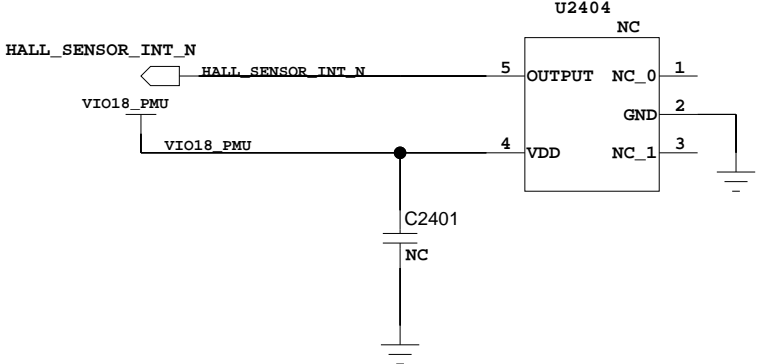


M Sensor

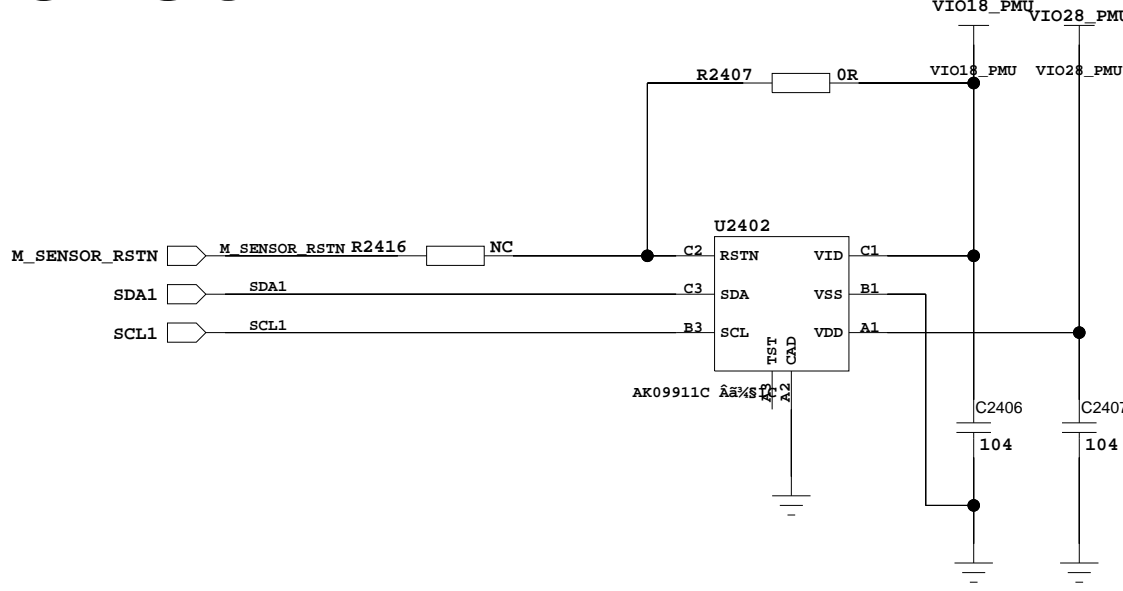


AK09911 slave Address is 0x0C

CAD	slave ADDR
0	0x0C
1(VDD)	0x0D


SIM1 Card

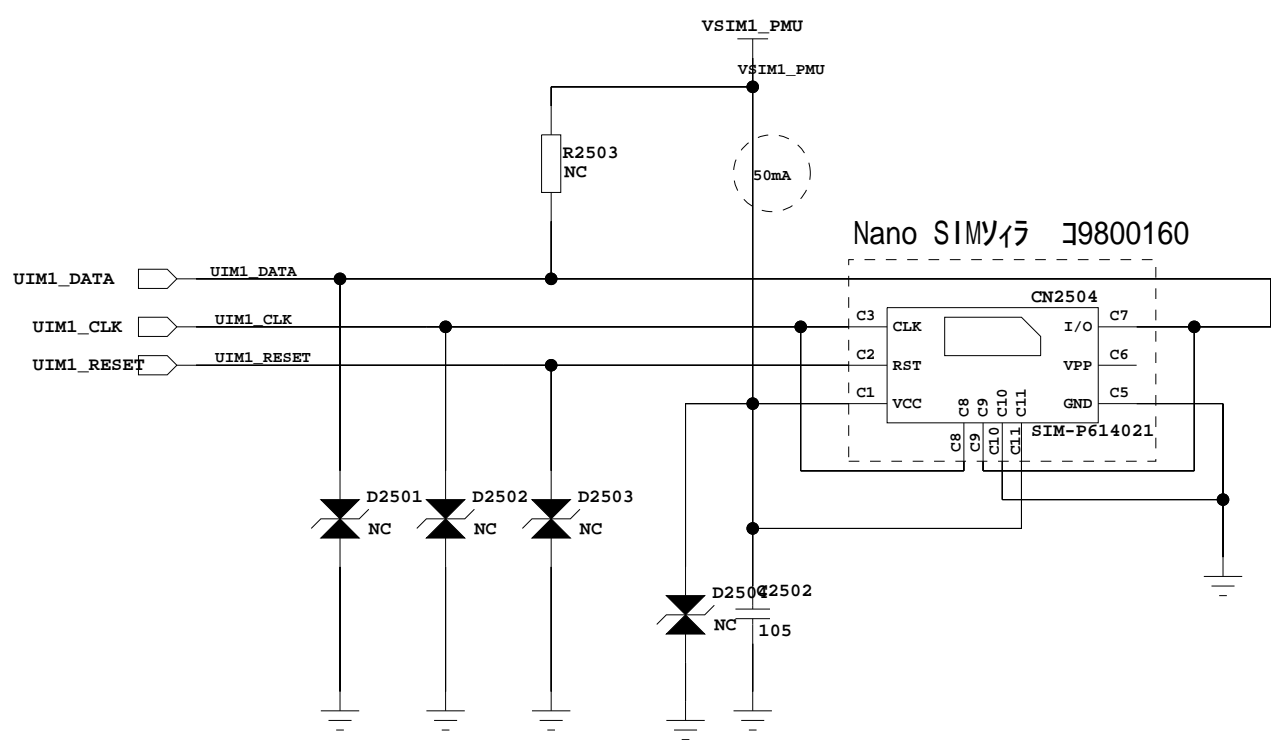


SIM2 Card

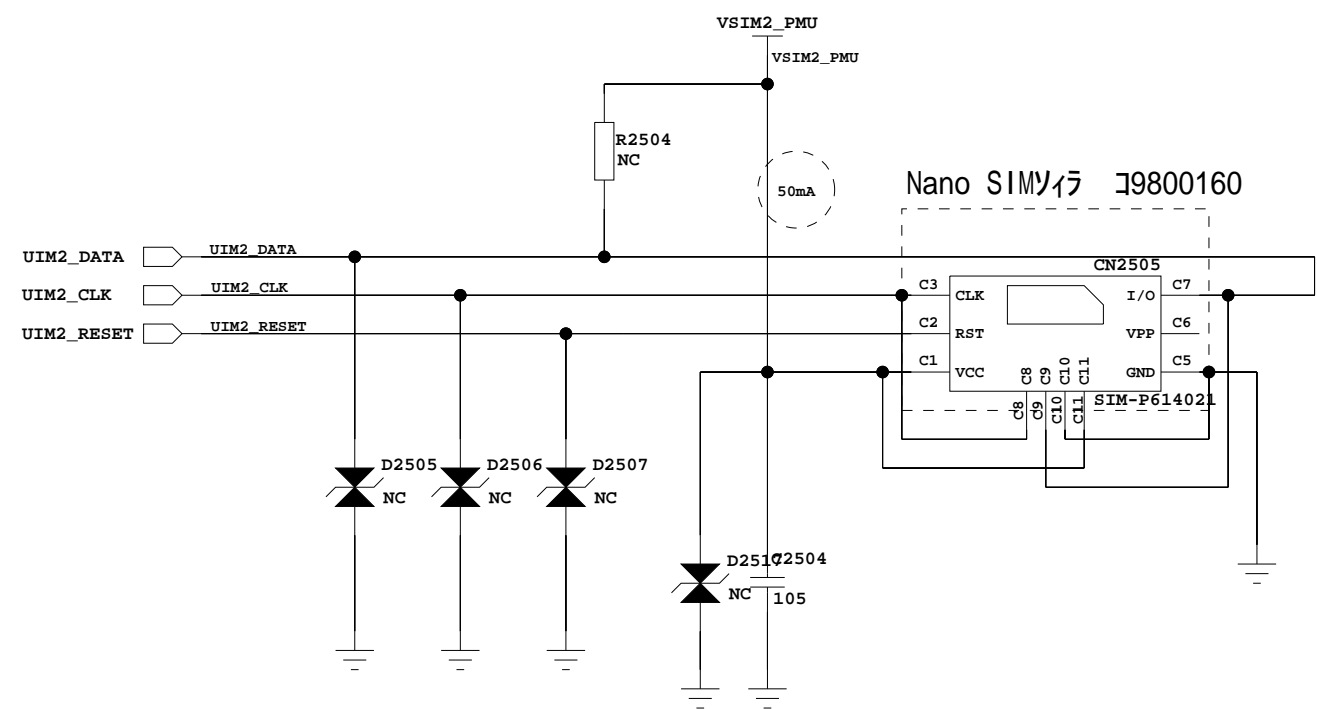

TF_CARD

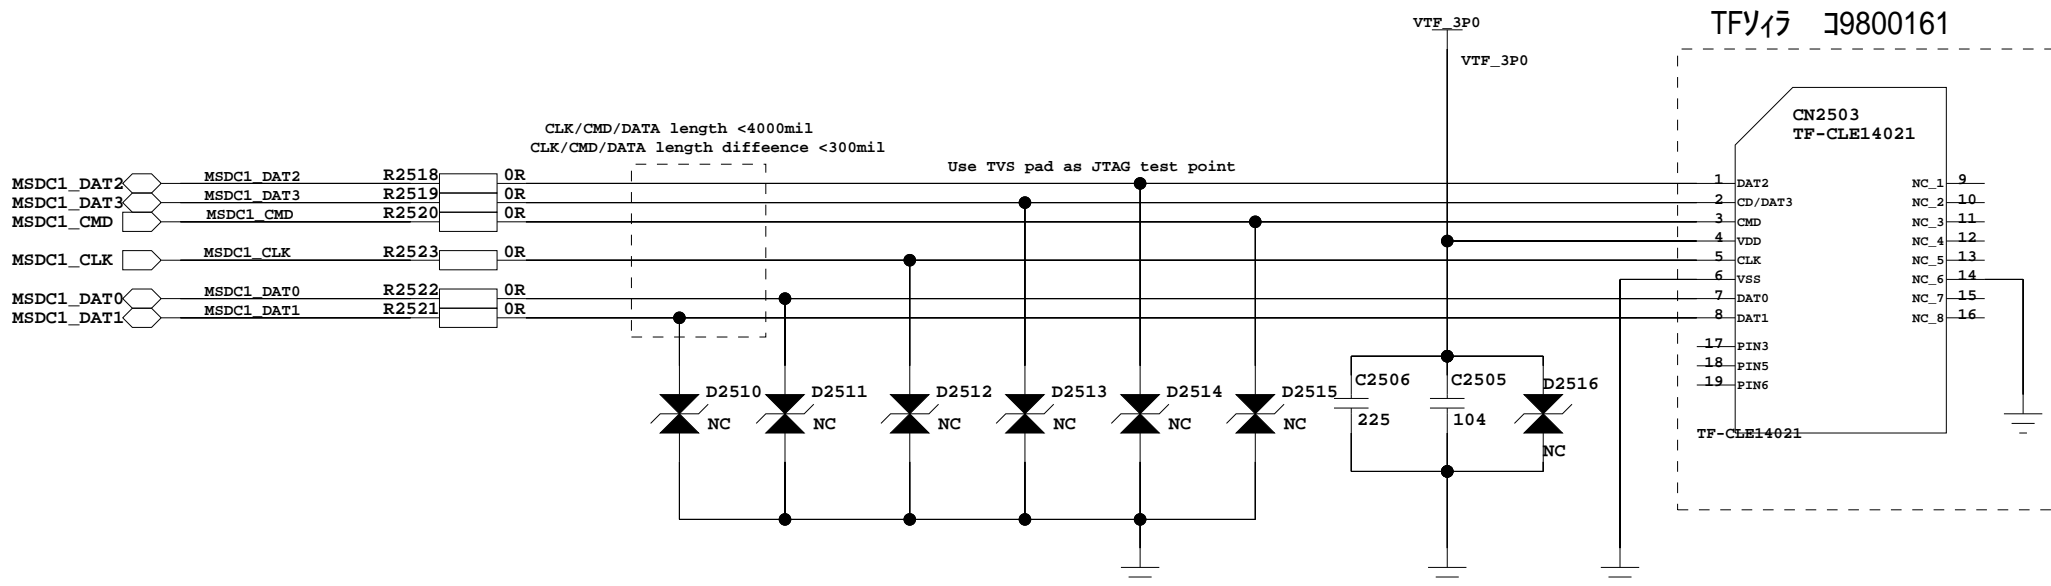


Hot plug: Ext 2.95V supply

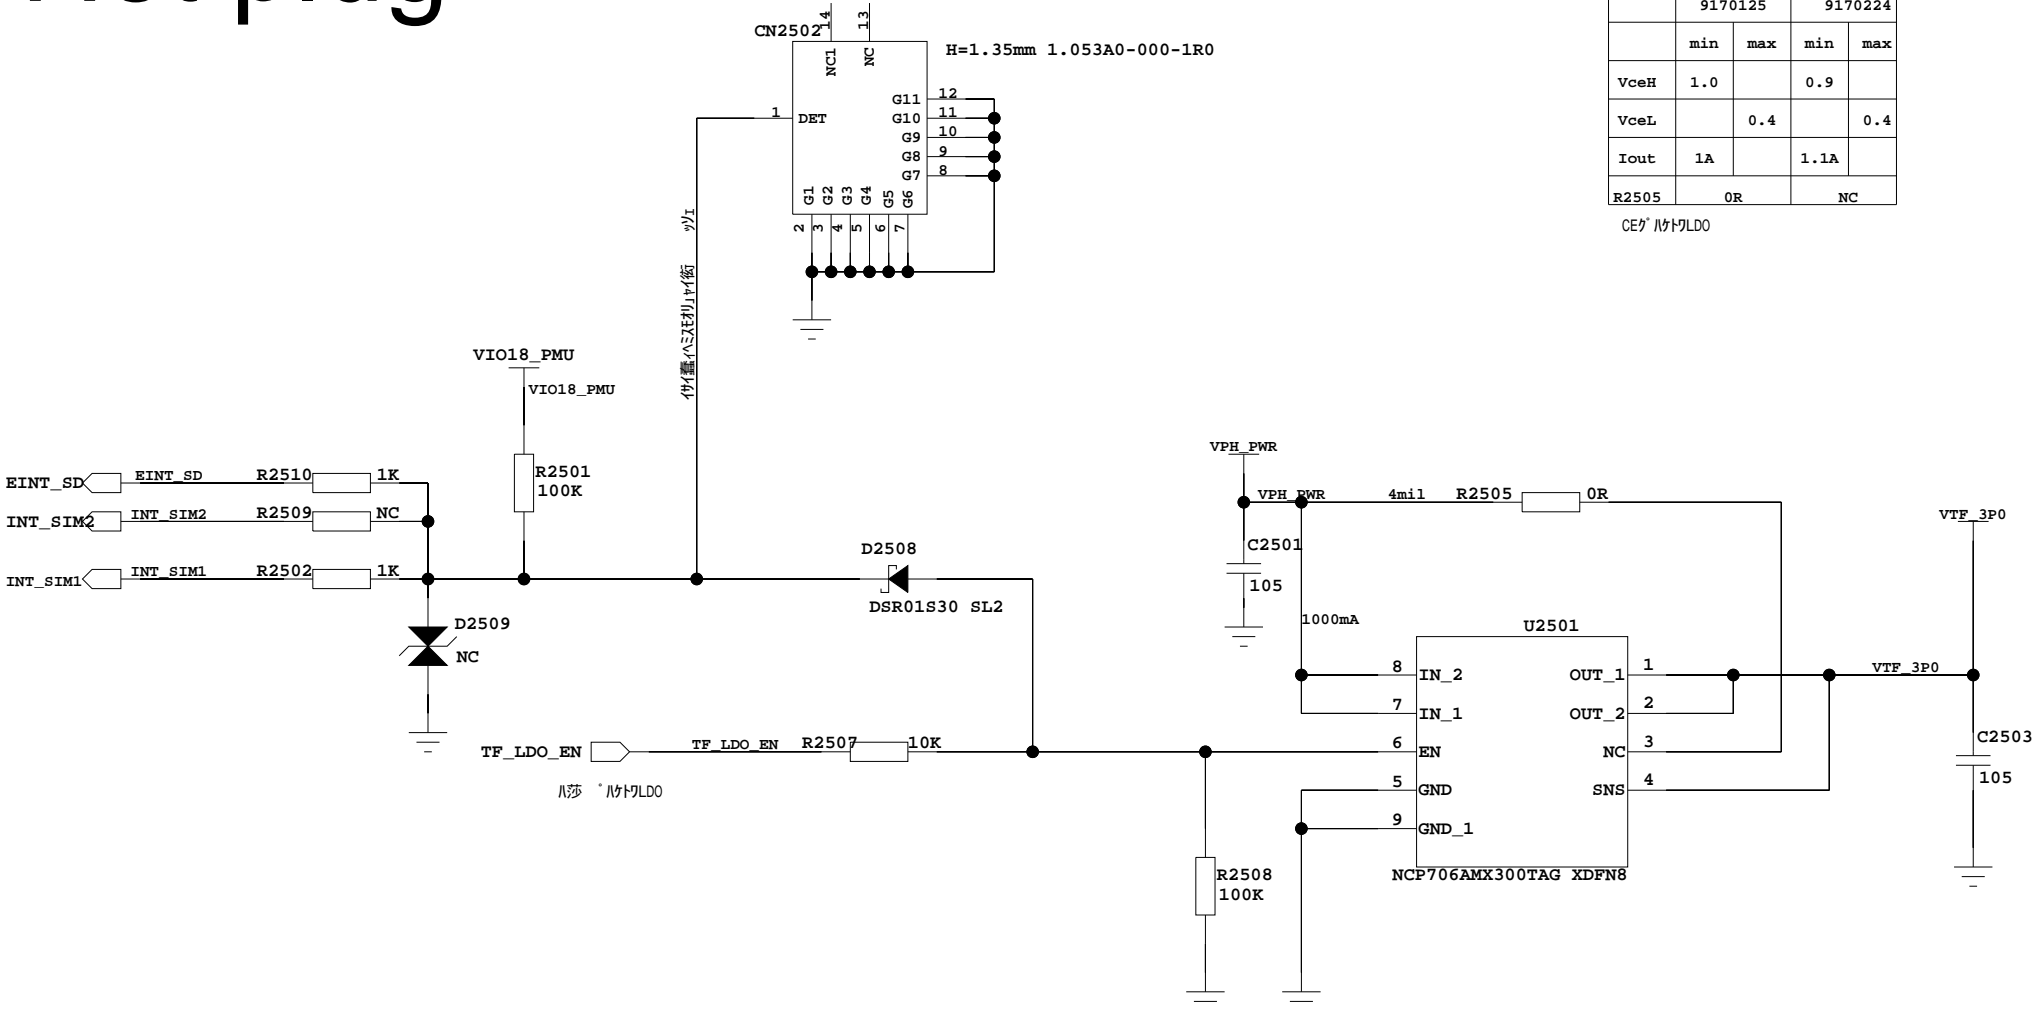


	RP115L301D 9170125		NCP706A 9170224	
	min	max	min	max
VceH	1.0		0.9	
VceL		0.4		0.4
Iout	1A		1.1A	
R2505	OR		NC	

CEP/1019LDO


Main CAMERA

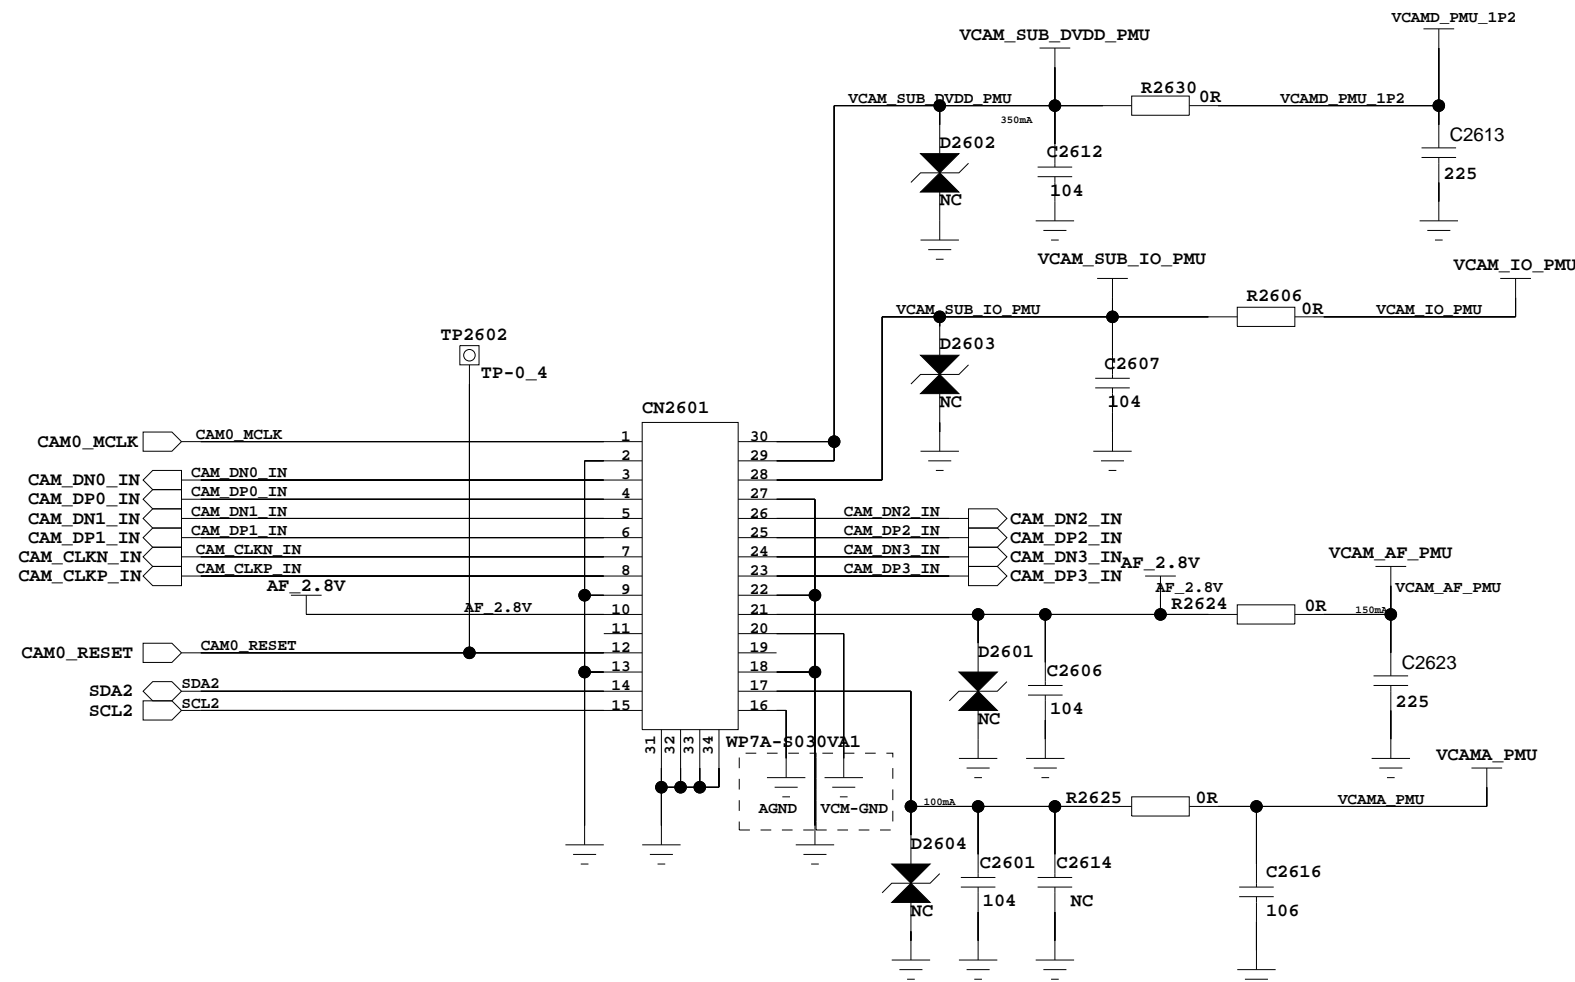

SUB_Camera

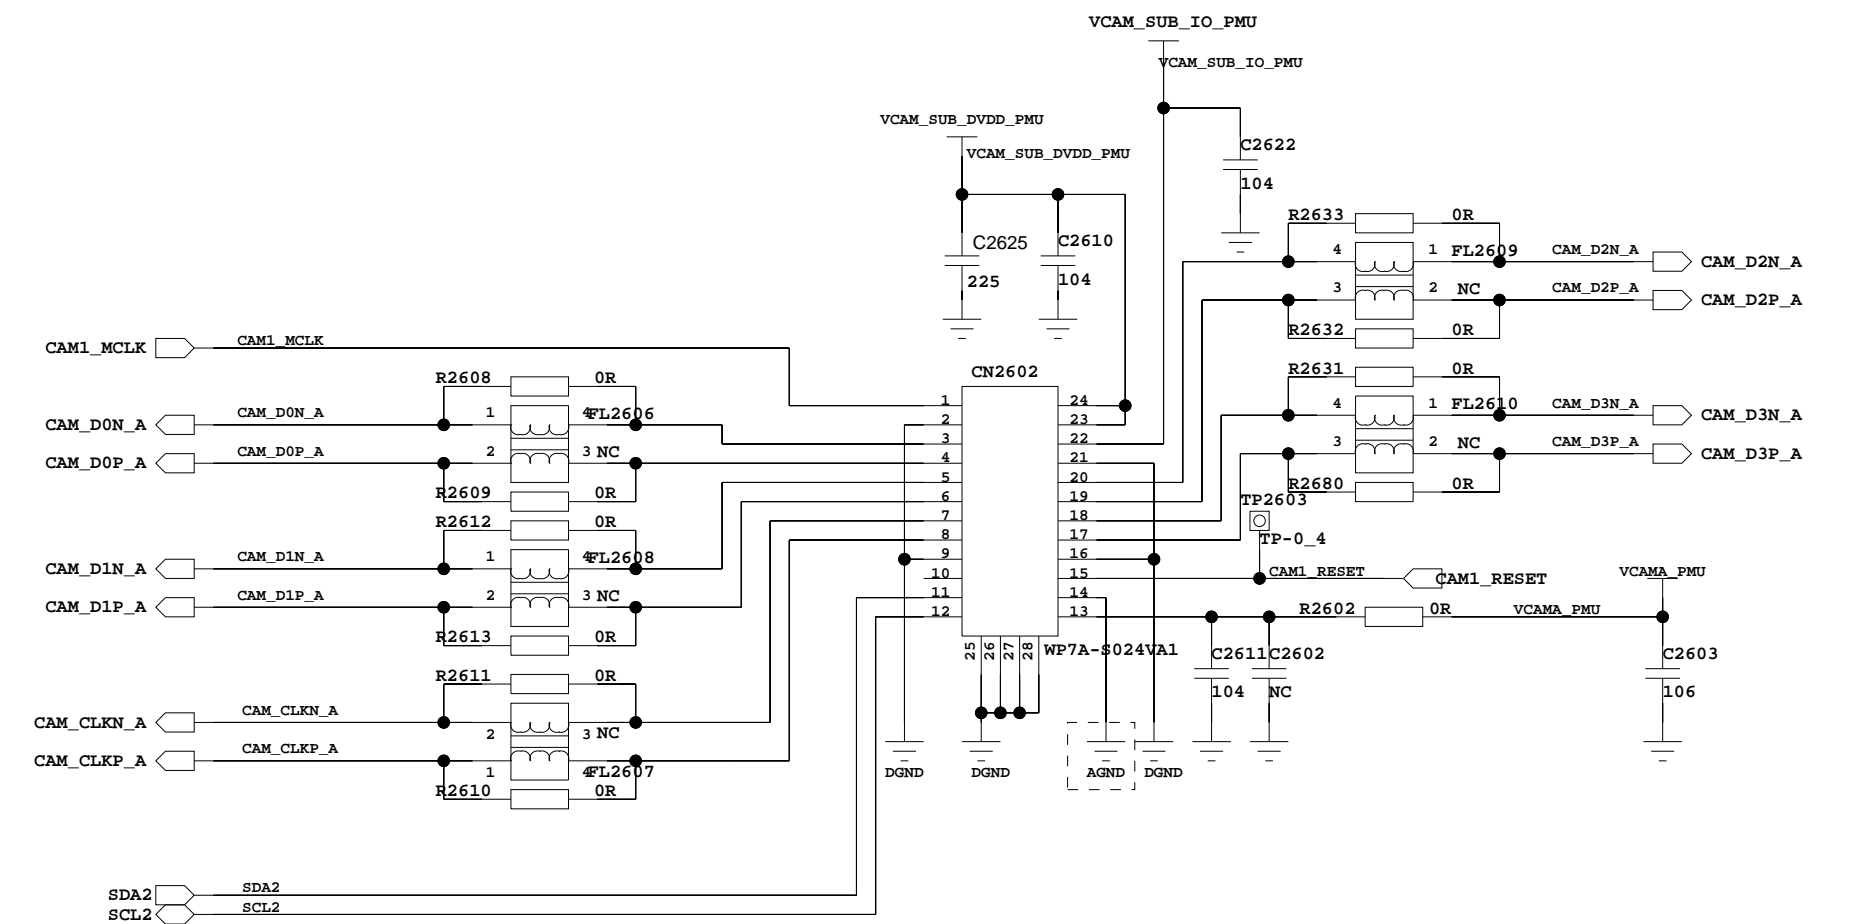


CSI CMF

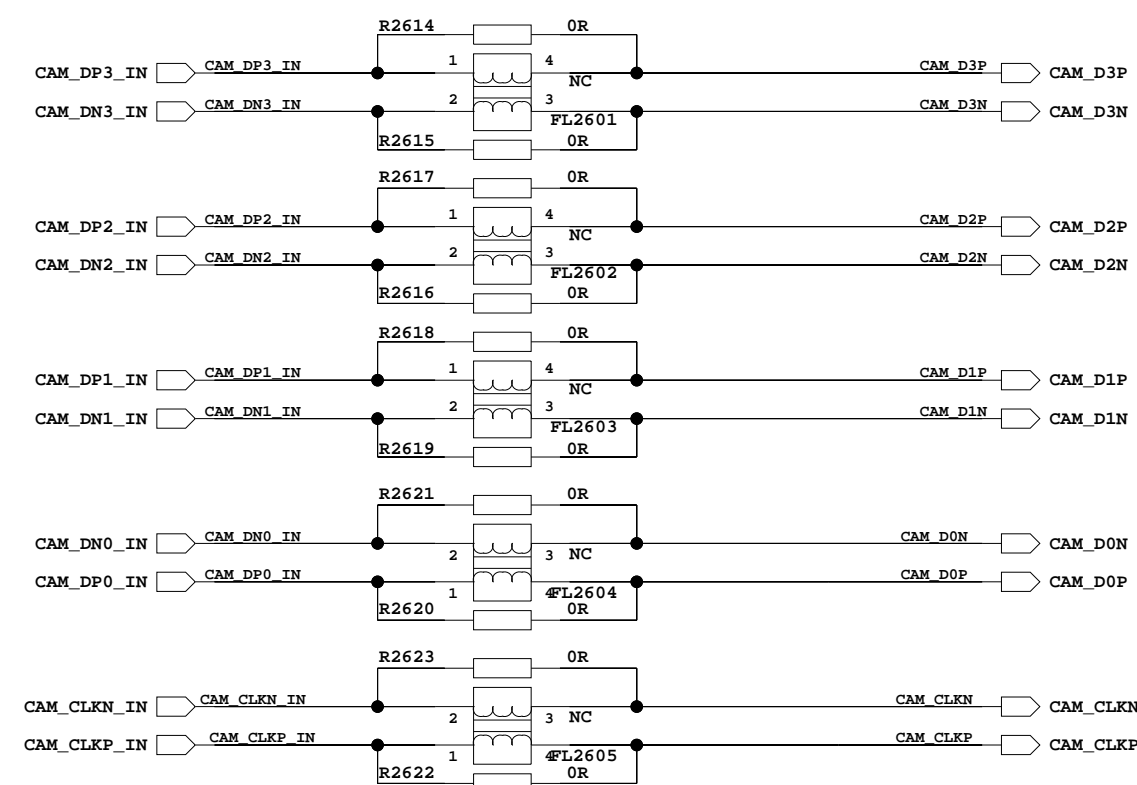

ケイト」ツヒイニ VTや、チ ャム鰻、OKコ ・オ


Flash LED Driver

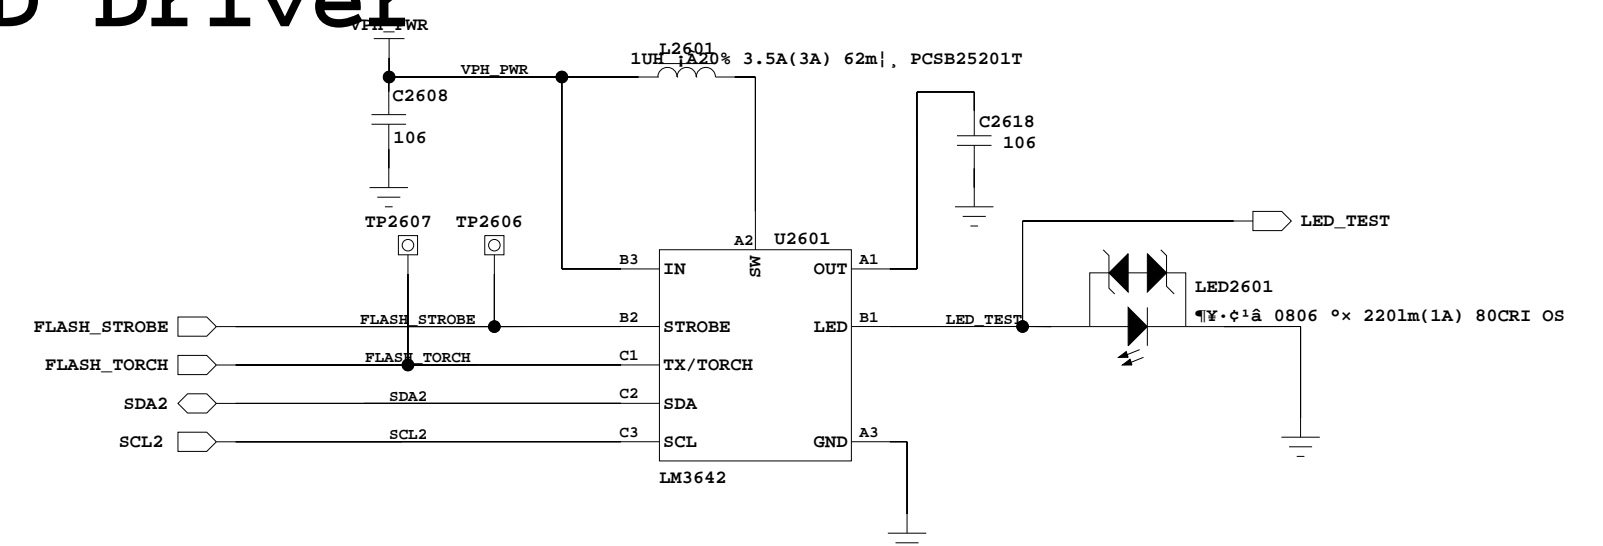


LM3642 slave Address is 0x63

CODEC

MUTE	SEL	FOUNCTION
0	0	L1=LSPKR; R1=RSPKR
0	1	L2=LSPKR; R2=RSPKR

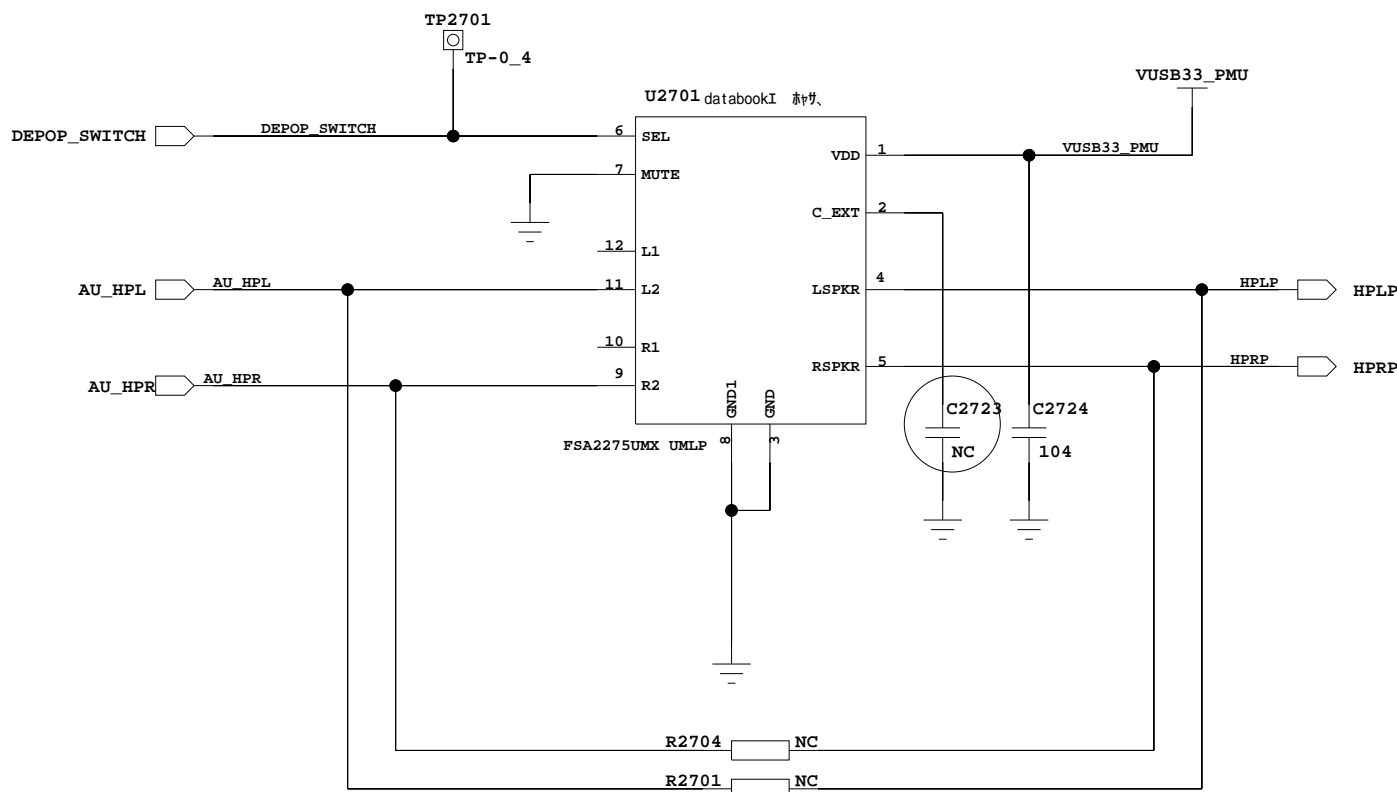


SMART PA

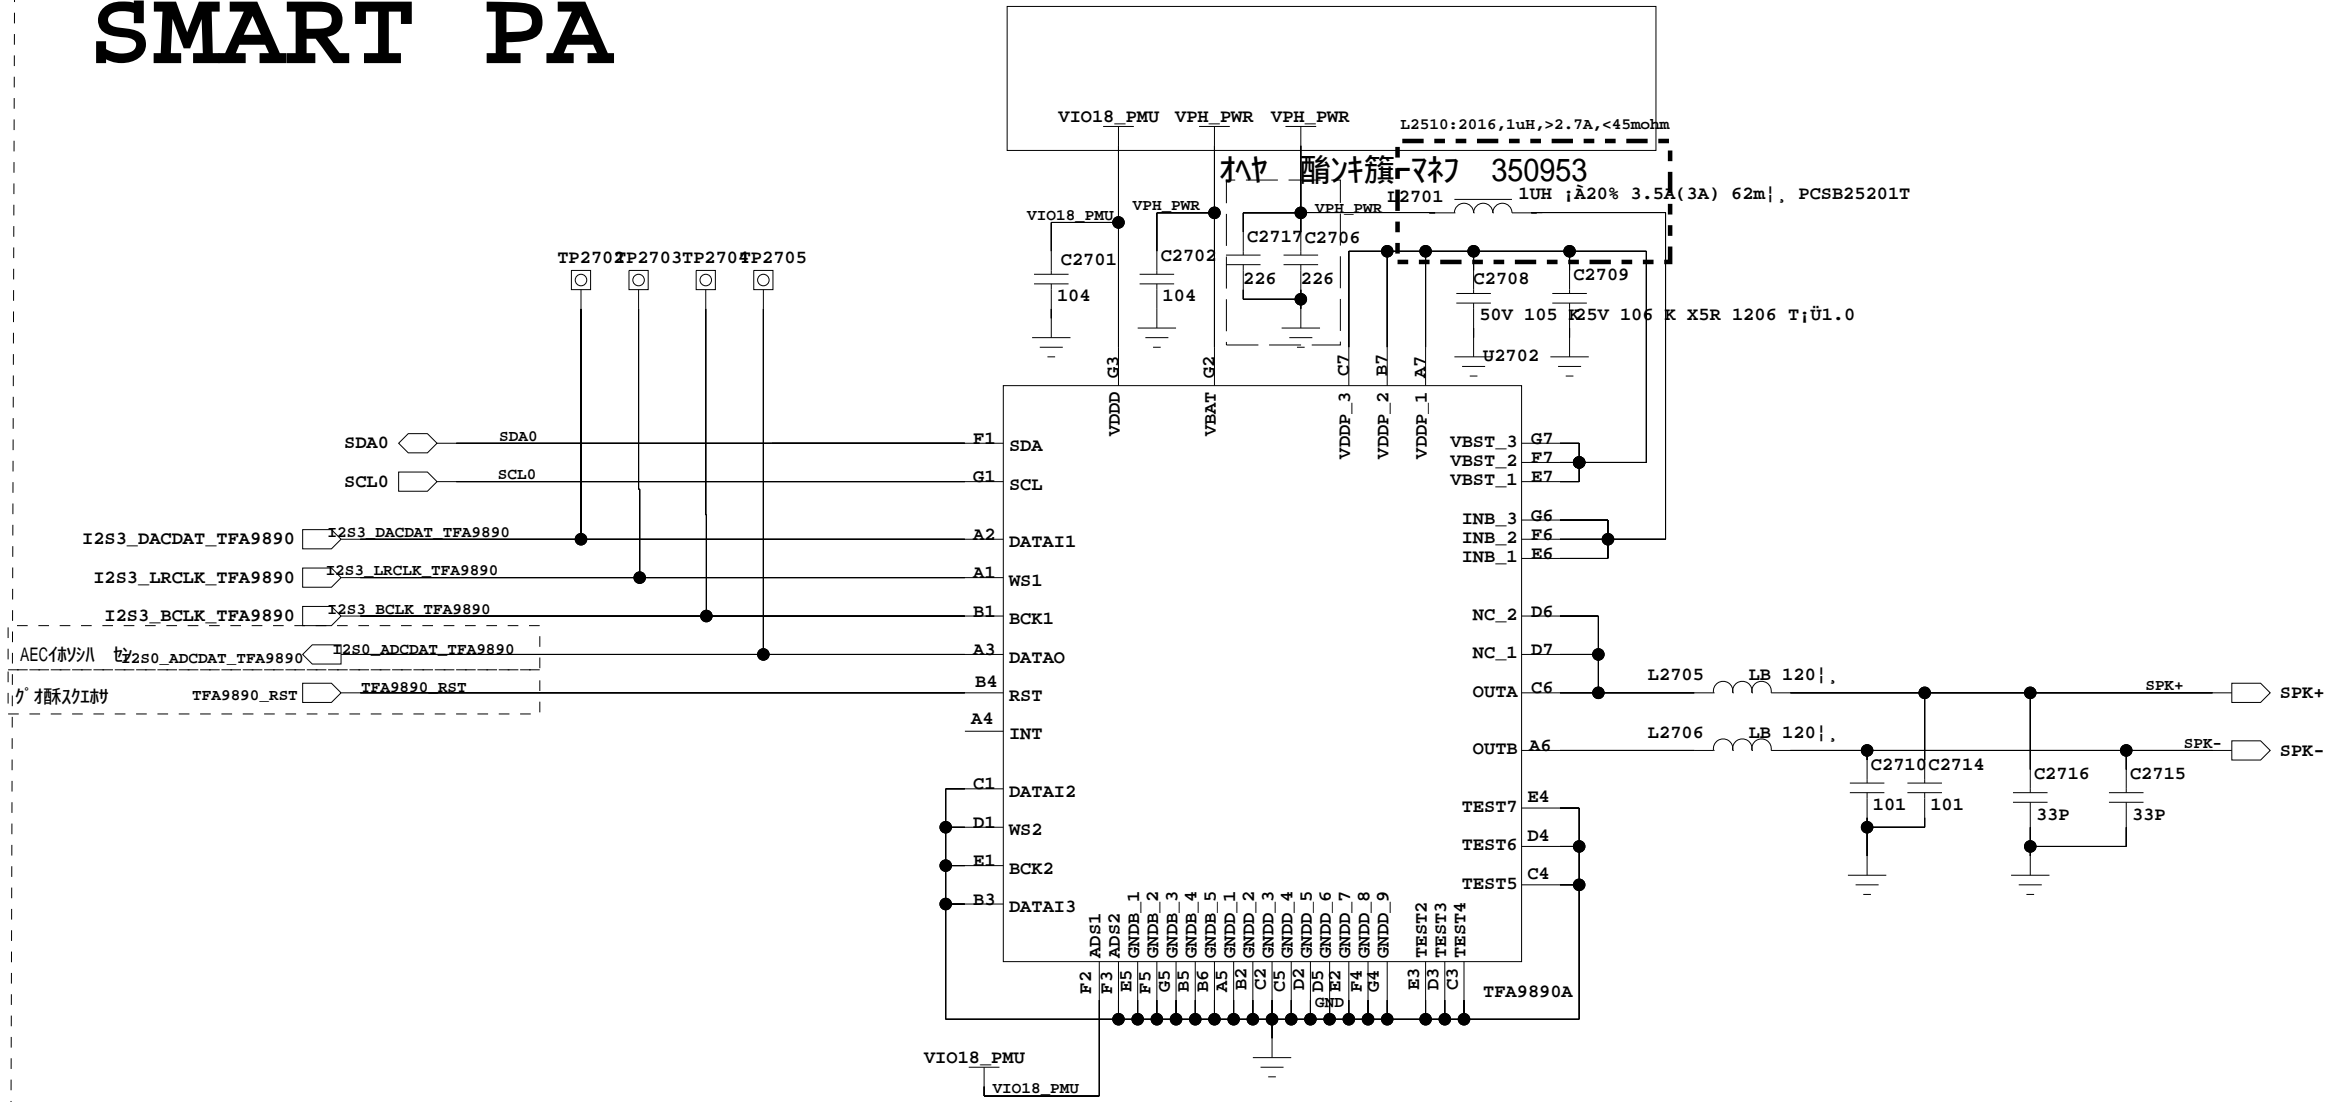


TFA9890A slave Address is 0x35

Ant-Noise MIC

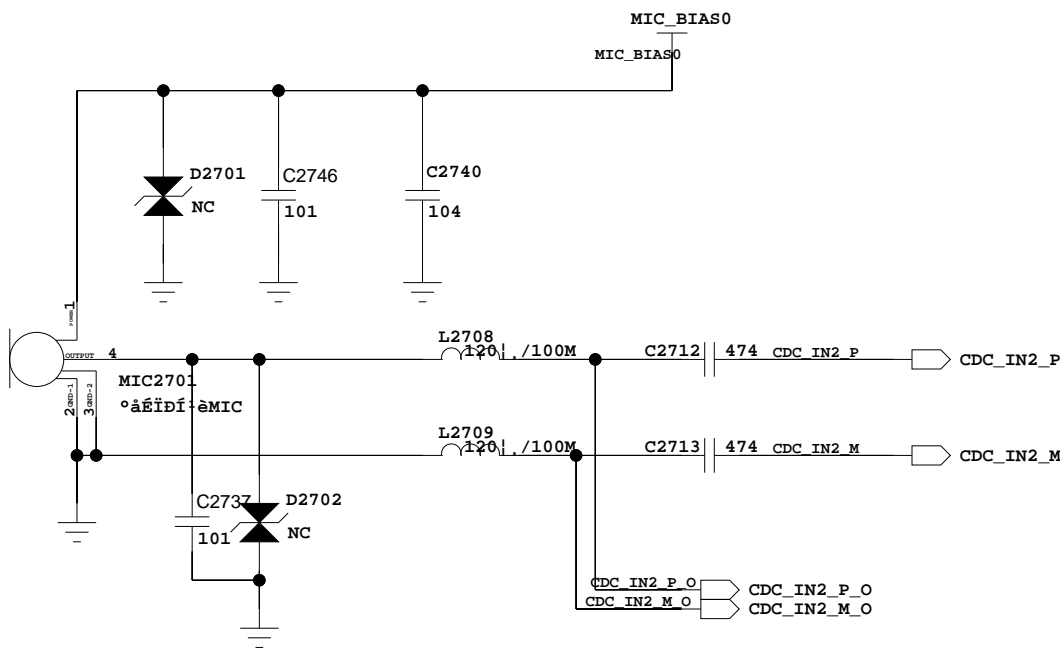

Receiver

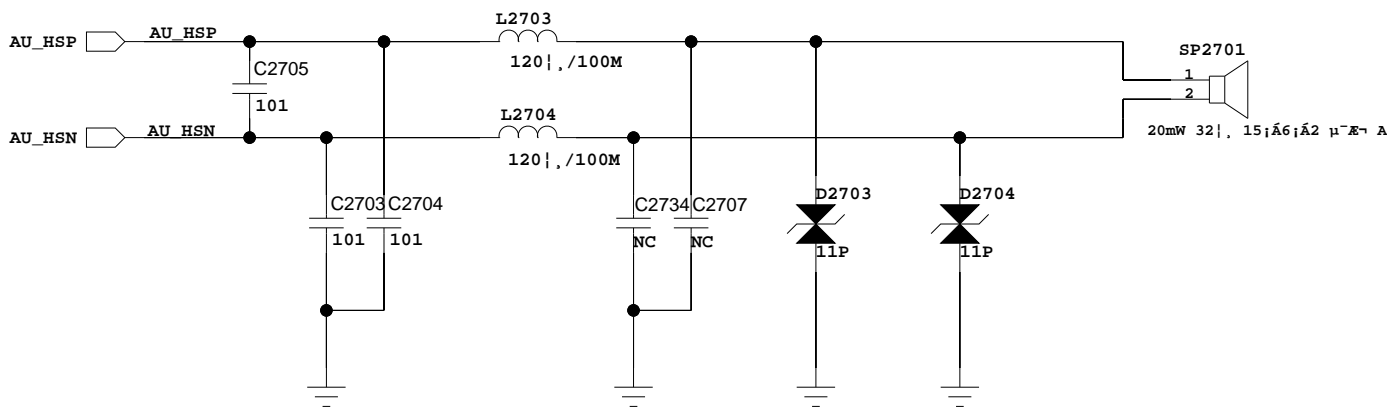

A



C

D

F

—



1


—




	CS N

5

FAST CHARGE

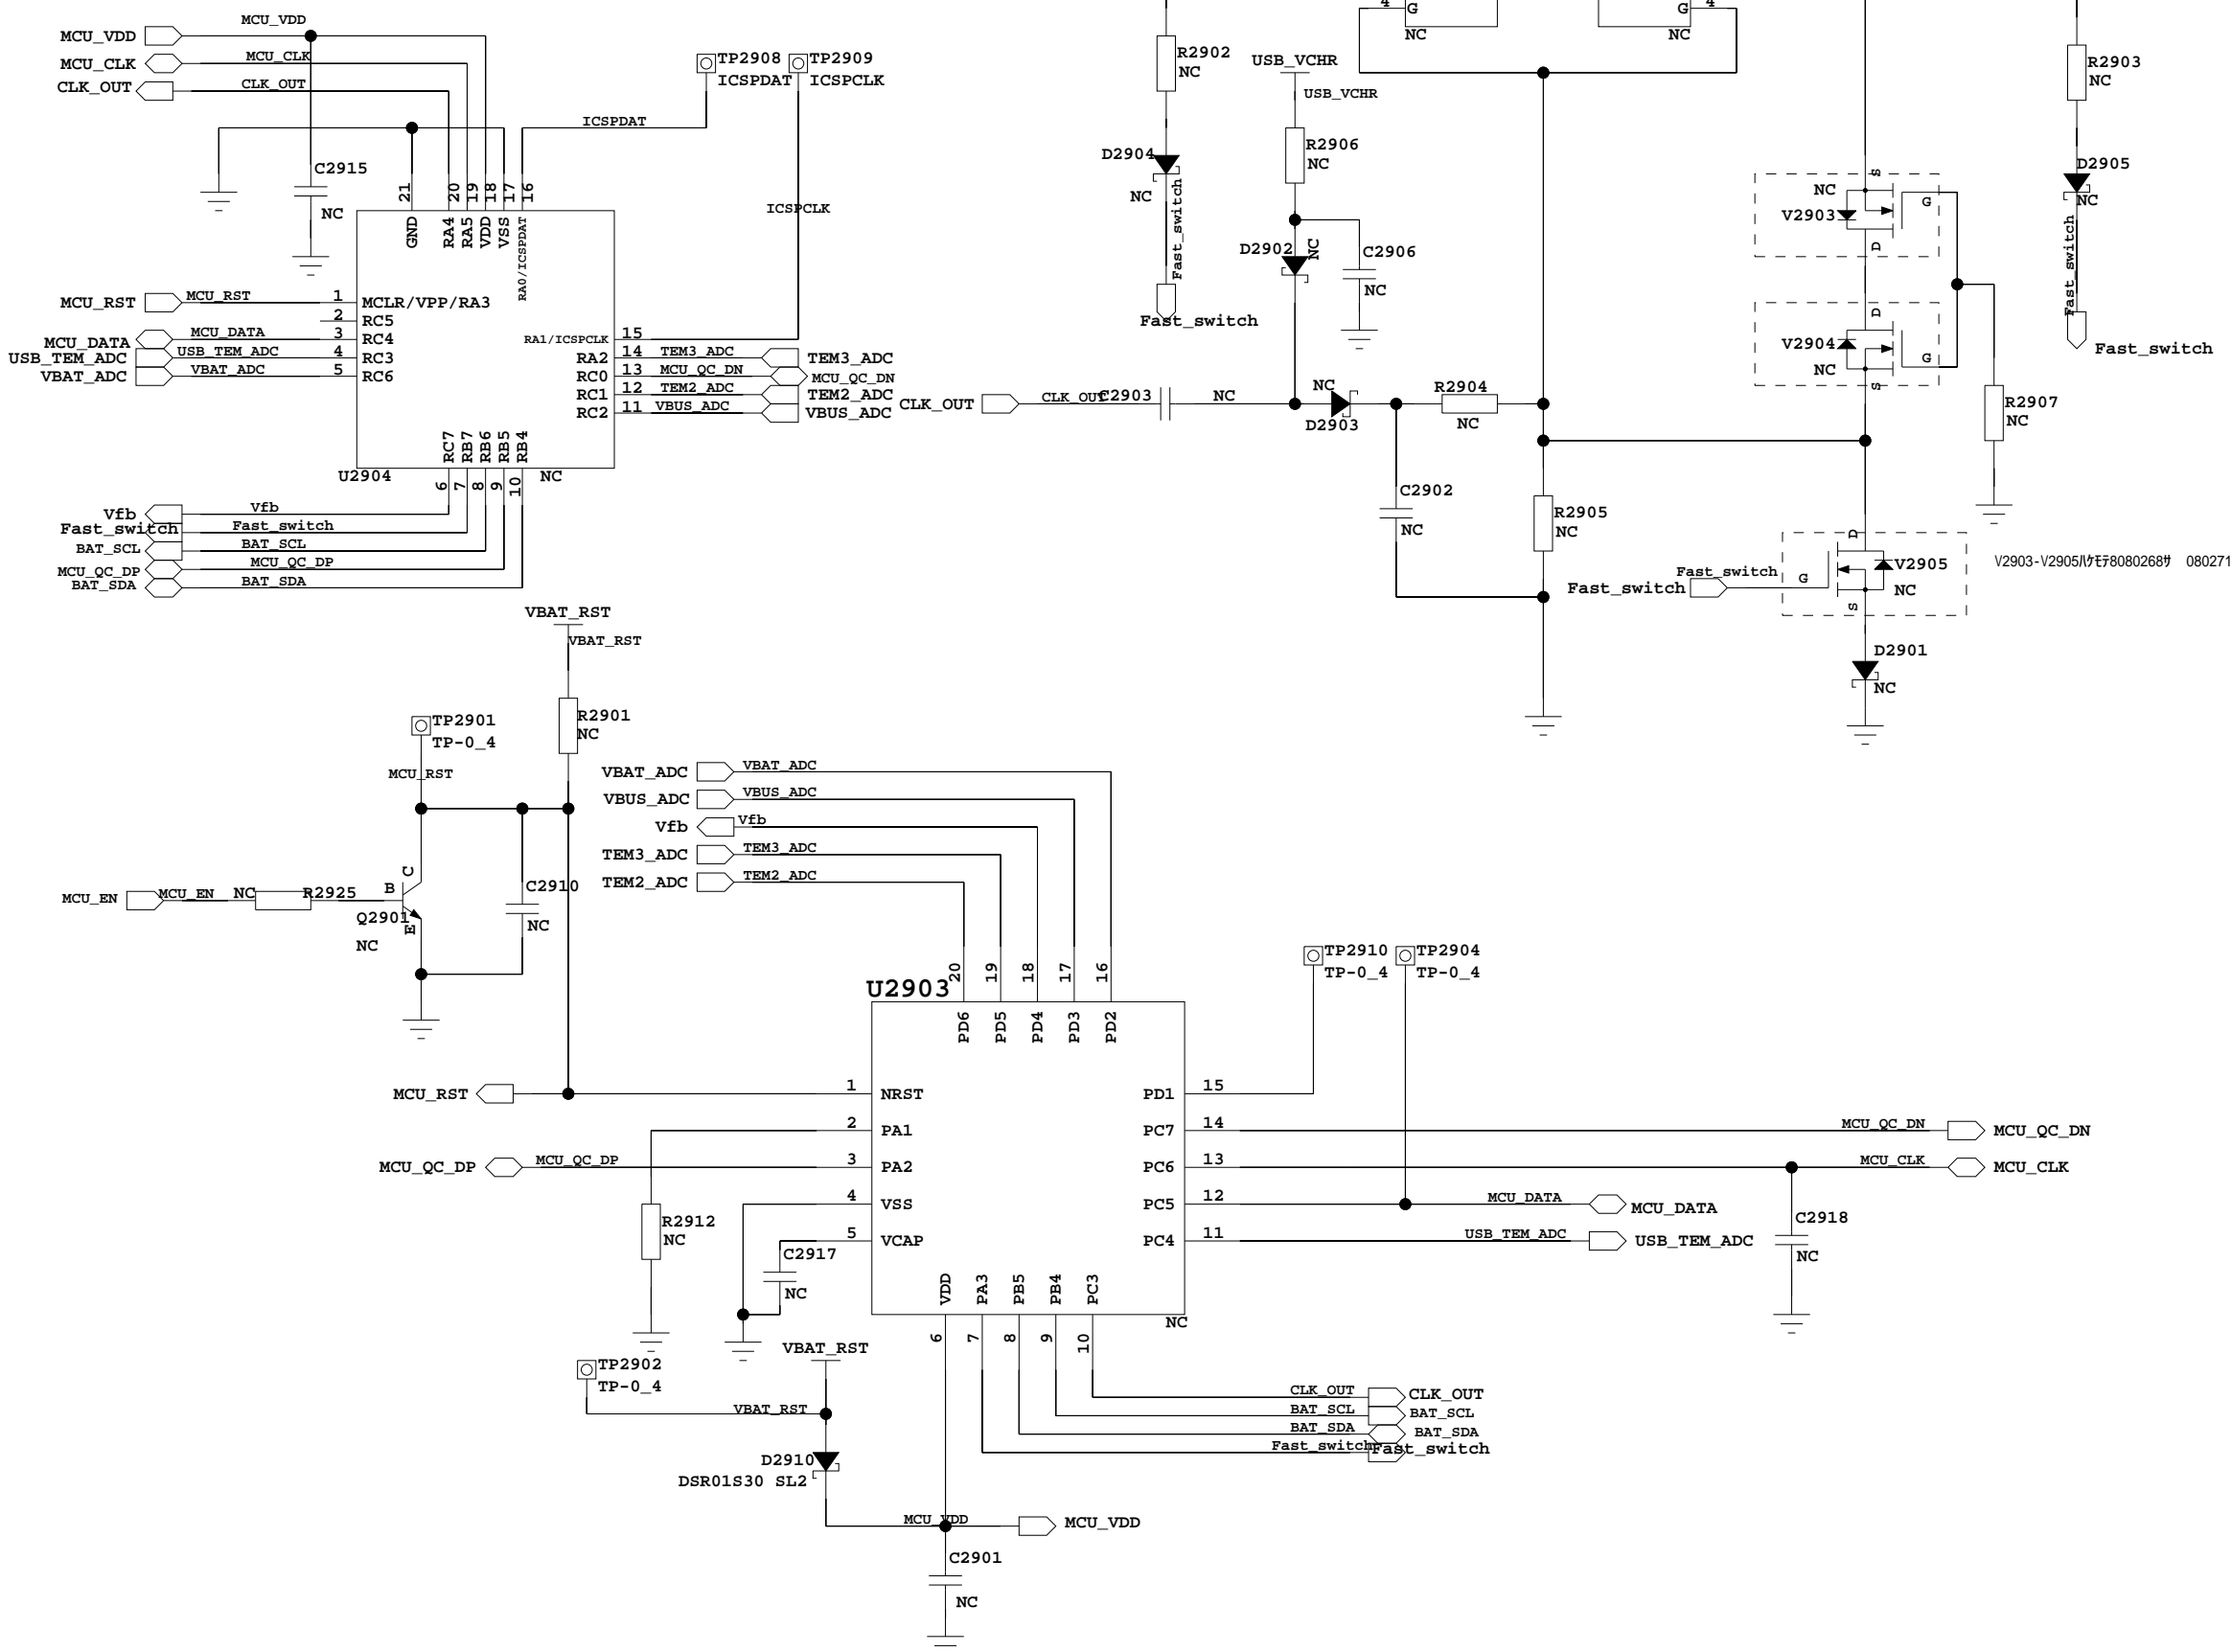


USBソケット

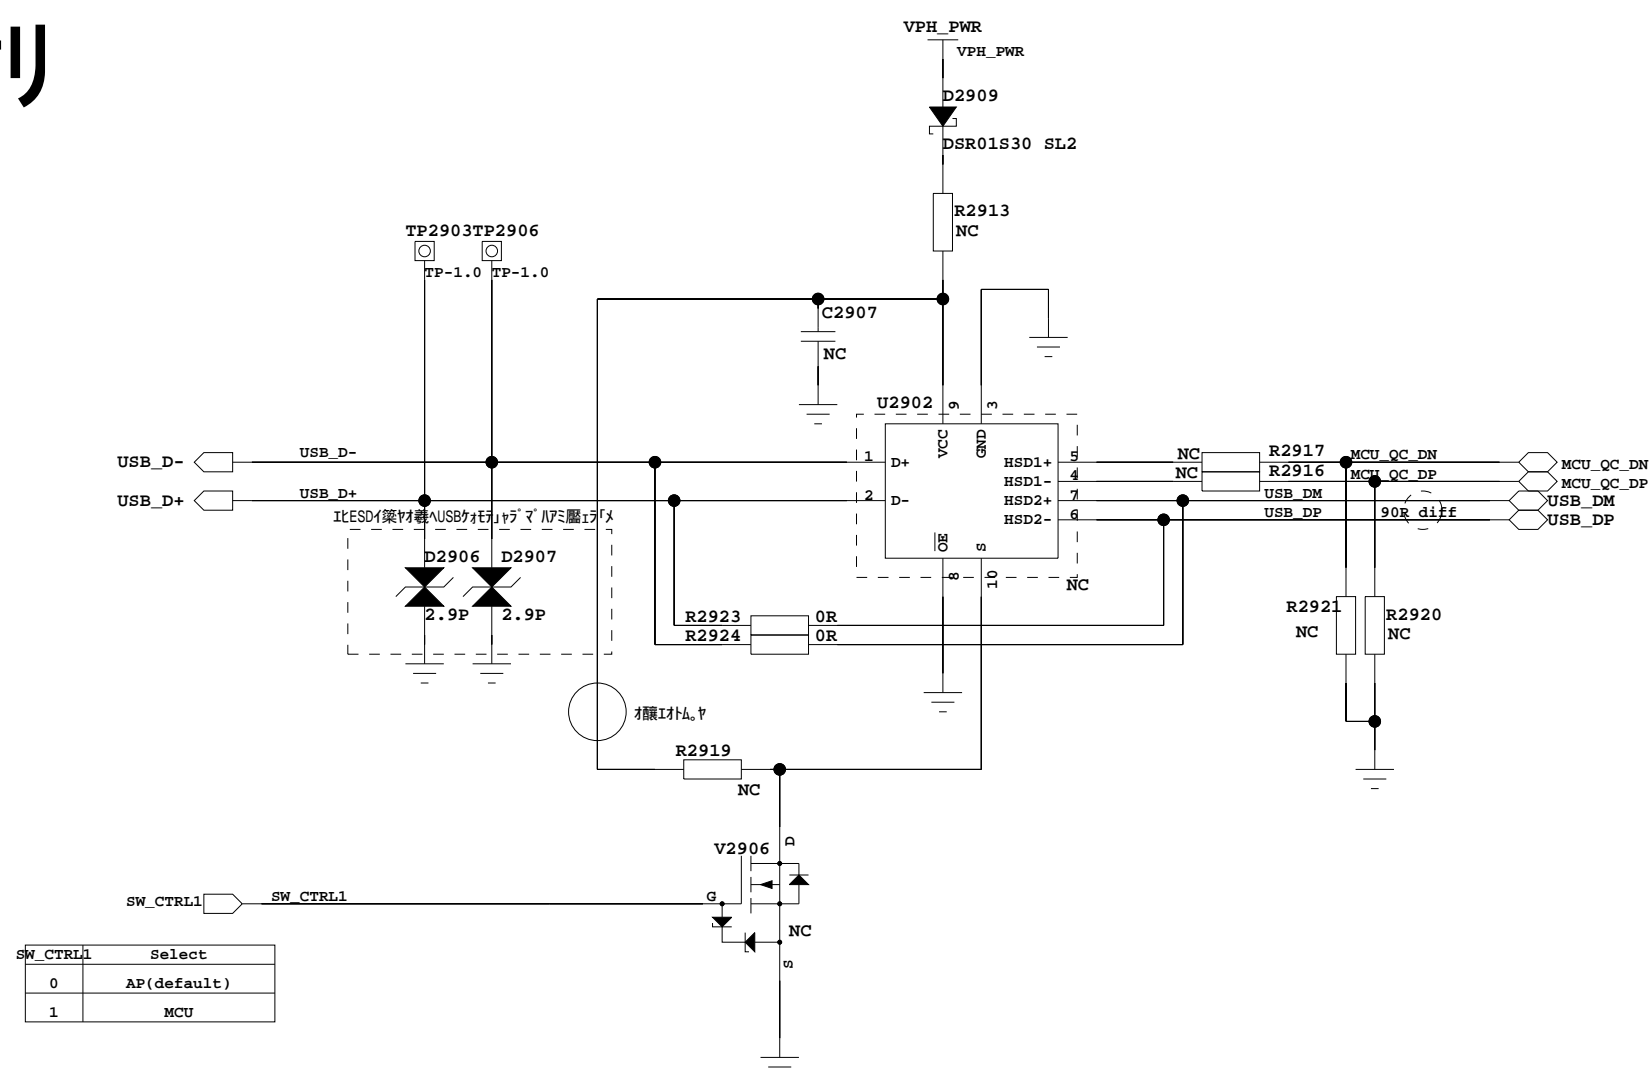


SW_CTRL1	Select
0	AP(default)
1	MCU


ADC, xβİβxçÒâ°üμØ

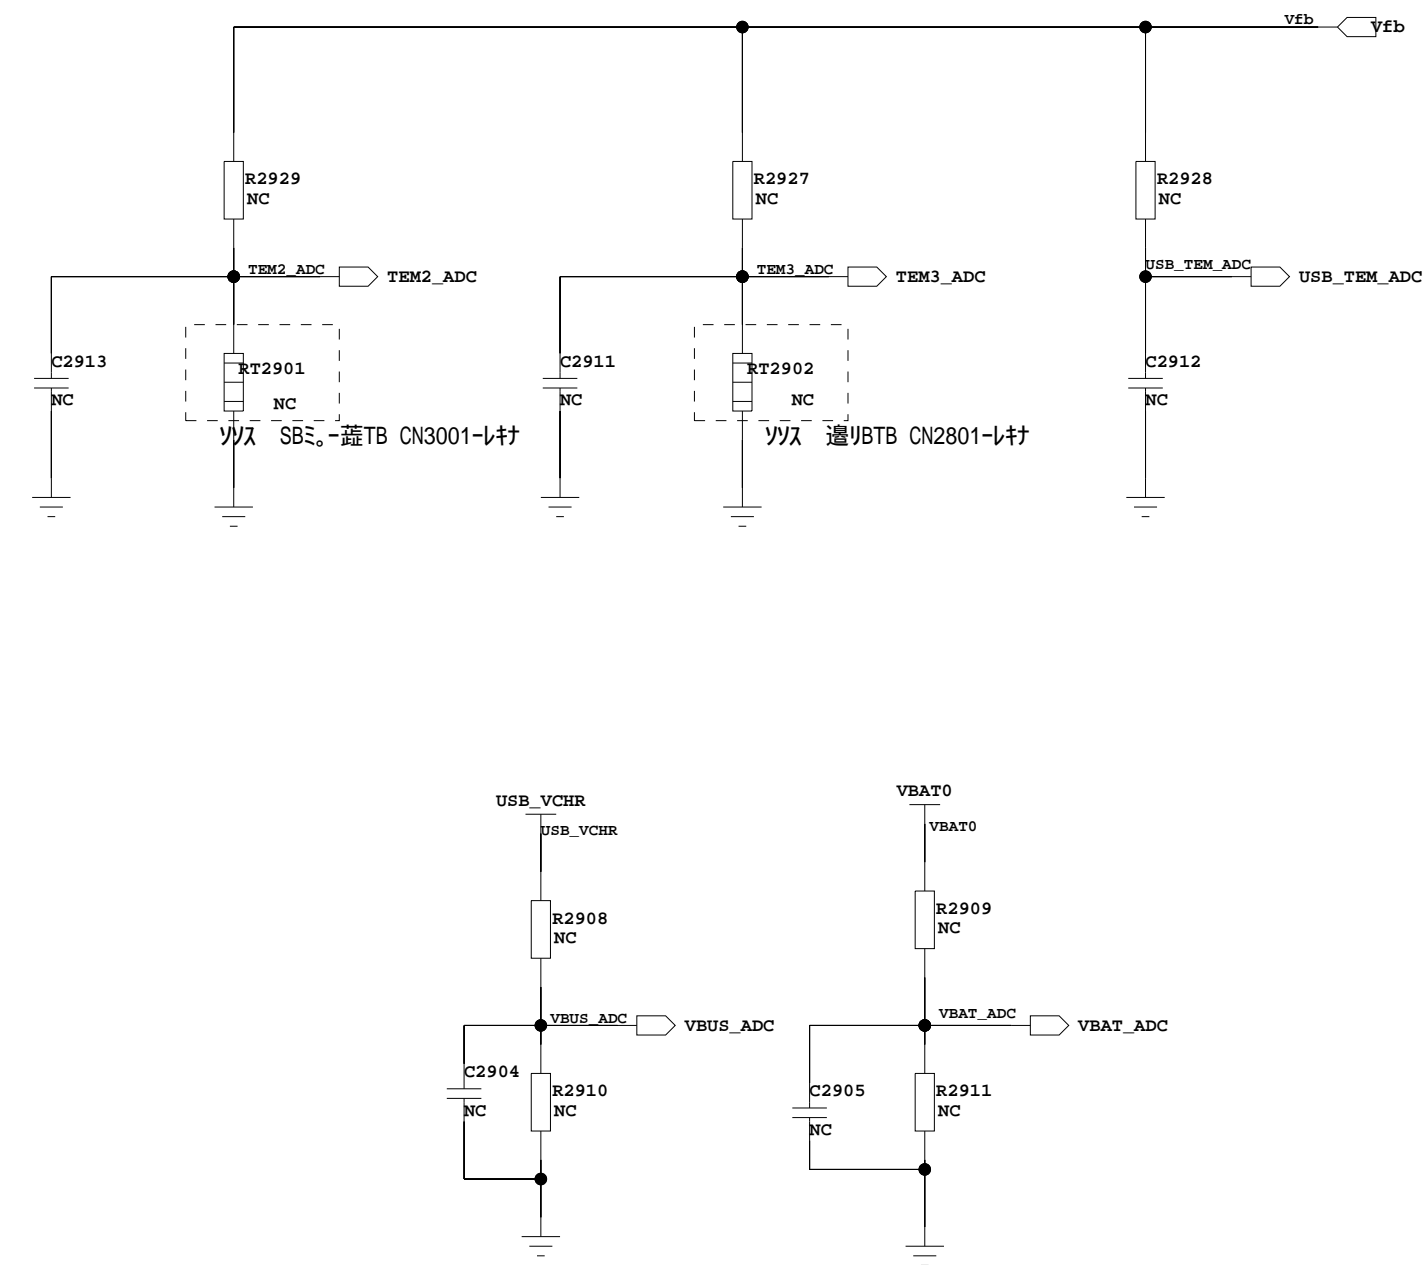


オ酥禾スラエササIC

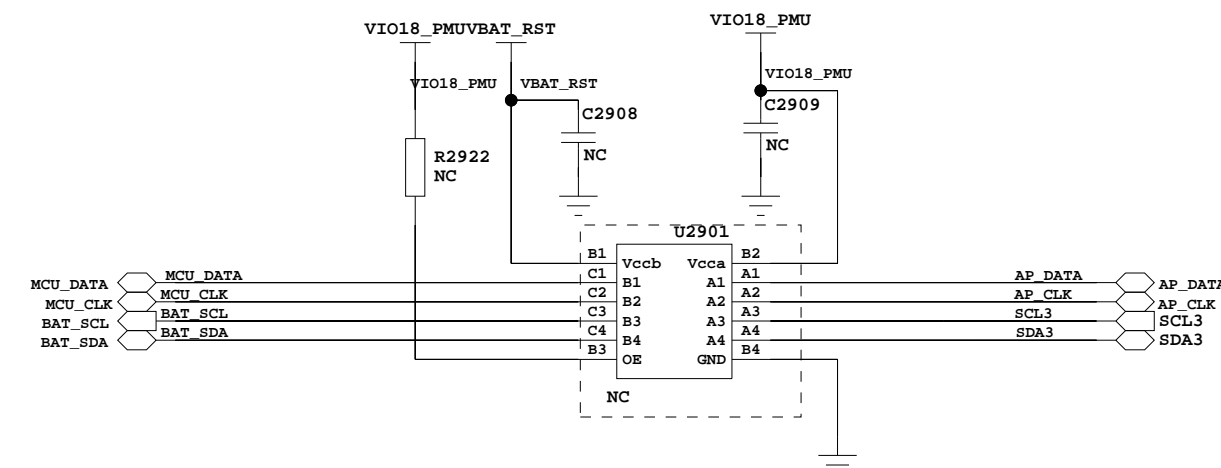


USB Switch

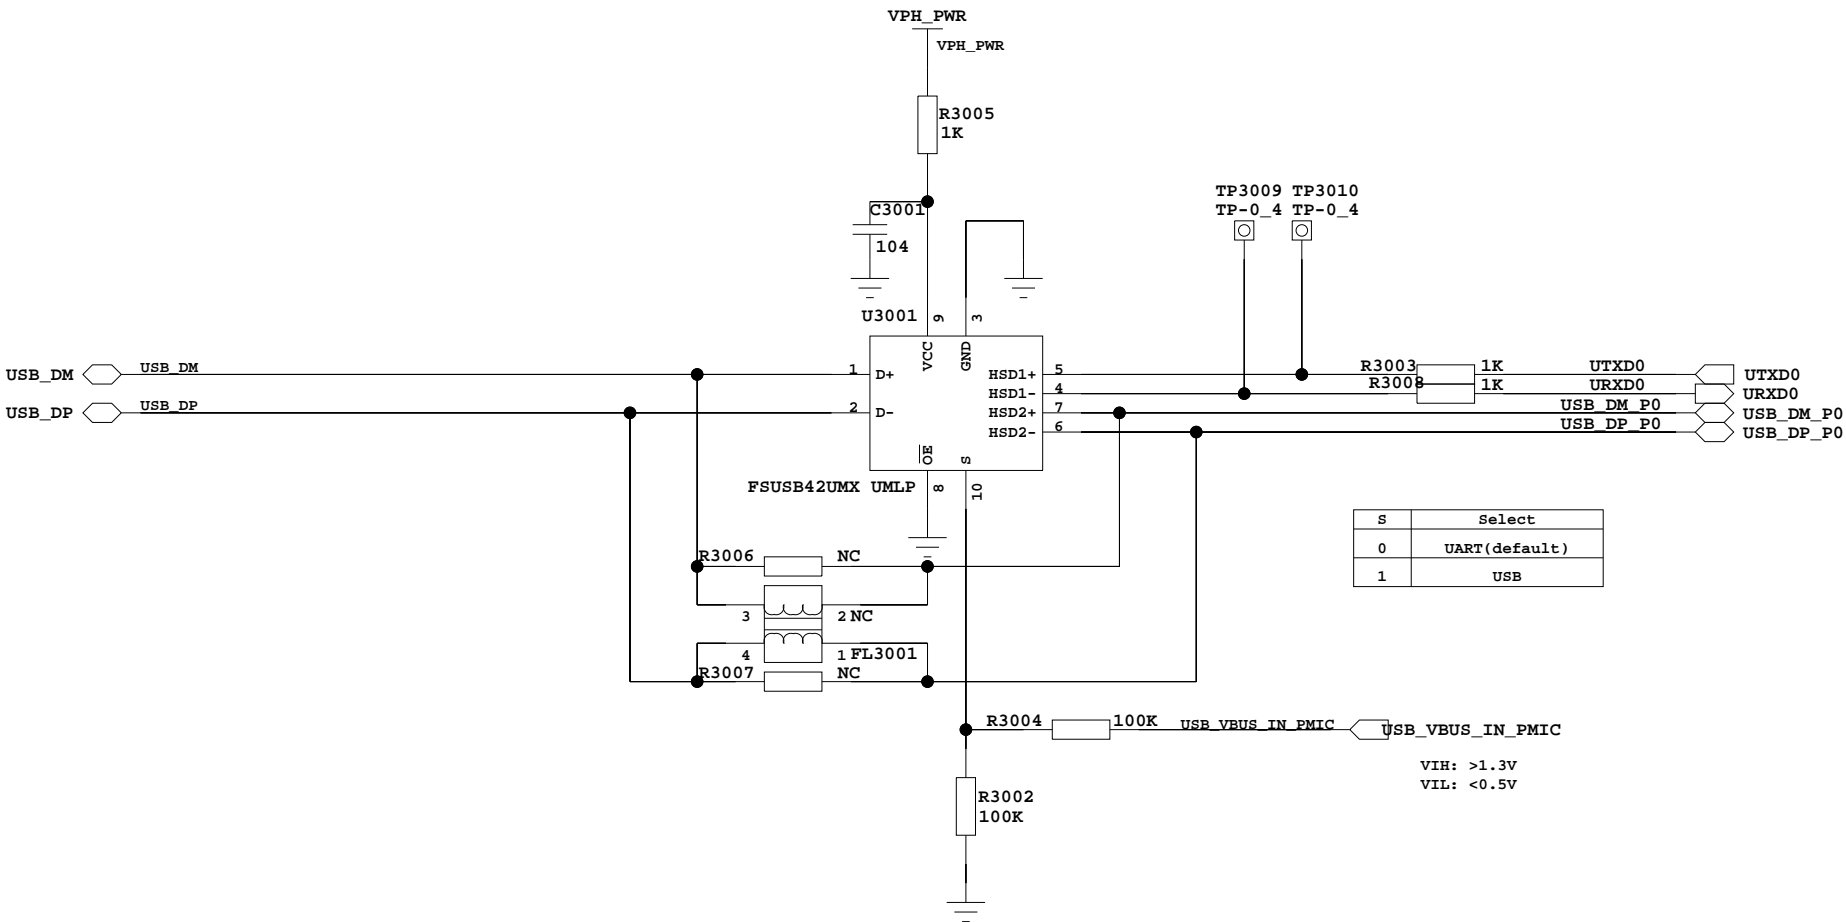


USB_BTBT

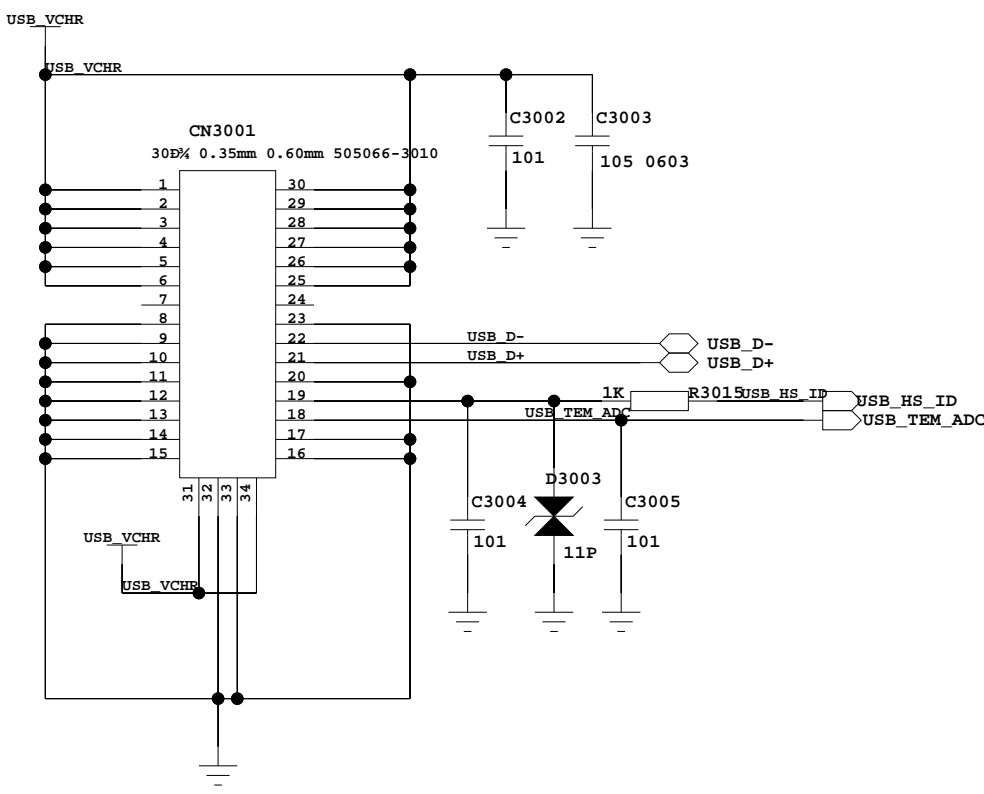


KEY PAD

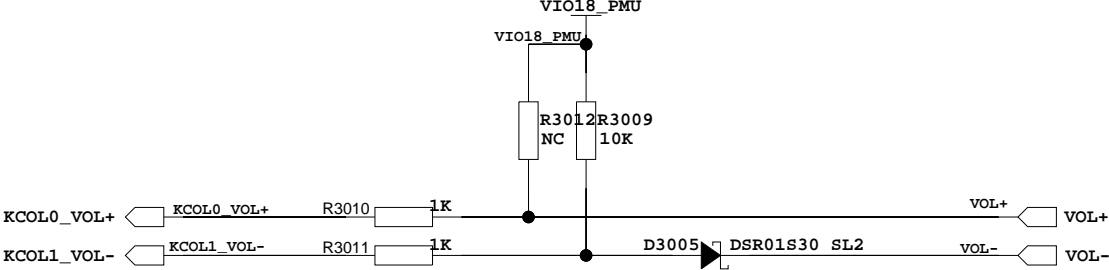


TP¹ | ÄÜ² âÊÔµã

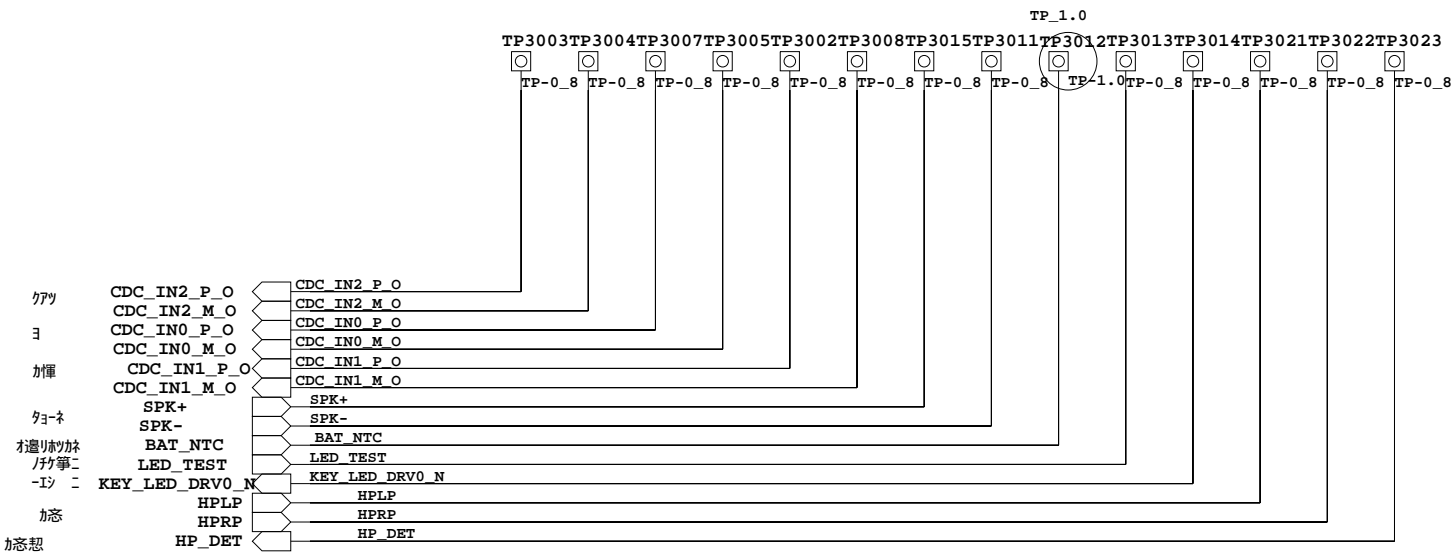


POWERKEY

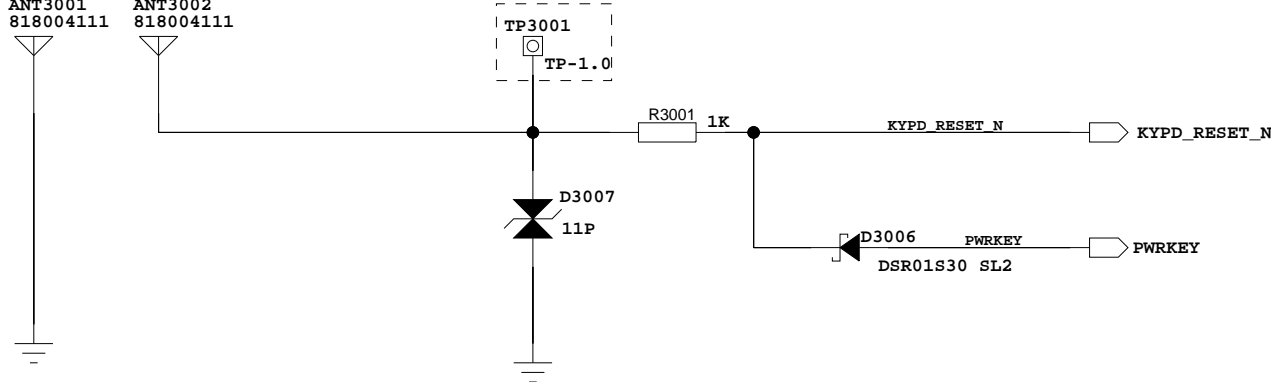




VolumeKEY

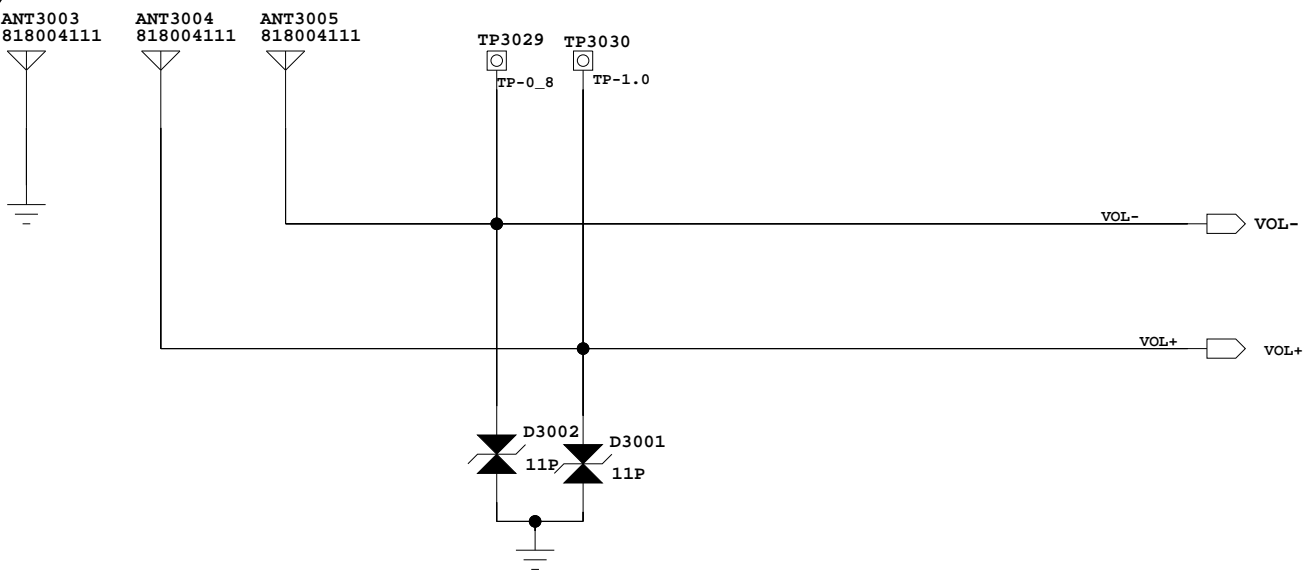

TEST POINT

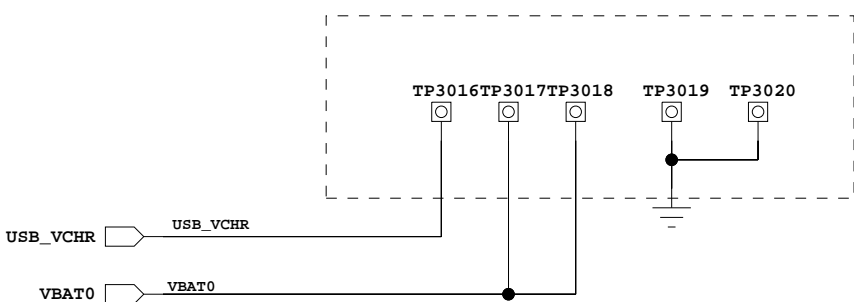

FPC CONNECT BTB

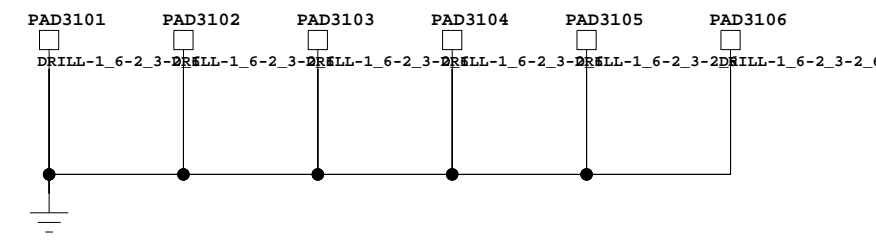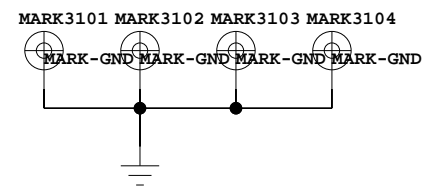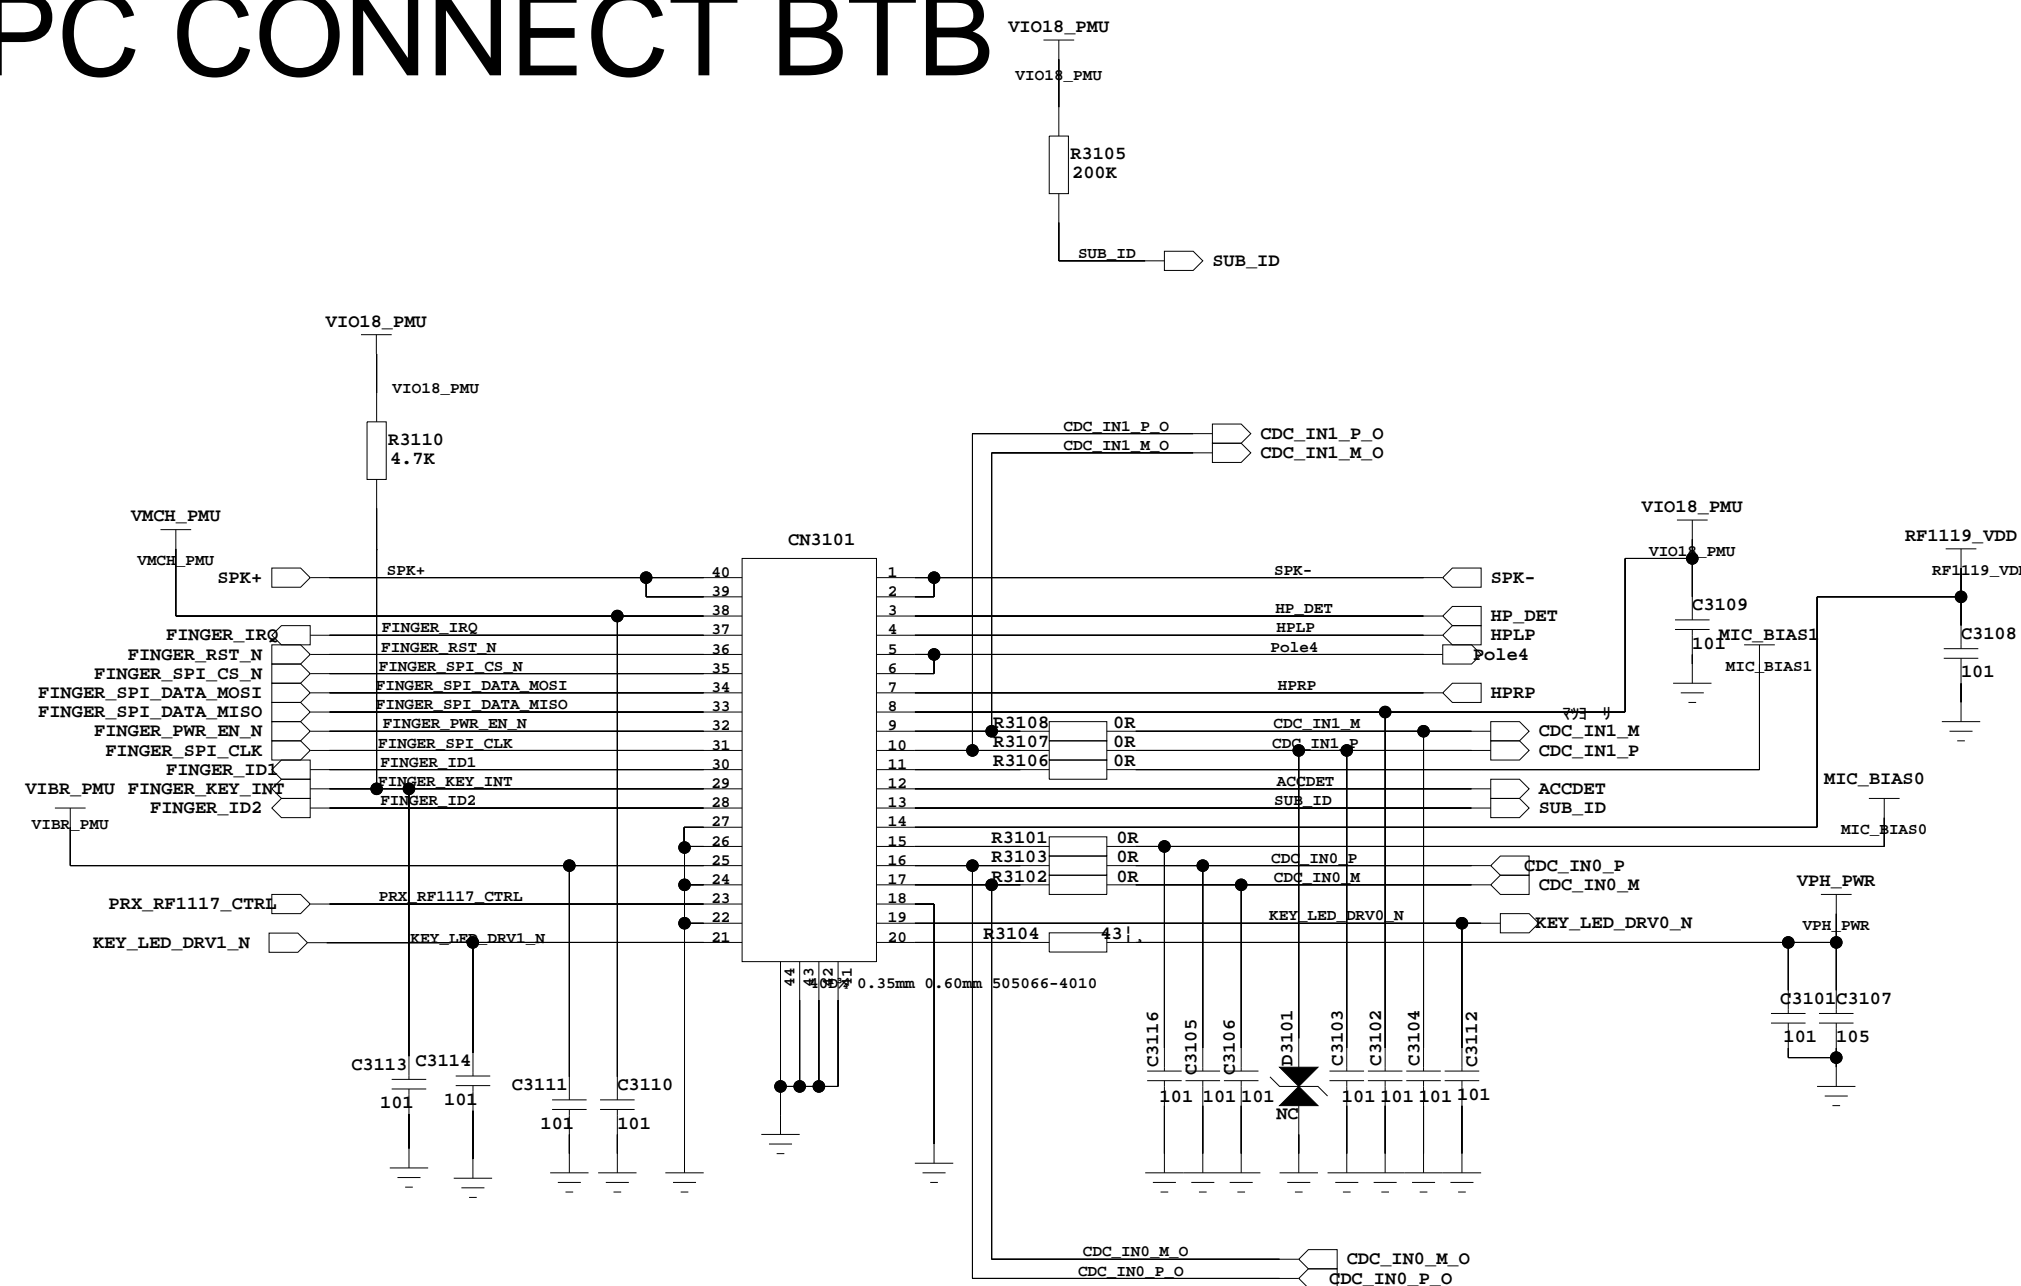

A

B

C

D

E

F

A

B


C

D


E

F

COB TP & FT5436

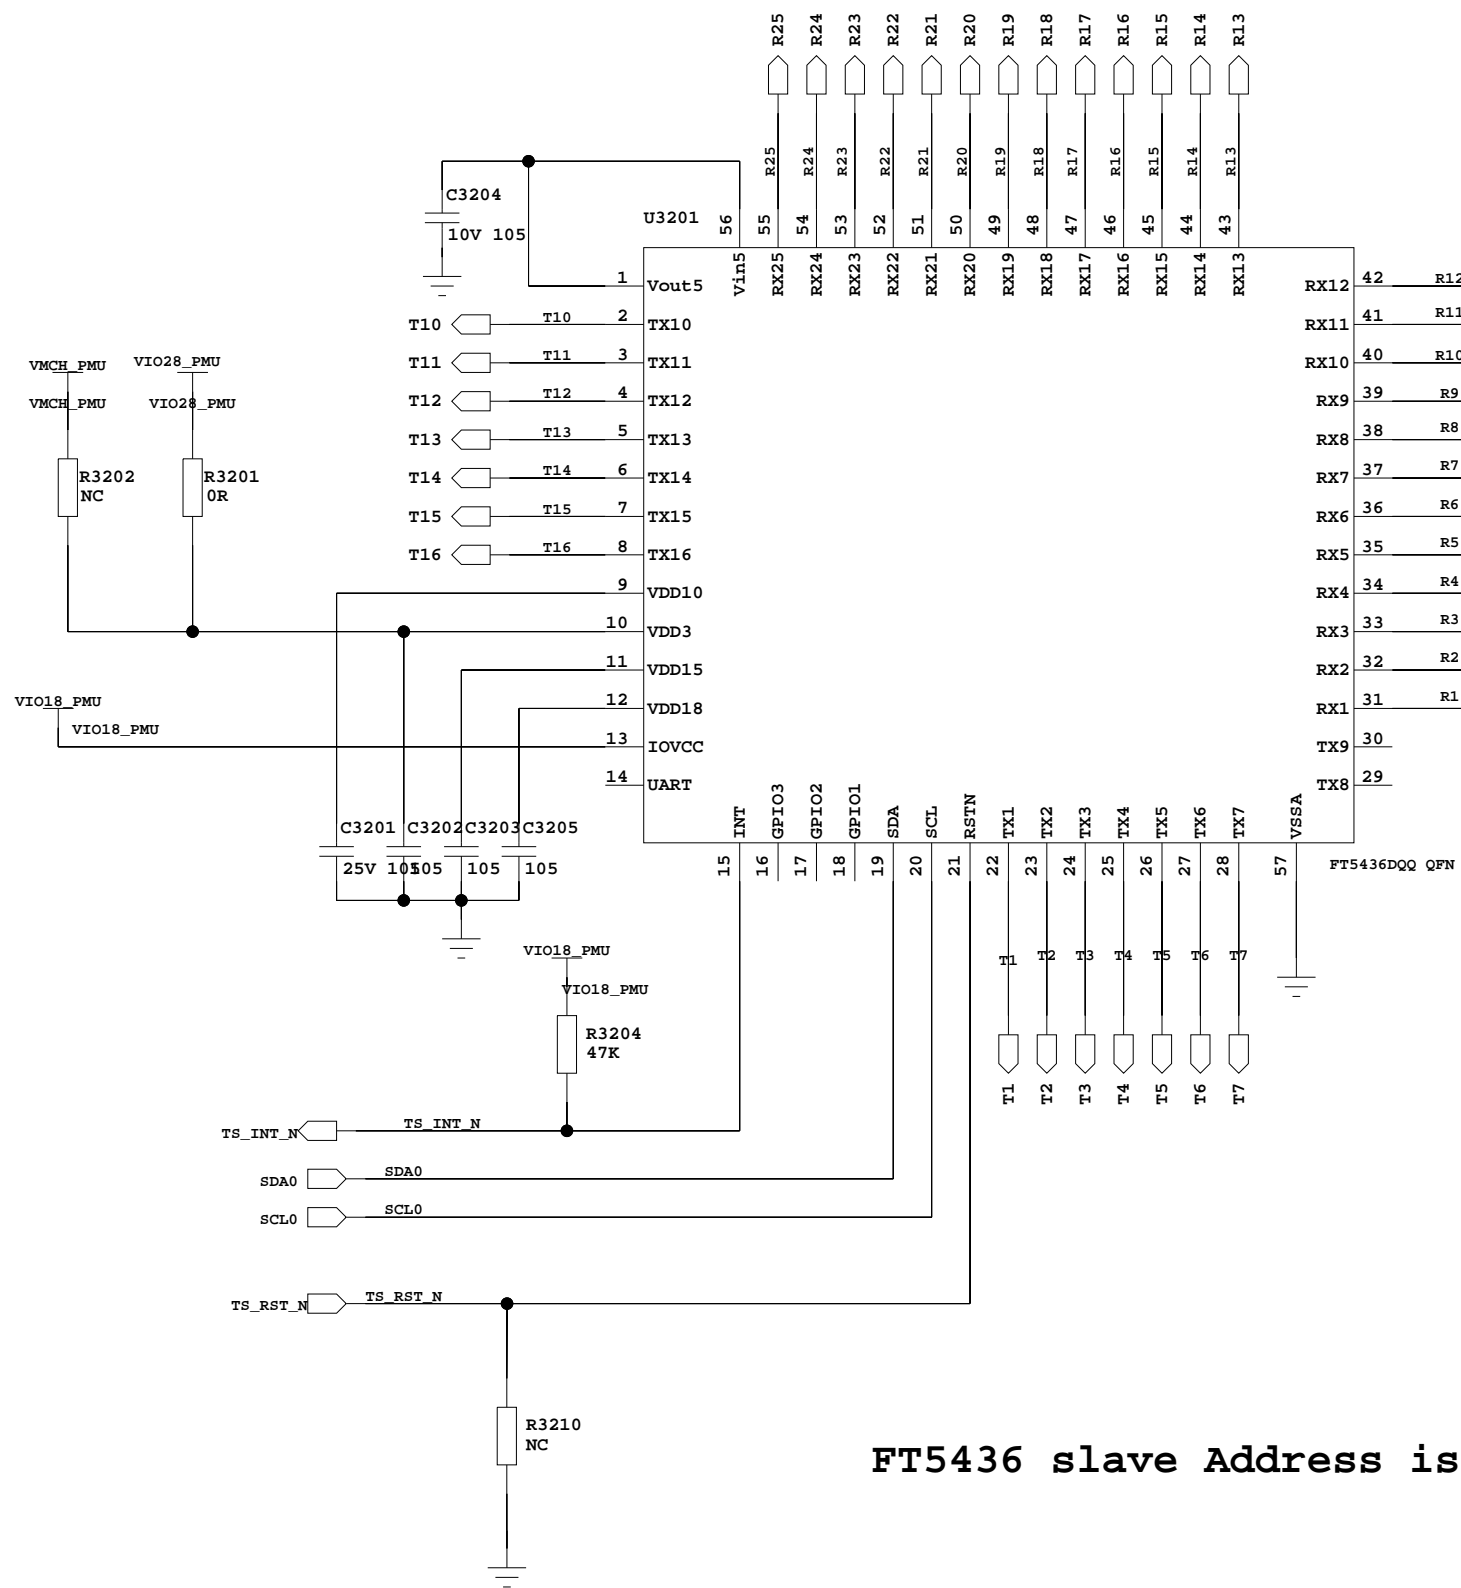

FT5436 slave Address is 0x38

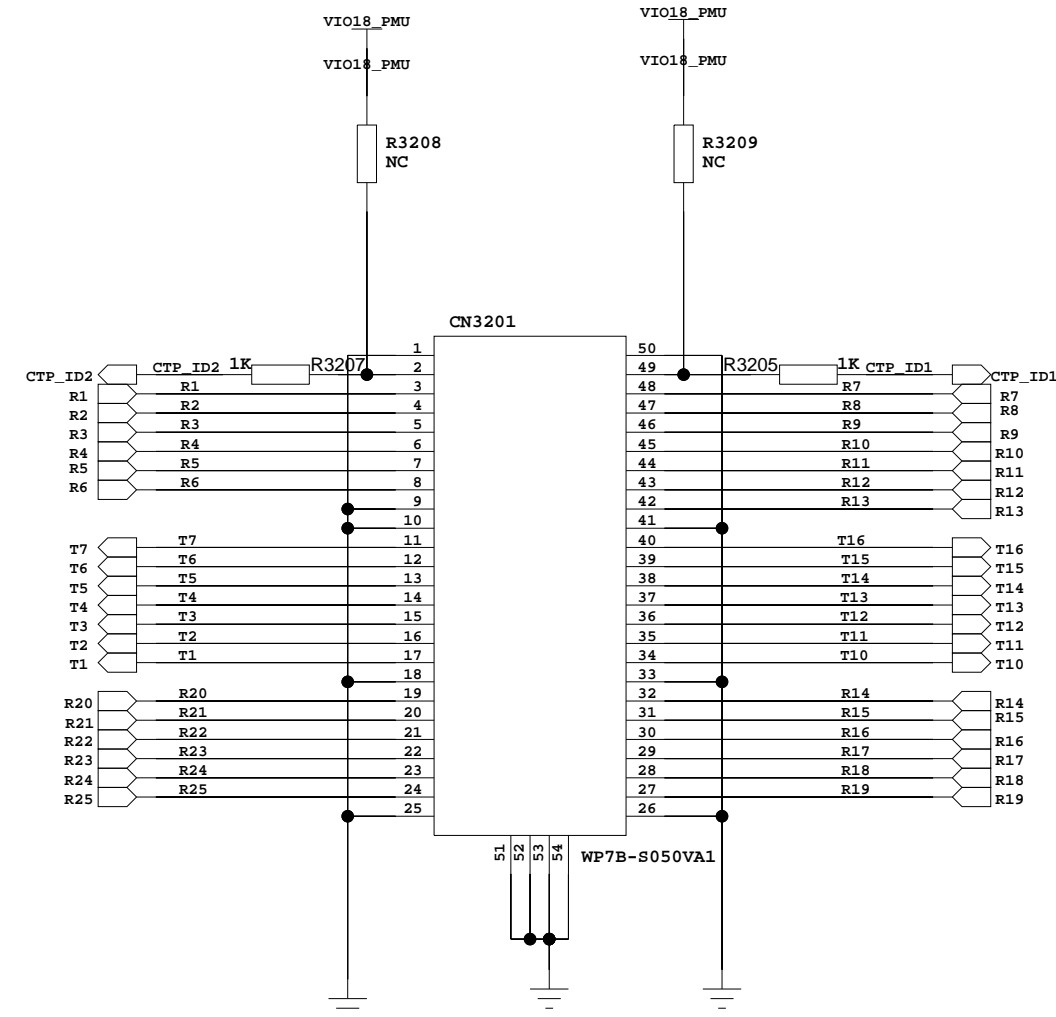

TXÖTXÖ®¼ä ; çRXÖRXÖ®¼ä ; ÊÊÎÔâµ÷Õû ·½±ã×ßİß

