

K1 sling #		Content	K1 sling #	Content
1		Contents Table	21	WTR2605_Power_Secondary path
2		Reversion history	22	WTR2605_Secondary path
3		Block Diagram	23	WIFI/BT
4		GPIO Map	24	GPS/APT/XO distribution
5		MSM8x26_Control_1	25	Audio
6		MSM8x26_Control_2	26	Sensors
7		MSM8x26_GPIO	27	Memory
8		MSM8x26_Power_1	28	MultiMedia
9		MSM8x26_Power_2	29	Interface
10		MSM8x26_GND	30	Change List
11		PM8226_PWR		
12		PM8226_Control_1		
12		PM8226_Control_2		
14		PRX Matching_Primary path		
15		WTR2605_Power_Primary path		
16		WTR2605_Primary path		
17		WTR2605_TXM_Primary path		
18		UMTS B1&B8_Primary path		
19		UMTS B2_Primary path		
20		WTR2605_GSM_Secondary path		

Revision History

SCHEMATIC MCN	HW VERSION	VERSION	DESCRIPTION OF CHANGE
LD20-NC003	EVT2.0	A	EVT2.0 Initial release
		B	Please refer to Item 1 in "Change List " page
		C	Please refer to Item 2 to Item 4 in "Change List " page
		D	Please refer to Item 5 in "Change List " page
		E	Please refer to Item 6 to Item 8 in "Change List " page





MSM8x26 GPIO Configuration For QRD8x26					
GPIO_0	NC	GPIO_41	WCSS_WLAN_DATA1	GPIO_82	CH0_PA_RANGE1
GPIO_1	NC	GPIO_42	WCSS_WLAN_DATA0	GPIO_83	CH0_TXM_CTL1_SW1
GPIO_2	NC	GPIO_43	WCSS_WLAN_SET	GPIO_84	CH0_TXM_CTL2_SW0
GPIO_3	NC	GPIO_44	WCSS_WLAN_CLK	GPIO_85	CH0_GSM_PA_ON_HB
GPIO_4	NC	GPIO_45	WCSS_FM_SSBI	GPIO_86	CH0_GSM_PA_ON_LB
GPIO_5	NC	GPIO_46	WCSS_FM_SDI	GPIO_87	TX_GTR_THRESH
GPIO_6	I2C2_SDA_SENS	GPIO_47	WCSS_BT_CTL	GPIO_88	NC
GPIO_7	I2C2_SCL_SENS	GPIO_48	WCSS_BT_DAT_STB	GPIO_89	NC
GPIO_8	UART3_TX	GPIO_49	NC	GPIO_90	NC
GPIO_9	UART3_RX	GPIO_50	NC	GPIO_91	NC
GPIO_10	I2C6_SDA_NFC	GPIO_51	NC	GPIO_92	NC
GPIO_11	I2C6_SCL_NFC	GPIO_52	NC	GPIO_93	NC
GPIO_12	NC	GPIO_53	UIM2_DATA	GPIO_94	NC
GPIO_13	MSM_HS_DET	GPIO_54	UIM2_CLK	GPIO_95	CH0_GSM_TX_PHASE_D0
GPIO_14	NC	GPIO_55	UIM2_RST	GPIO_96	CH0_GSM_TX_PHASE_D1
GPIO_15	CAM_1VB_EN	GPIO_56	NC	GPIO_97	NC
GPIO_16	CTP_RST_N	GPIO_57	UIM1_DATA	GPIO_98	NC
GPIO_17	CTP_INT	GPIO_58	UIM1_CLK	GPIO_99	NC
GPIO_18	I2C5_SDA_CTP	GPIO_59	UIM1_RST	GPIO_100	NC
GPIO_19	I2C5_SCL_CTP	GPIO_60	LCD_ID	GPIO_101	CH0_SSBI_PRX
GPIO_20	NFC_DISABLE_N	GPIO_61	BATT_UIM_ALARM	GPIO_102	CH0_SSBI_TX_GPS
GPIO_21	NFC_INT_N	GPIO_62	NC	GPIO_103	NC
GPIO_22	SPI_CS_EHT	GPIO_63	ACCL_INT1_N	GPIO_104	NC
GPIO_23	NC	GPIO_64	NC	GPIO_105	GPS_ELNA_EN
GPIO_24	DSI_LCD_TE	GPIO_65	ALSP_INT_N	GPIO_106	VOLUME+
GPIO_25	DSI_LCD_RST	GPIO_66	MAG_INT_N	GPIO_107	VOLUME-
GPIO_26	CAM_MCLK0	GPIO_67	MSM_CODEC_REF_CLK	GPIO_108	NC
GPIO_27	NC	GPIO_68	CEDEC_INT1_N	GPIO_109	NC
GPIO_28	CAM2_RST_N	GPIO_69	NC	GPIO_110	NC
GPIO_29	I2C0_SDA_CAM	GPIO_70	CODEC_SLIMBUS_CLK	GPIO_111	NC
GPIO_30	I2C0_SCL_CAM	GPIO_71	CODEC_SLIMBUS_DATA	GPIO_112	NC
GPIO_31	NC	GPIO_72	CODEC_RST_N	GPIO_113	FORCE_USB_BOOT
GPIO_32	FLASH_STROBE_TRIG	GPIO_73	FORT_CAM_ID	GPIO_114	NC
GPIO_33	NC	GPIO_74	BACK_CAM_ID	GPIO_115	NC
GPIO_34	NC	GPIO_75	CH0_PA_ON4_B1	GPIO_116	NC
GPIO_35	CAM2_STANDBY	GPIO_76	NC	GPIO_117	NC
GPIO_36	CAM1_STANDBY	GPIO_77	WTR0_GSM_TDS_SEL	GPIO_118	NC
GPIO_37	CAM1_RST_N	GPIO_78	CH0_PA_ON1_B8	GPIO_119	NC
GPIO_38	NC	GPIO_79	CH0_TXM_CTL0_SPDT	GPIO_120	NC
GPIO_39	WCSS_BT_SSBI	GPIO_80	CH0_WTR_RF_ON		
GPIO_40	WCSS_WLAN_DATA2	GPIO_81	CH0_PA_RANGEO (BOOT_CONFIG_0)		

PM8026 GPIO/MPP Configuration For QRD8x26			
GPIO_1	AUDIO_REF_CLK (DIVCLK1)	MPP_1	VREF_PX
GPIO_2	EXT_5VBOOST_EN	MPP_2	HR_LED_SNK
GPIO_3	B8CLK2_EN	MPP_3	VREF_LDO
GPIO_4	BATT_UICC_ALARM	MPP_4	LED1_SINK
GPIO_5	FLASHNOW	MPP_5	PA2_THERM
GPIO_6	CABC_WLED	MPP_6	LED2_SINK
GPIO_7	TX_GTR_THRESH	MPP_7	HWID
GPIO_8	SYS_BOOST_FORCE_BYP	MPP_8	PA1_THERM


I2C Address List For QRD8x26				
I2C GPIO	Device	MPN	Write Address	Read Address
GPIO[6:7]	Accelerometer	BMA222E	0x31	0x30
	Magnetometer	HSCDT007A	0x19	0x18
	Gyroscope	MPU-3050C	0xD1	0xD0
	ALS/Proximity	TMD27713T	0x73	0x72
GPIO[18:19]	Touch Screen	S3202	0x41	0x40
GPIO[29:30]	Front Camera	OV9724	0x41	0x40
	Rear Camera	OV8825	0x6D	0x6C

Interrupt List For QRD8x26			
GPIO	2019-4-08	Description	State
GPIO_11	MSM_HS_DET	Headset Plug In Detection	Active Low
GPIO_17	CTP_INT	Interrupt From CTP Sensor	Default Low /Open Drain
GPIO_38	SD_CARD_DET_N	SD Card Insert Detection	Insert Low/Remove High
GPIO_49	ACCL_INT2_N	Interrupt2 From Accelerometer	Default High/Push-Pull
GPIO_63	ACCL_INT1_N	Interrupt1 From Accelerometer	Default High/Push-Pull
GPIO_64	GYRO_INT_N	Interrupt From Gyroscope	Default High/Push-Pull
GPIO_65	ALSP_INT_N	Interrupt From ALS/Proximity	Active Low /Open Drain
GPIO_66	MAG_INT_N	Interrupt From Magnetometer	Active High /Push-pull
GPIO_68	CODEC_INT1_N	Interrupt From CODEC	PA1_THERM
GPIO_115	ETH_INT_N	Interrupt From Ethernet Driver	Active Low /Push-pull


				Oppo	
				Rev: 0000	
				Date: 2019-04-08	
				By: 0000	

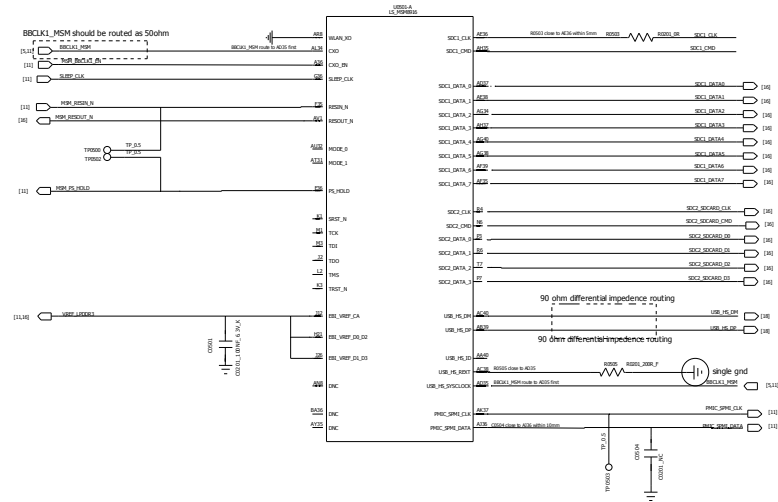



MIPI DSI signal: 100 ohm differential impedance routing

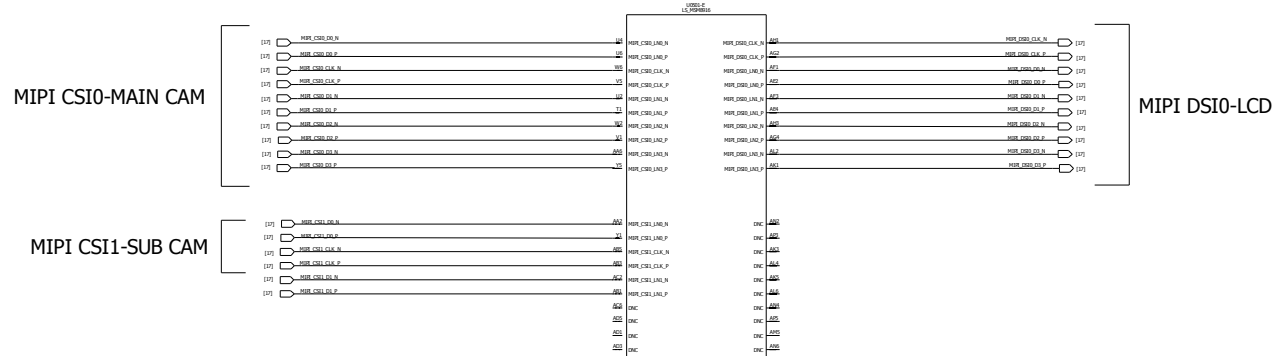






MIPI CSI signal: 100 ohm differential impedance routing

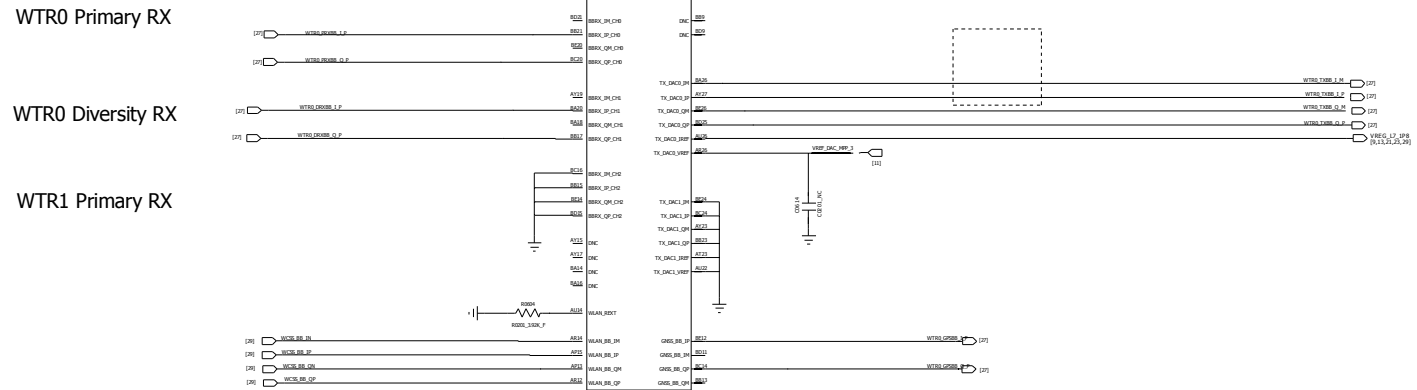


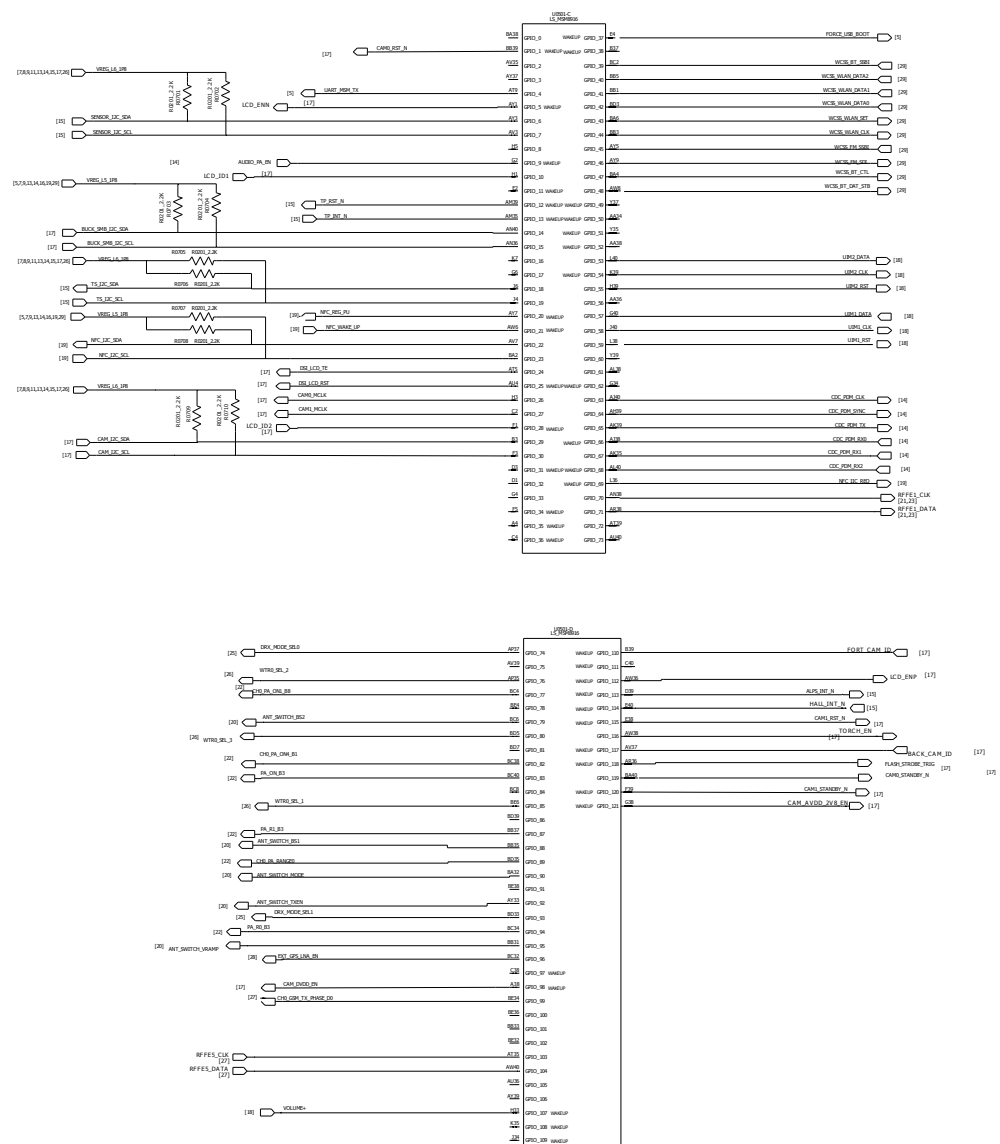


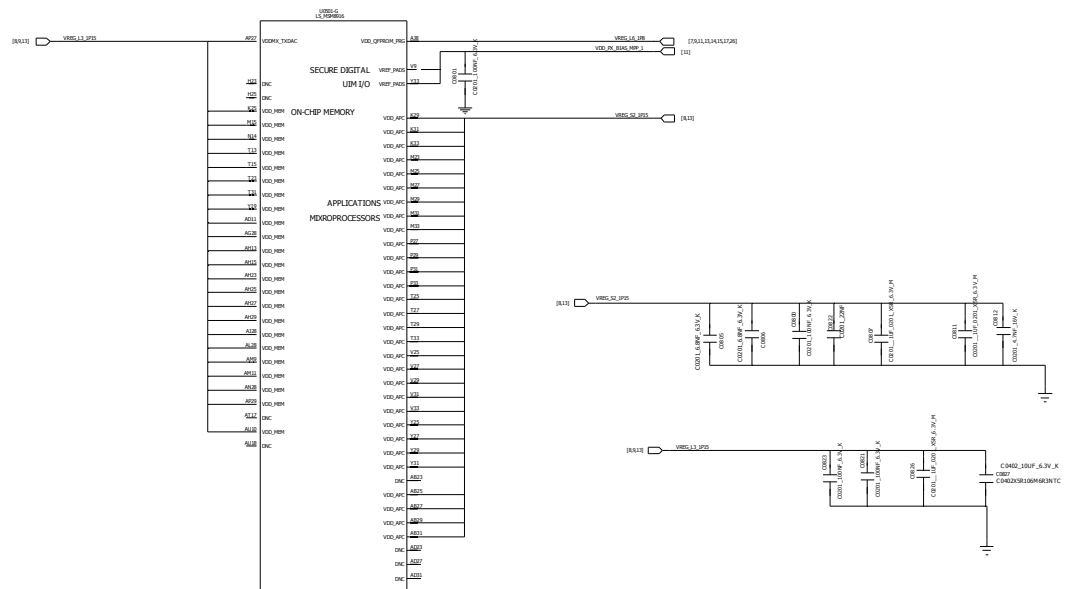






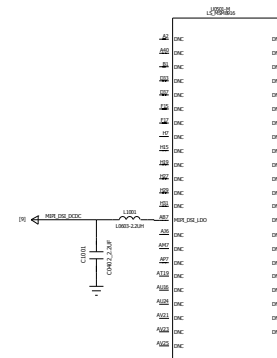
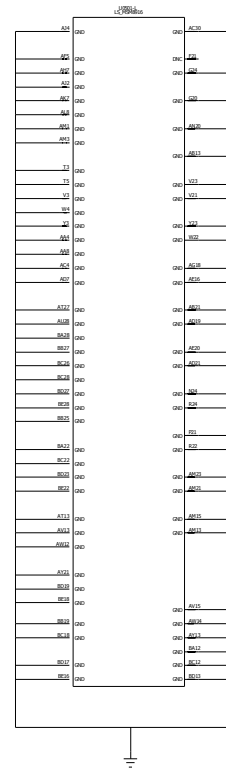
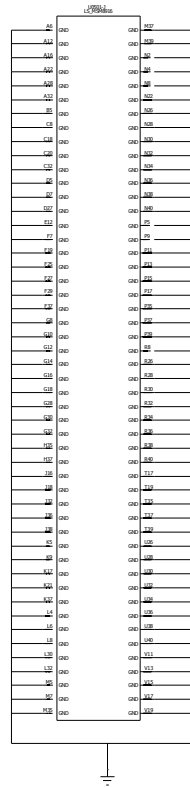
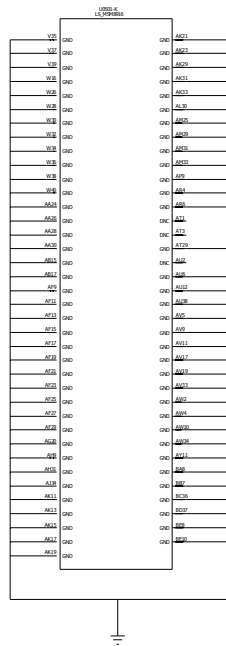




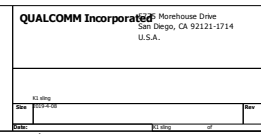



耳机按键通过MIC_BIAS2实现

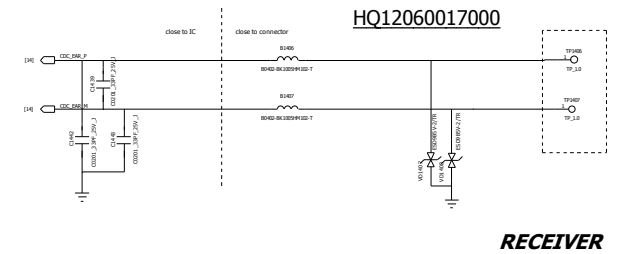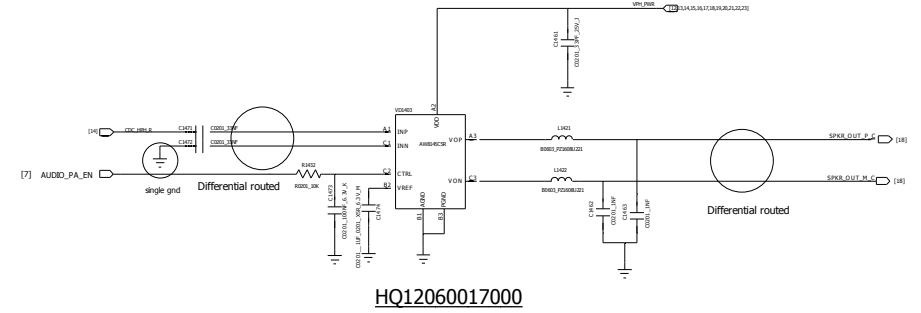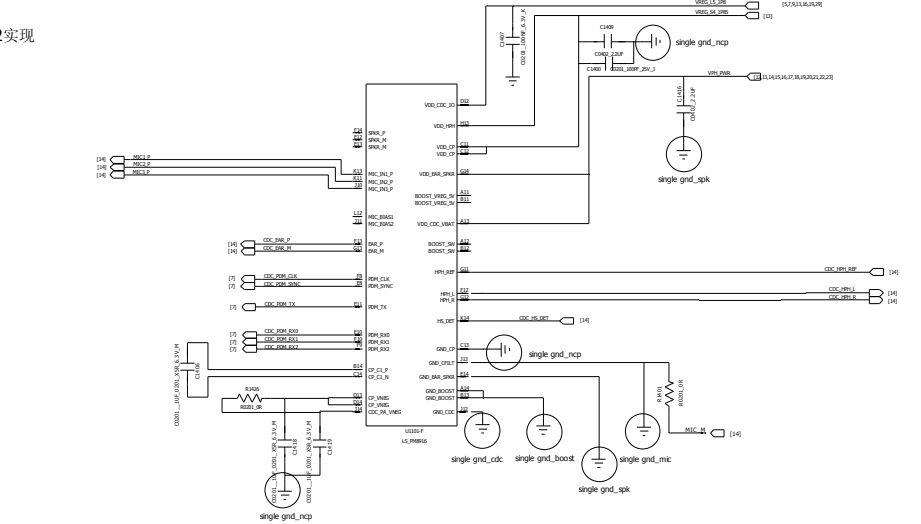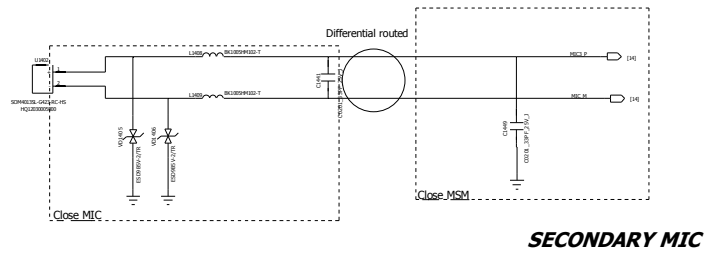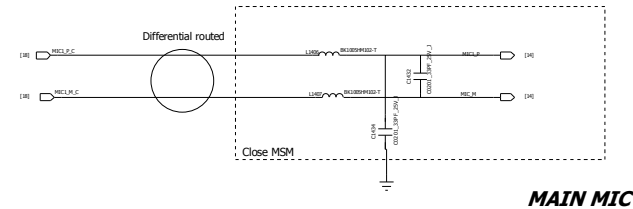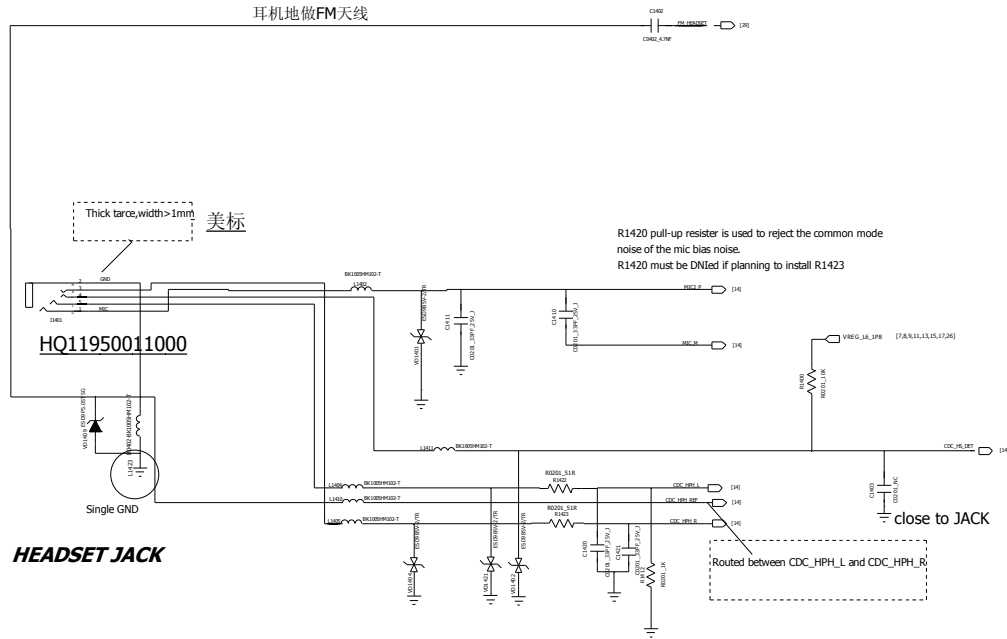

QUALCOMM Incorporated

Morehouse Drive
San Diego, CA 92121-1714
U.S.A.



Rev 1.0

[illegible]


Read · 0 0 0 1 1 1 1 1: 0x1FH

DEL 3x3


AP3216D //STK3310


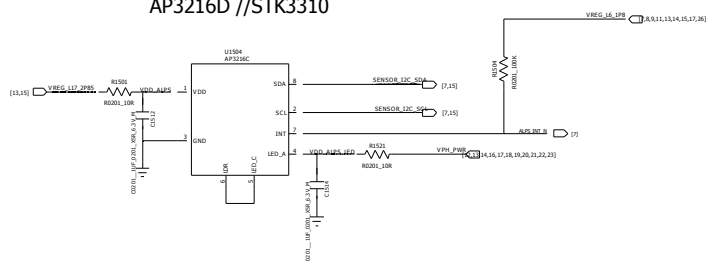
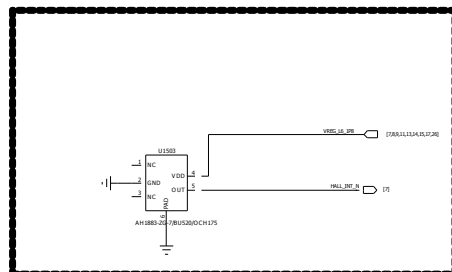
**ALS+PS**


Ha 11

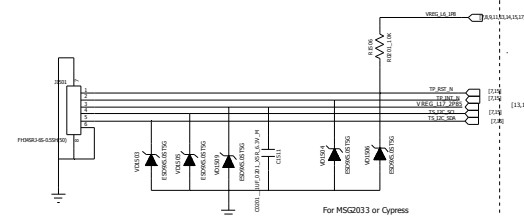




Capacitor Touch Panel

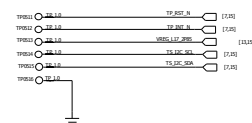


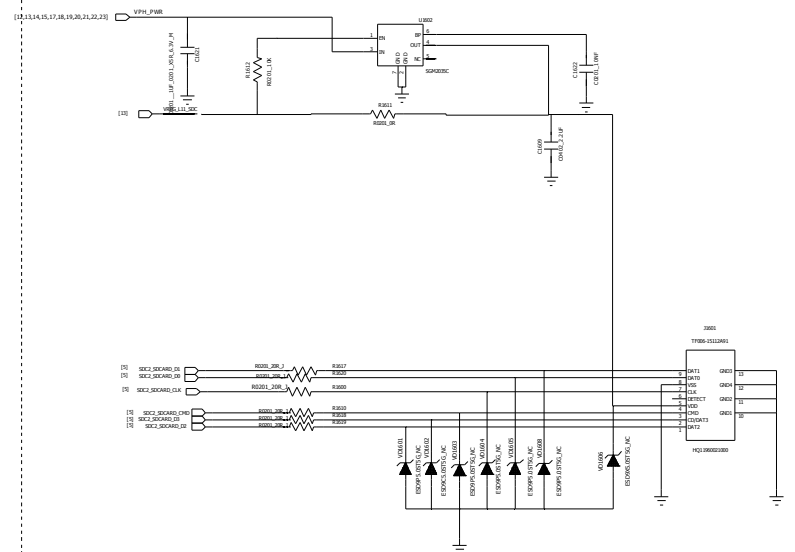

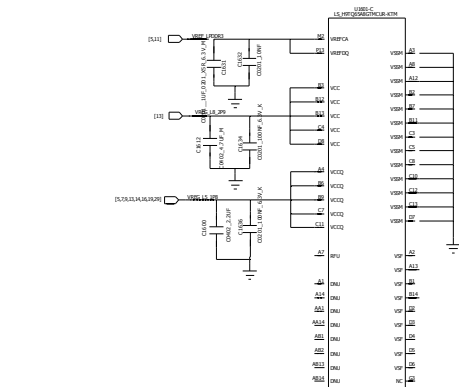


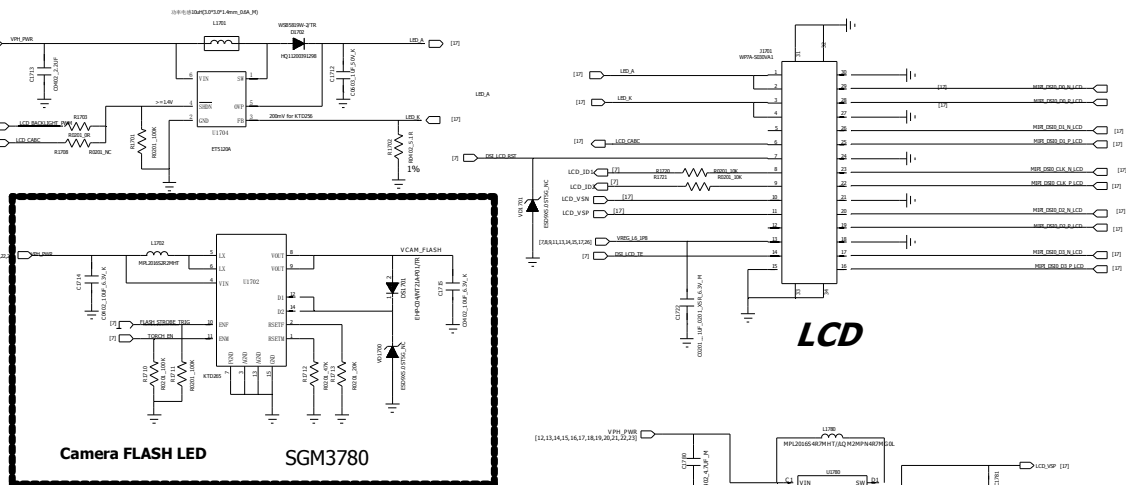


Main CAMERA 8M/13M

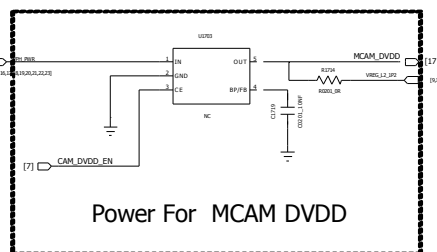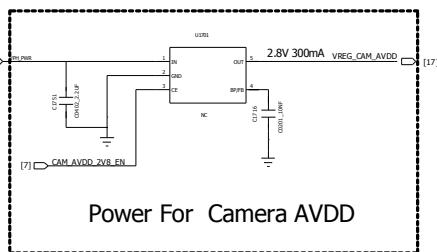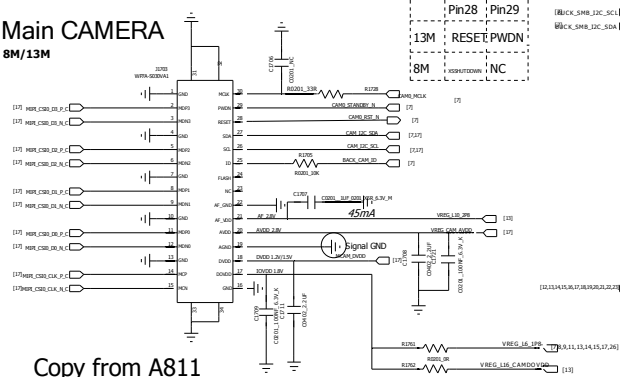





Sub CAMERA 5M/2M



Main CAMERA

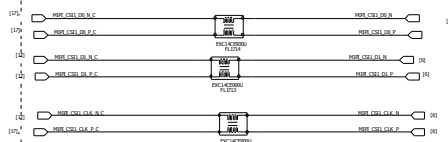

LCD




QUALCOMM Incorporated



Morehouse Drive
San Diego, CA 92121-1714
U.S.A.

Rev. 1.0
Date: 2014-01-08
Page: 1 of 1

Camera




彈片接A壳

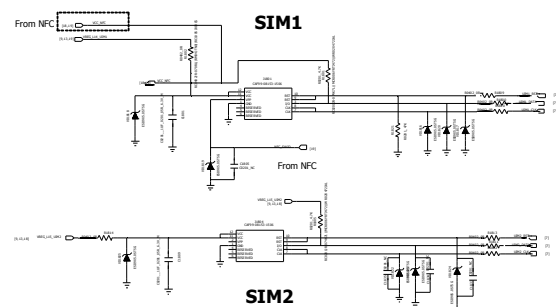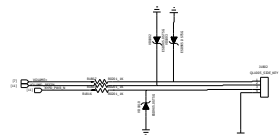***SIM Card***

Power Key

Side Key


SIDE KEY

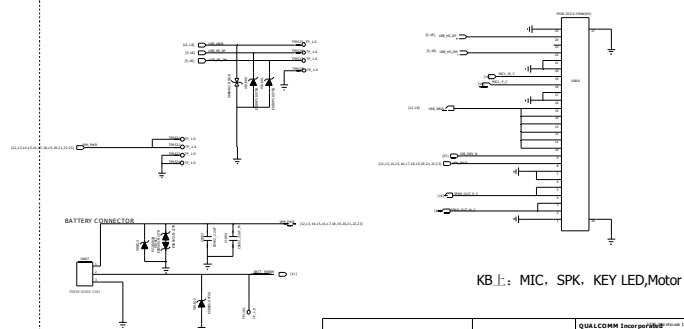


KB上: MIC, SPK, KEY LED, Motor

Sub Board Connector


QUALCOMM Incorporated
3700 La Jolla Village Drive
San Diego, CA 92121-1704
U.S.A.

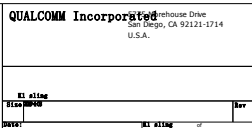[illegible]



RF MAIN SWICH

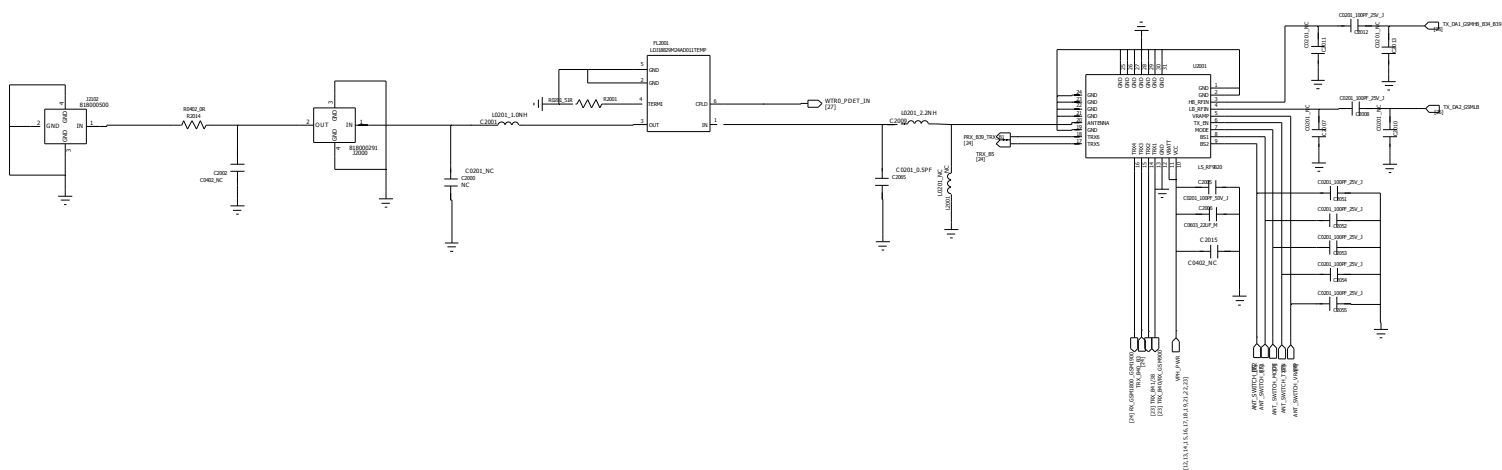


NOT TO BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM.

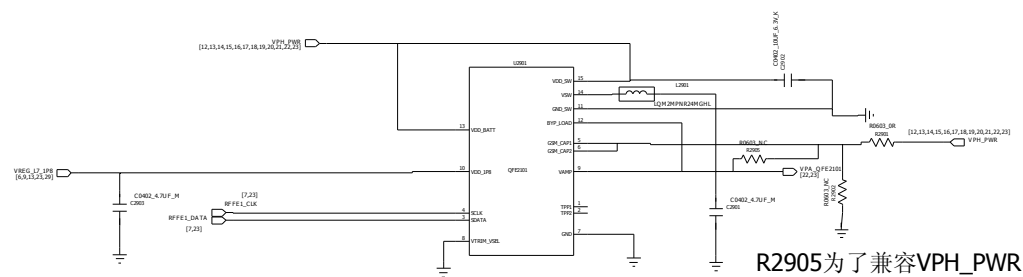


B1 B3 B5 PA

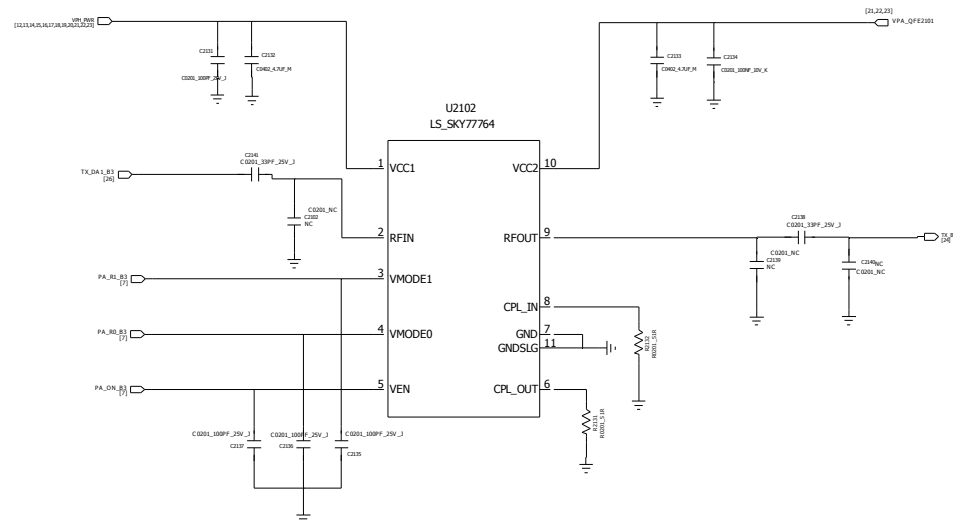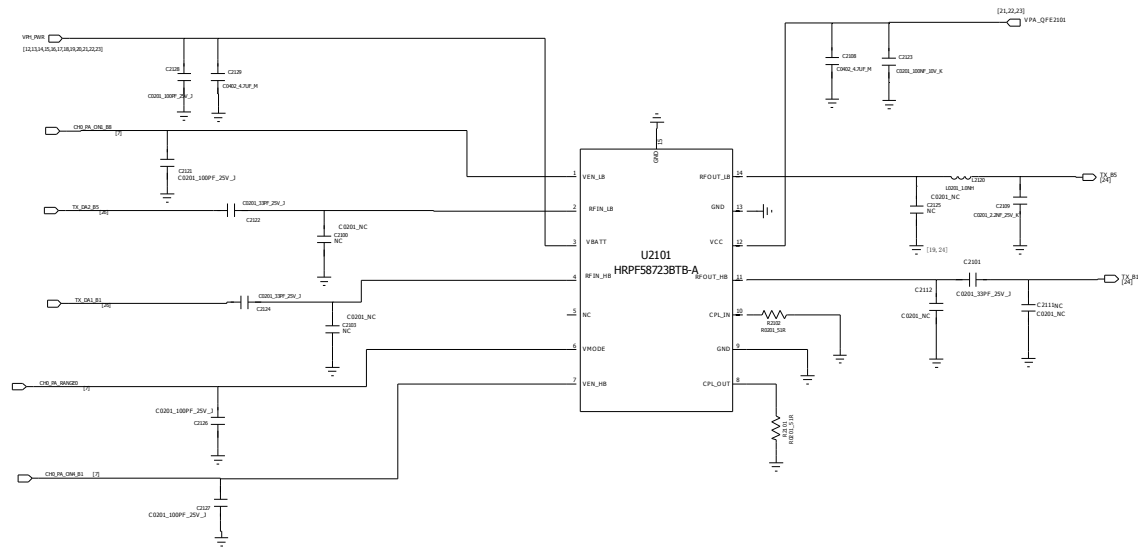


•

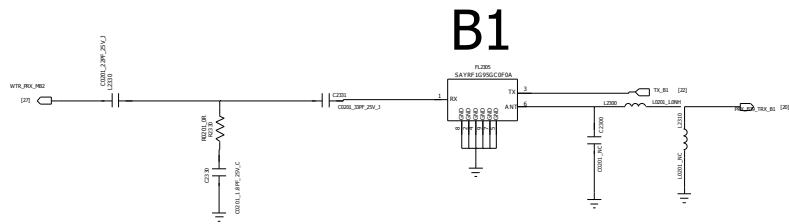

B1

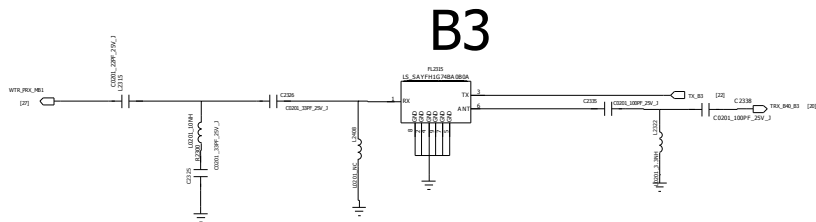


B3

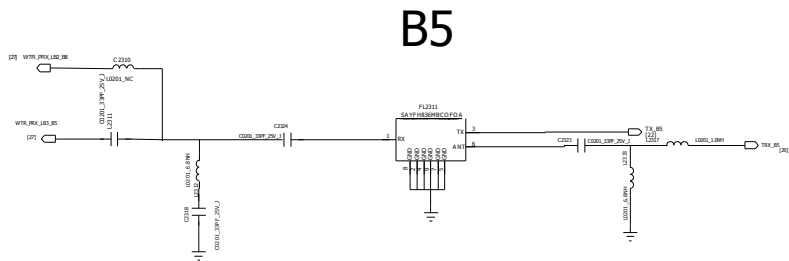





B5

RX GSM900


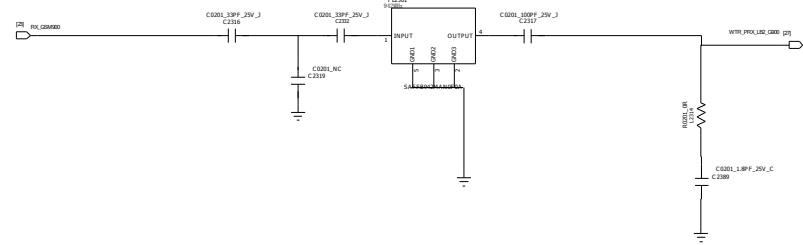


RX GSM1900

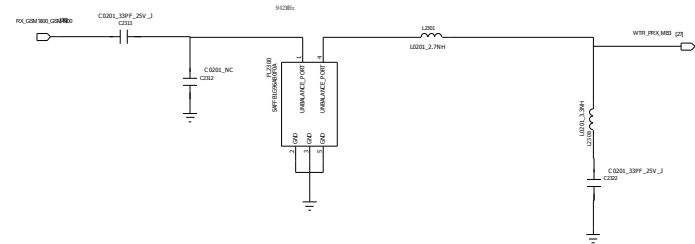


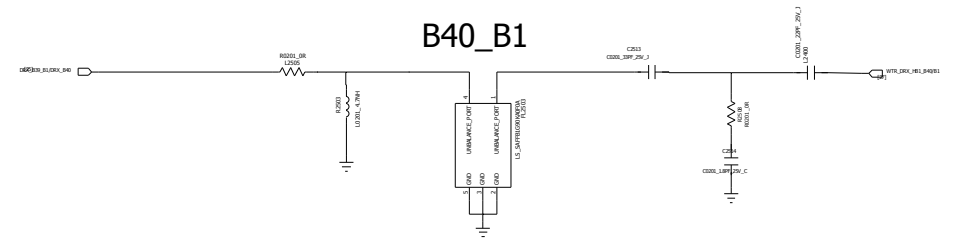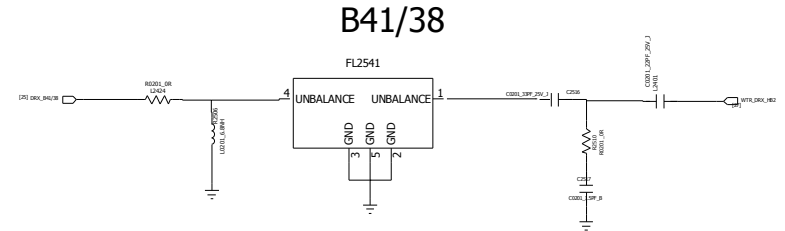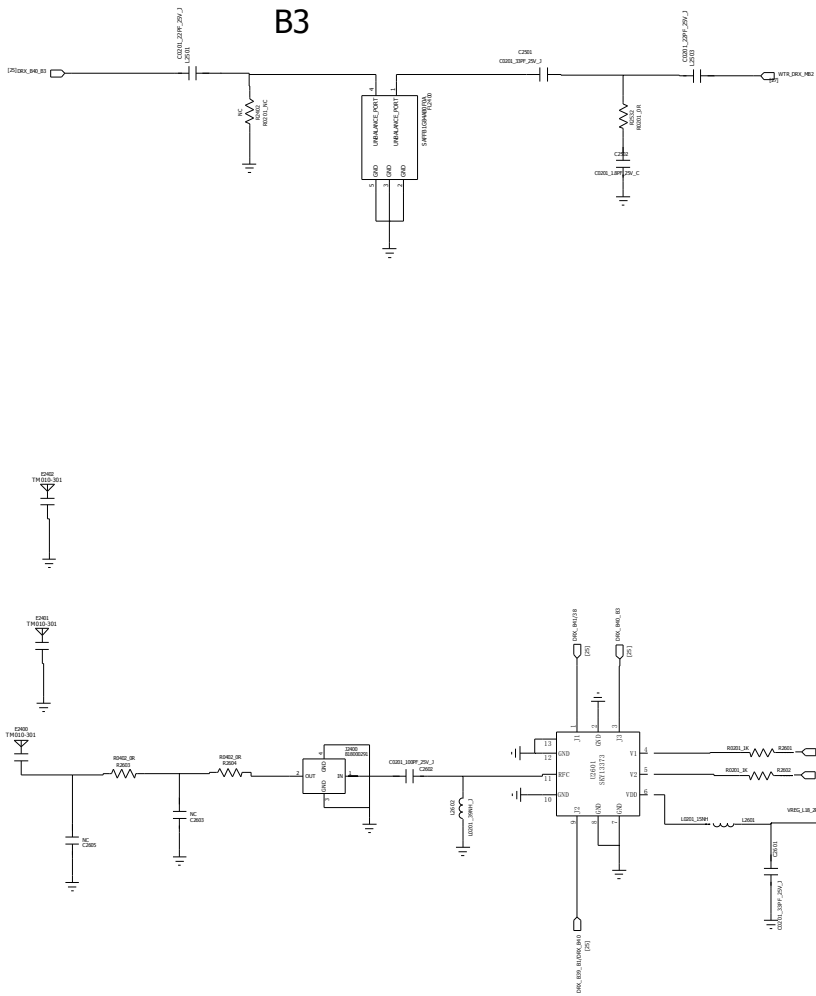


TX_DA_SW

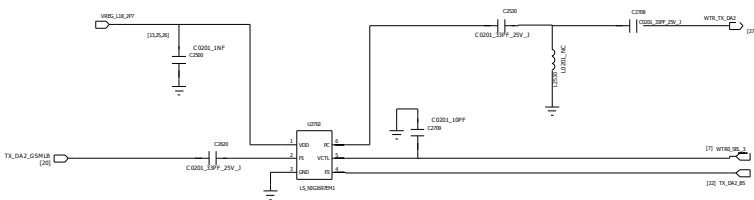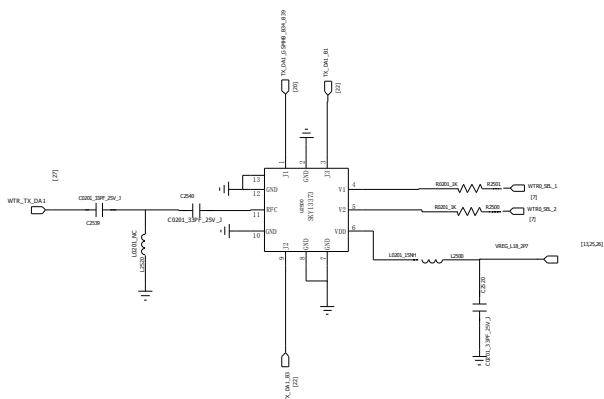

PA_THERMAL


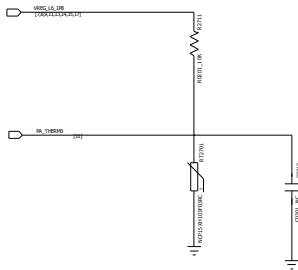


需要确定用哪个电


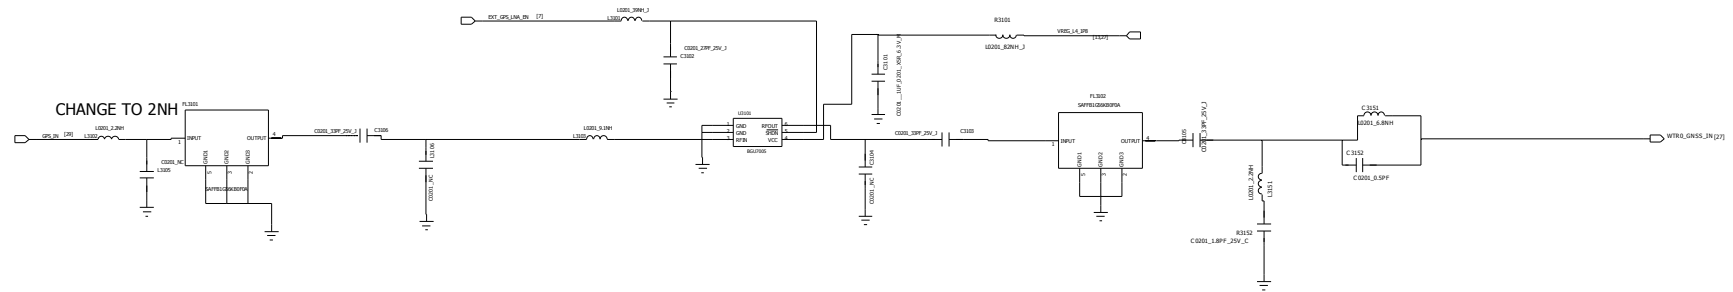


The schematic diagram shows a signal path from WTR_M0_01A [10] through a 0.000100000000000000 F capacitor, a 0.000100000000000000 F capacitor, and a 0.000100000000000000 F resistor to WTR_M0_01 [20]. There is also a 0.000100000000000000 F capacitor connected to ground.

WIFI/BT/FM

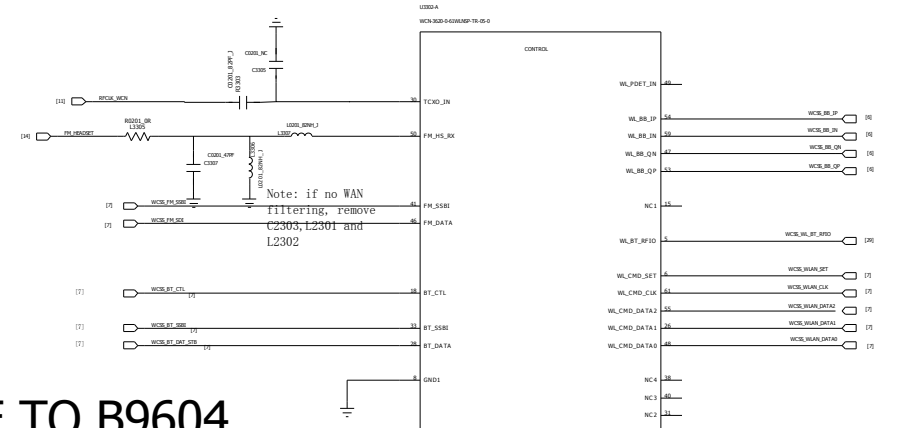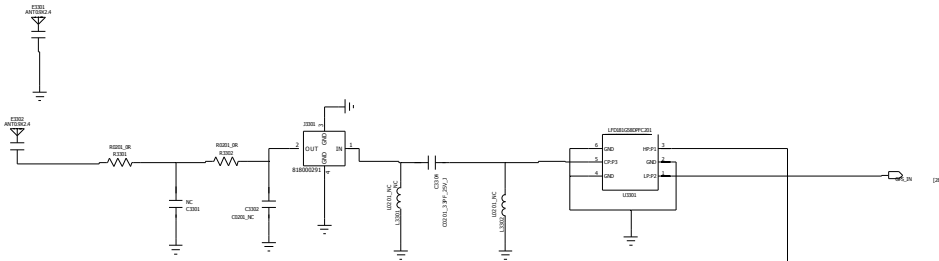

CHANGE TO B9604

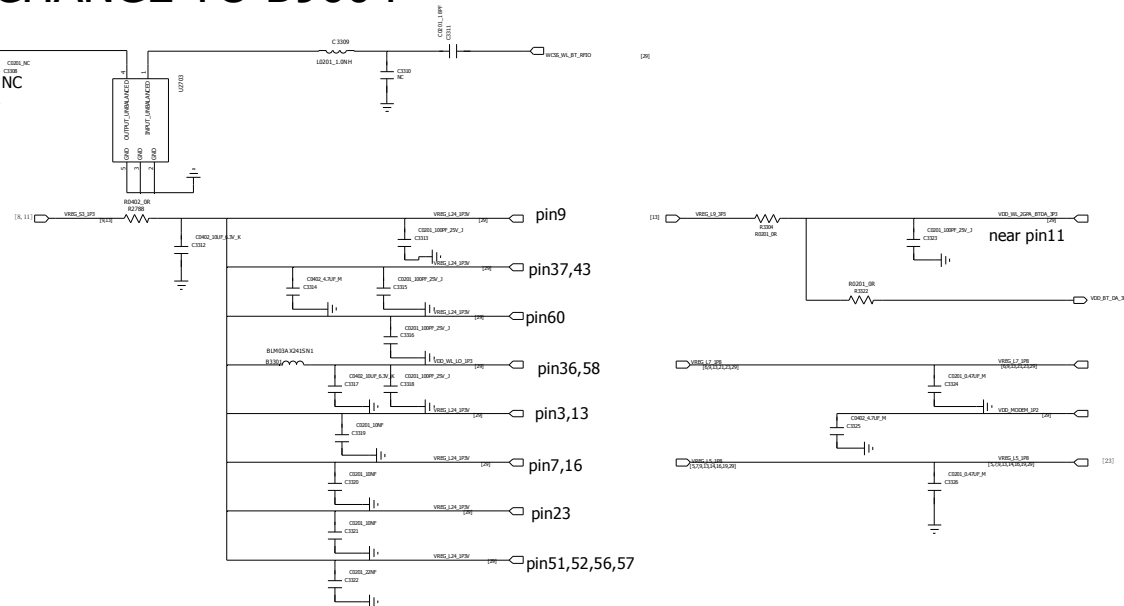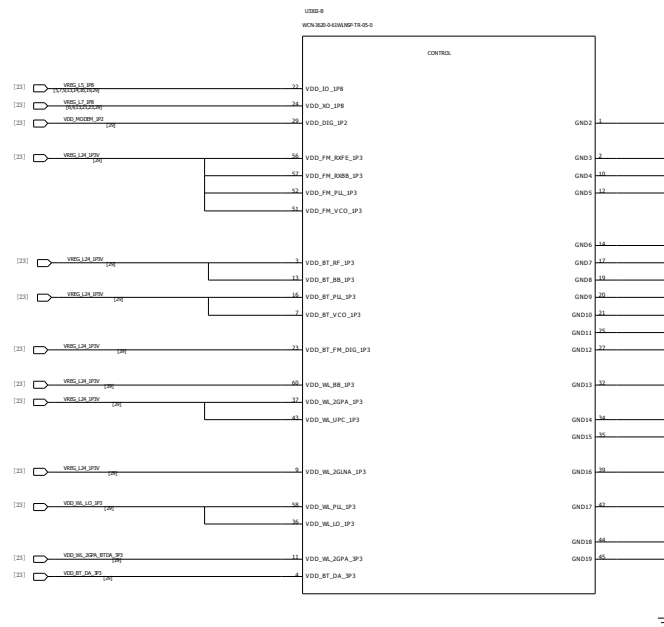

NOT TO BE USED. COPIES REPRODUCED IN WHOLE OR IN PART, FOR ANY PURPOSES, WITHOUT THE WRITTEN PERMISSION OF QUALCOMM.

QUALCOMM Incorporated
San Diego, CA 92121-1714
U.S.A.

Rev. 1.0
Date: 10/10/09