TUF-RTX3080-10G-GAMING

Repair Guide

Model List

Model name	60PN	GPU	Date		
TUF-RTX3080-10G-	YV0FB0	CG132P3	2020/9/28		
GAMING					

STANDARD APPEARANCE

TUF-RTX3080-10G-GAMING









BLOCK DIAGRAM




VOLTAGE MEASURE POINT

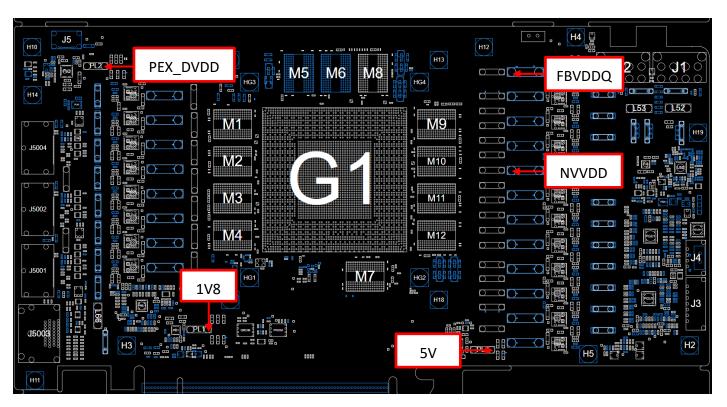

POWER FLOW

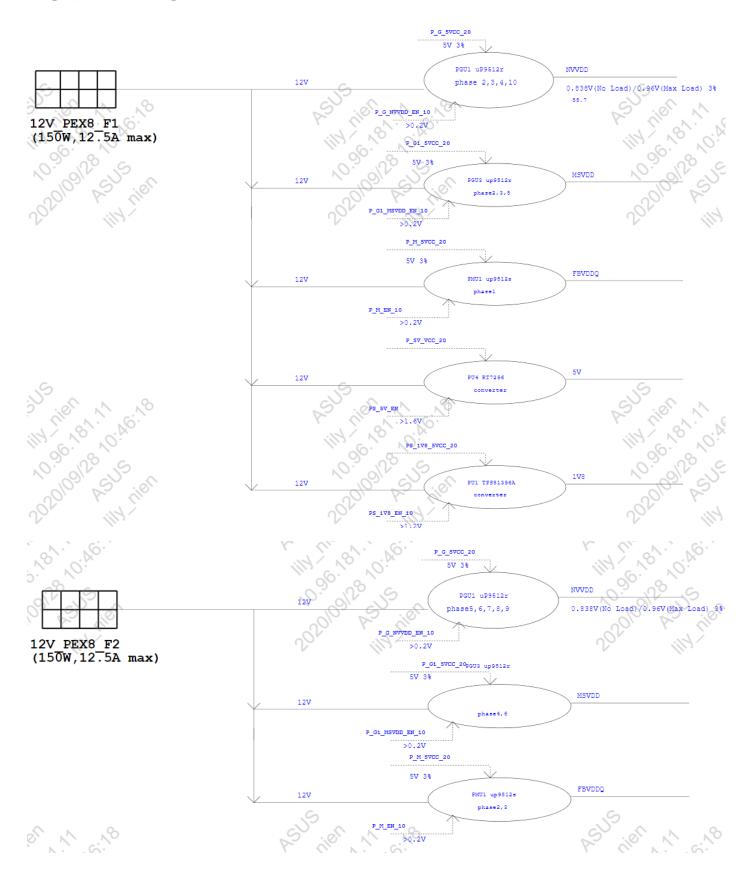

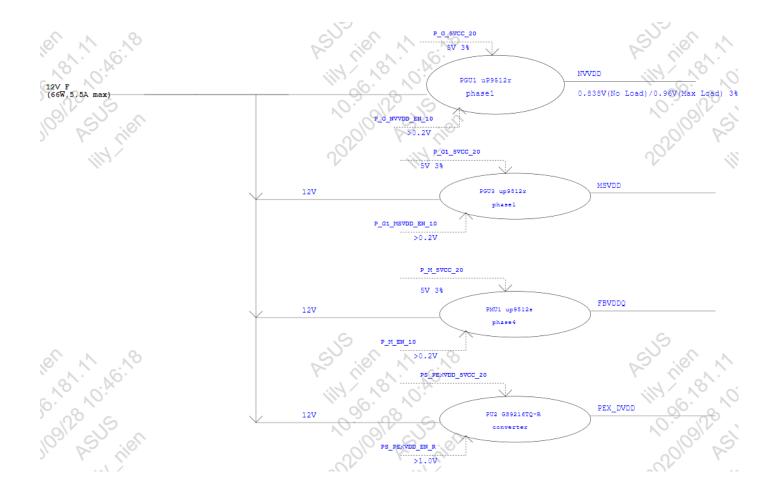

BGA REFLOW PROFILE



TCs	温度最高上升斜率		温度最高下降斜率		預热 30至120℃		恒温时间150至185℃		回流时间 /220℃		
<tc2></tc2>	1.63	9%	-1.22	78%	92.86	10%	76.54	-45%	83.17	84%	244.90
<tc3></tc3>	1.51	1%	-1.19	81%	92.26	8%	77.19	-43%	83.14	84%	244.01
<tc5></tc5>	1.51	0%	-1.15	85%	93.18	11%	75.30	-49%	78.40	73%	242.84
<tc7></tc7>	1.55	4%	-1.37	63%	91.85	6%	78.23	-39%	82.31	82%	246.45
<tc9></tc9>	1.55	4%	-1.29	71%	92.52	8%	77.63	-41%	82.96	84%	246.17
温差	0.12		0.22		1.33		2.93		4.77		3.61
P. <tc2></tc2>	1.69	12%	-1.23	77%	89.49	-2%	69.48	-68%	77.06	70%	243.30
P. <tc3></tc3>	1.57	5%	-1.22	78%	89.23	-3%	69.76	-67%	76.88	70%	242.36
					I						, , , , , , , , , , , , , , , , , , ,
	1						•				

	P.W.I.	公分分	温区 1	温区 2	温区 3	温区 4	温区 5	温区 6	温区 7	温区 8	温区 9	温区 10	温区 11	温区 12
原本上温区	85%	70.0	130	155	200	175	175	180	200	245	270	270	210	190
原本下温区	0376	70.0	130	155	200	175	175	180	200	245	270	270	210	190
预测上温区	81%	74.1	130	155	200	175	175	180	200	245	270	270	210	190
预测下温区	0170	14.1	130	155	200	175	175	180	200	245	270	270	210	190